

CATALOG 2026



INDEX

• Leading the Future of CCTV Solutions.....	1
• Global presence	2
• Stepping Stones	2
• Discover More On The Provision-Isr Website.....	3
• Protecting your privacy.....	4
• AI-Powered Video Analysis:	5
• A New Era of Surveillance.....	5
• Ossia O.S.	8
• VMS - Video Management Software	11
• Provision CAM 2 Mobile APP	15
• IP Series	17
• IP Cameras - Model Name Index	17
• Analytics Table	18
• Rainbow 3.0.....	19
• Where Light Meets Reality.....	20
• PTZ Cameras - Model Name Index	21
• the new intercom system.....	42
• Video Intercom System.....	43
• Solar Cellular IP Camera Kit.....	45
• NVR.....	48
• NVR - Model Name Index.....	48
• Switch PoE	53
• Analog Cameras - Model Name Index.....	56
• HD PRO	57
• HD Basic.....	57
• HD Rainbow.....	60
• HD PTZ	61
• DVR - Model Name Index.....	63
• HYBRID DVR.....	64
• PRODUCT RANGE ACCESSORIES	67
• HDMI Accessories	68
• Balun / High power balun.....	70
• UPS Series.....	71
• Power supplies.....	73
• Monitor	74
• Lenses	75
• Amplified IP Horn Speaker	75
• Brackets and junction box - Dome	76
• Brackets and junction box - Bullet	77
• Brackets and junction box - PTZ	78
• Brackets and junction box - Intercom.....	79
• OSSIA VMS Dedicated Hardware	80
• CaseStudy	82
• Together is power.....	83

July 2026 Edition

Leading the Future of CCTV Solutions

Delivering Excellence in Security and Cybersecurity



Who We Are



Provision-ISR is an **Israeli multinational company** and one of the world's fastest-growing CCTV brands. We serve more than 40 countries across five continents with branches and official exclusive distributors working as partners to promote the brand in their regions.

Our Mission



At Provision-ISR, we aim to deliver **cutting-edge CCTV solutions** fortified by **state-of-the-art cybersecurity** and **advanced AI analytics** that safeguard people, property, and businesses. We're committed to providing high-quality products and exceptional support, exceeding industry standards.

Our Israeli DNA

Security Arena

Since its establishment, the geopolitical tensions that have affected Israel have prompted the industry to invest in emergency and crisis management in the security arena: **cyber security, intelligence, and critical infrastructure protection** allowing security manufacturers like Provision-ISR to gain unparalleled expertise in their field.



High-Tech and Cyber

As a Start-Up Nation, Israel is a central hub for **tech innovation**, especially in cybersecurity, positioning itself as a significant player in the broader high-tech landscape. This **commitment to excellence** extends to Provision-ISR, as we collaborate with **Check Point Software Technologies Ltd., a cybersecurity leader**. Today, more than ever, the security market must have protected and ready-to-use CCTV devices.



Our Approach and Ethics



Western Business Approach

Motivated by our Israeli DNA, our approach prioritizes lasting human connections. Grounded in respect and continual evolution, **we believe in forging enduring partnerships**. This approach reflects our commitment to collaboration, trust, and adaptability, which are essential for success in the dynamic global market.




Ethics

At Provision-ISR, our ethical commitment is a principle and a daily practice. **We safeguard every participant in the supply chain, from major distributors to small installers**, recognizing and respecting the unique professionalism each brings. Embodying a holistic approach, Provision-ISR views every link in the chain as **integral to perfection**. Those who choose Provision-ISR do so confidently, assured by the Brand's consistent demonstration of ethical values through actual actions, **encouraging trust and reliability** in every interaction.

Global presence



Stepping Stones

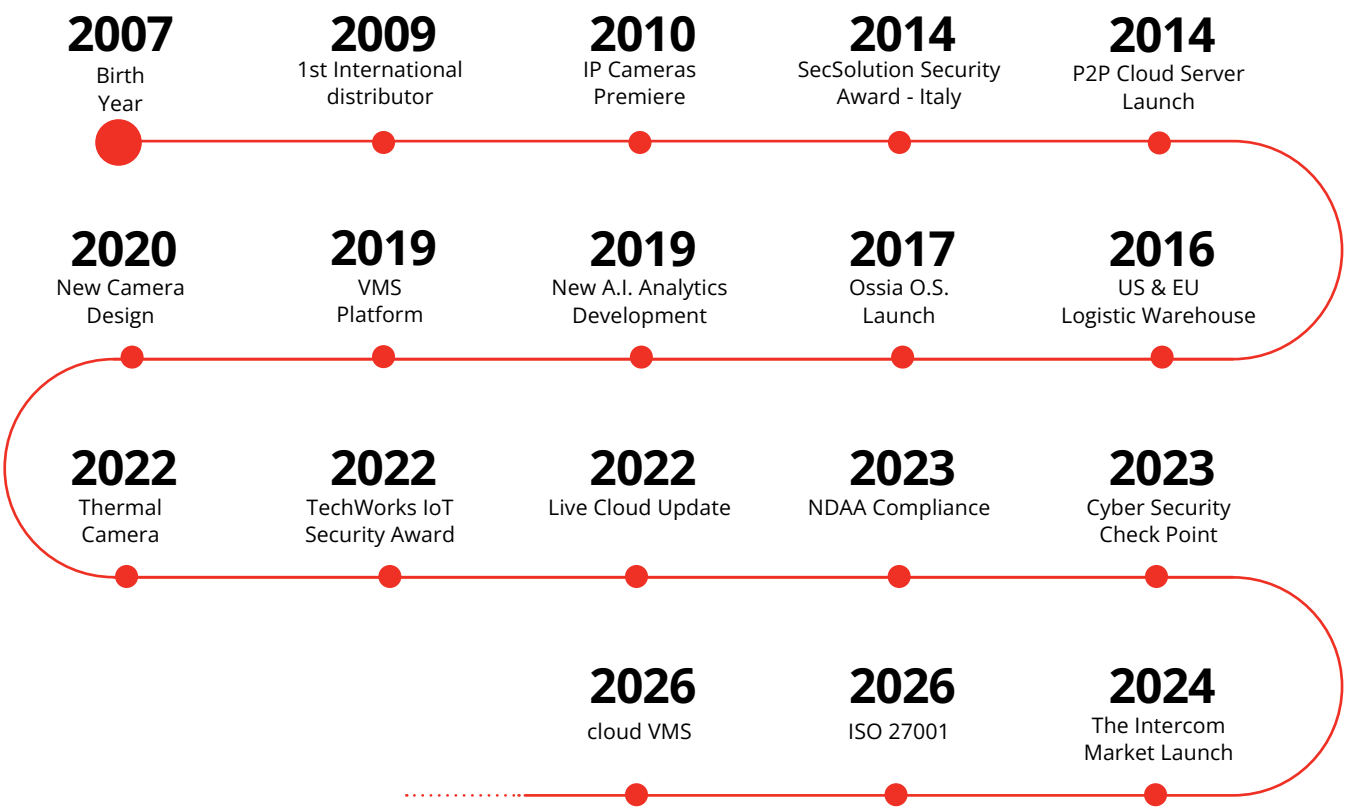

Discover More On The Provision-Isr Website

Empowering Installers and Distributors

Explore New Content Designed to Support, Educate, and Inspire. As part of our ongoing effort to **improve user experience and professional growth**, Provision-ISR has added valuable tools and resources to its website. Here are **three must-visit** sections for every installer, integrator, or partner:

Pro Tips

Get **hands-on advice** straight from our experts. Whether you're configuring smart features or solving everyday issues, these **quick guides** will sharpen your skills and simplify your workflow. **Simple. Fast. Effective.** The tips pros use every day.

Location: Website > Knowledge > Pro Tips



Vertical Markets

Access **industry-focused leaflets** designed to support sales. From retail to logistics, each one **highlights the ideal products and AI technologies** for the job. Add your **company and contact info**, then use them in pitches, quotes, or meetings. **Real solutions for real impact.**

Location: Website > Knowledge > Vertical Markets



sales tool page

Everything you need, exactly where you need it. The **Sales Tool Kit** brings together all key resources — product information, marketing materials, tools, and more — into a **single, easy-to-navigate landing page**. Find what you need **fast** and spend less time searching and more time selling.

Location: Website > Knowledge > Sales Tool Kit



Protecting your privacy

Focus in cyber security!



Cyber Security

Raising the bar in CCTV Cyber Security!

In an ever-evolving landscape of cyber threats, compromise on the cybersecurity of your CCTV is no longer an option.

In collaboration with **global cybersecurity leader Check Point Software Technologies Ltd.** and their **integrated Quantum IoT Nano agent** that provides an advanced threat prevention layer against the common attack vectors at runtime, Provision-ISR leads a revolution in the CCTV industry, ensuring **unparalleled protection** against emerging threats.



NDAA

Provision-ISR is committed to offering products that **adhere to the exacting regulations** of the U.S. Department of Defence outlined in **Section 889 of the NDAA**.

In today's interconnected world, where security is paramount and threats of espionage dominate, **Provision-ISR guarantees product delivery that meets the highest security and regulatory requirements.**



GDPR

Since May 2018, the enactment of the European Privacy Regulation 2016/679, commonly referred to as GDPR (General Data Protection Regulation), has set the standard for safeguarding personal data.

At Provision-ISR, our **unwavering commitment to compliance** ensures that the information we retain as a manufacturer **remains secure and private**, and all our products strictly **adhere to the European GDPR**.



ISO/IEC 27001

Security extends beyond our products.

ISO/IEC 27001 is the internationally recognized standard for **Information Security Management Systems (ISMS)**, helping organizations **identify and manage security risks while protecting sensitive information.**

Provision-ISR is implementing ISO/IEC 27001 to strengthen our internal security practices and ensure information is managed securely through structured processes and continuous improvement.



AI-Powered Video Analysis: A New Era of Surveillance



Revolutionizing Security through Advanced Object Recognition and Metadata Management.

AI is revolutionizing the way surveillance systems operate. By harnessing its power, cameras can go beyond simple recording to provide intelligent insights and proactive security. From detecting anomalies and suspicious behaviors to optimizing resource allocation and gaining valuable insights, AI-powered video analysis empowers you to make informed decisions, enhance compliance, and gain a competitive edge.

Imagine a surveillance system that not only records footage but also actively identifies potential threats, alerts you to suspicious activities, and helps you optimize your operations. With AI-powered video analysis, this is no longer a futuristic concept but a reality. By leveraging the power of artificial intelligence, your surveillance system can become a strategic asset that helps you protect your assets, improve efficiency, and drive business success.

General Analytics

Basic but essential functions that provide foundational security features, like Camera Tampering and Motion Detection.



Motion Detection

Older CCTV systems use basic motion detection to trigger recording or alerts by detecting changes in the camera's view. However, this method often causes false alarms from minor movements



Camera Masking

Camera masking detection alerts you instantly when a camera is being blocked or covered by spray or objects, ensuring you're aware of any attempts to disable your security system.



Camera Offsetting

Camera offset detection notifies you immediately when a camera has been tampered with or shifted from its original position, ensuring your surveillance stays focused on the intended areas.

DDA1 (A.I. Human/ Vehicle Recognition)

Provision-ISR's DDA™ Video Analytics uses object recognition technology (and thus advanced artificial intelligence algorithms) to differentiate **between humans, two-wheeled, and four-wheeled vehicles**.

Thanks to this technology, the system will only trigger alarms or push notifications when the object of interest violates the pre-set rules. This **significantly reduces false alarms** caused by external factors like rain, shadows, changes in lighting, moving vegetation, or passing animals.



DDA1 Sterile Area

Keep the area safe with unauthorized access detection, alerts, and regulatory compliance.




DDA1 Line Crossing

Accurately detects human and vehicle intrusions, ensuring perimeter security.

DDA2 (A.I. Advanced Human / Vehicle Recognition)



DDA2 Human/ Vehicle Counting (Line)
Monitor customer flow with precision to manage store capacity, staffing, and peak times effectively.



DDA2 Human/ Vehicle Counting (Area)
Manage checkout lines efficiently by tracking queue lengths, improving customer satisfaction and staff deployment.



DDA2 Loitering Detection
Identifies loiterers, enabling prompt staff intervention to ensure children’s safety from threats.



DDA2 Illegal Parking Detection
Identifies and alerts about unauthorized parking in restricted zones or fire lanes, ensuring compliance and enhancing safety.

DDA2 (A.I. Advanced Human/ Vehicle Classification)

With the advanced artificial intelligence embedded in Provision-ISR cameras, we’ve eliminated false alarms by accurately identifying humans, two-wheeled and four-wheeled vehicles. Now, we take it a **step further with the second-generation DDA™ Video Analytics**. By having the ability to **show detailed metadata** analysis for each object type, we ensure unparalleled precision in surveillance, minimizing false alarms and enhancing security efficiency.

Second-generation DDA™ can analyze surveillance images more accurately. For example, this can improve the efficiency of forensic investigations by providing critical information for suspect identification and event reconstruction.



Metadata for 4-Wheeled
Brand (Mazda, Renault, Volkswagen, Etc.), Color, Model (Golf, Kangoo, Tucson, Etc.), Type (Car, SUV, Bus, Etc.), and Year.



Metadata for 2-Wheeled
Type (Bicycle, Electric Bicycle, Motorcycle, Tricycle).



Metadata for Humans
Age Estimation, Backpack, Gender, Glasses, Handbag, Hat, Mask, Lower and Upper Clothes Type & Color, Direction of Movement.

A.I. Face Detection and Recognition

This group focuses on functions related to facial detection and recognition, essential for security systems that require precise identification.



Face detection
Utilizes advanced facial recognition to quickly identify and locate individuals, enhancing security.



Face recognition
Boost security and manage staff effectively by using facial recognition for access control.


Special features

Include more unique features like License Plate Recognition (LPR), Parking Lot Management, Fire Detection, and Temperature Monitoring.



AI (Heatmap)

Analyzes movement patterns to optimize space layout and enhance the overall user experience.

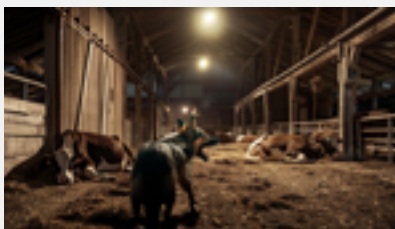


Audio Exception

Detects sudden changes in ambient sound, alerting in case of unexpected noises starting or stopping to ensure safety and asset protection.




LPR (License Plate Recognition)

Monitors license plates in surrounding areas, enhancing security and access control.

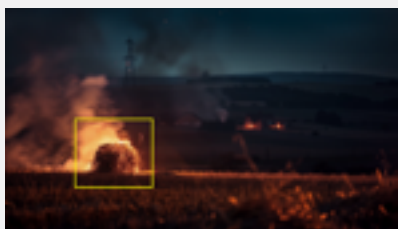


Fire Detection

Provides early fire detection to minimize potential damage to assets and infrastructure.

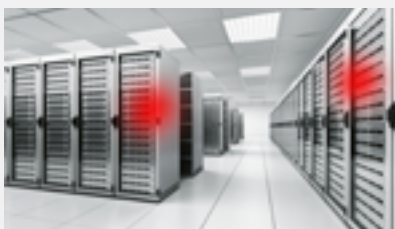

Temperature Monitoring

Measure, monitor, and control temperature for optimal performance and safety.

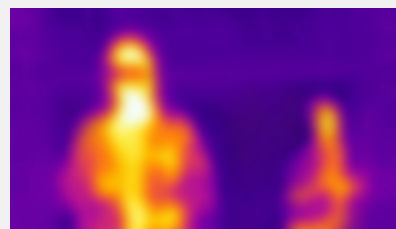

Thermal Imaging

Ensure the security and integrity of your materials with precise monitoring and control.



See the analytic in action

Scan & Watch





Vertical Markets


Location: Website > Knowledge > **Vertical Markets**

Access **industry-focused leaflets** designed to support sales. From retail to logistics, each one **highlights the ideal products and AI technologies** for the job. Add your **company and contact info**, then use them in pitches, quotes, or meetings. **Real solutions for real impact.**



Ossia O.S.

Simple and Intuitive Operating System by Provision-ISR.

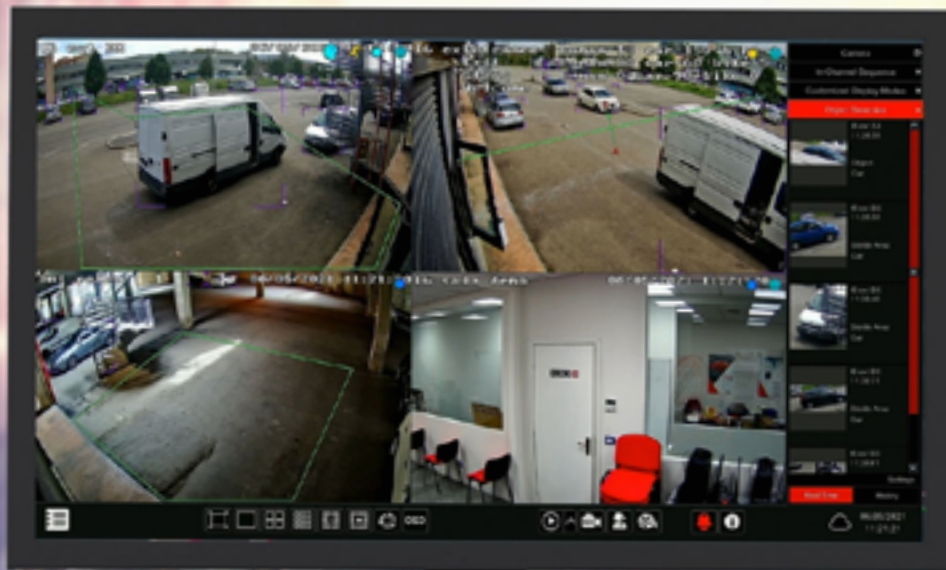

Ossia is the latest OS for Provision-ISR's DVR/NVR systems, it is one of the most innovative operating system in the market. As the heart of your system it's present rich and advance features, answering all your surveillance needs.

Applications



Private houses




Small/medium business




Buildings

Key Features

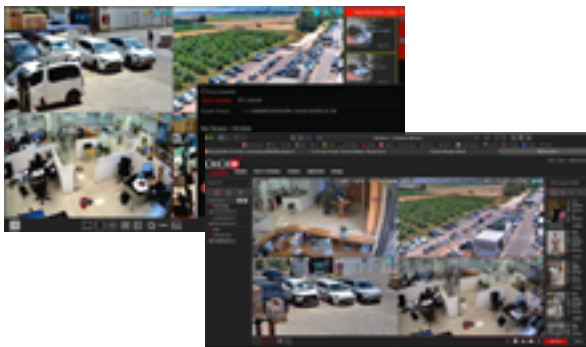


Cloud Access & Remote Management

Access the full Ossia OS interface from anywhere through provisionr-cloud.com — available remotely without any compromise on functionality. Keep your system effortlessly up to date with cloud-based firmware updates, scheduled and delivered on your terms.

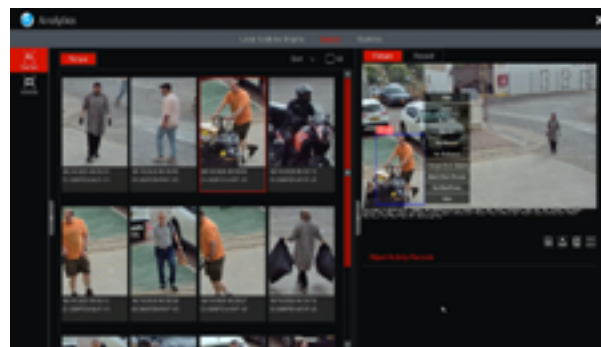


Analytics Dedicated Interface

Search and backup based on object attributes, including Humans, Vehicles, License plates, and Human Faces.

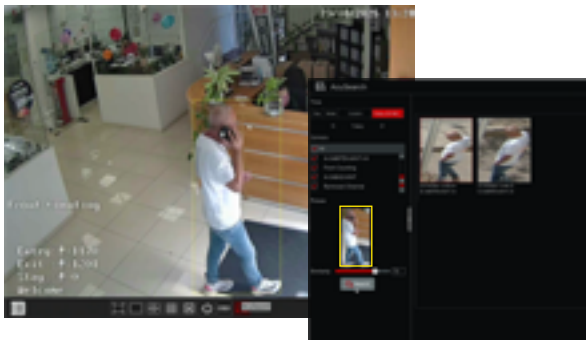


DDA Analytic Search

Instantly locate a person across all connected cameras. Select any individual from live or recorded footage and the NVR's AI searches your entire system for matching appearances automatically. No descriptions needed.

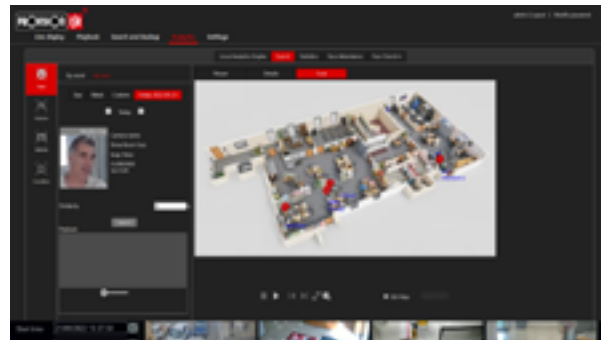


Over-Map Face Track

Upload a map, and track a chosen face over it.

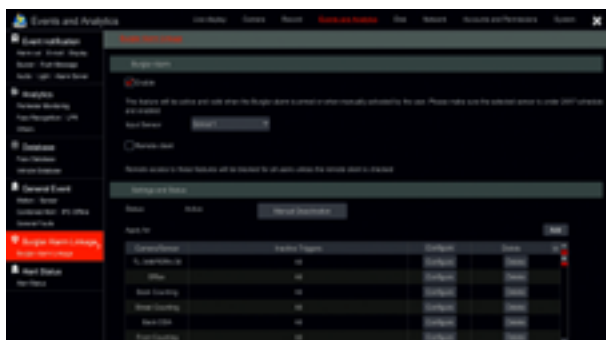

Burglar Alarm

CCTV and alarm systems are now seamlessly connected! Control system triggers like recording, push notifications, sirens, and more using the arm/disarm function on any burglar system

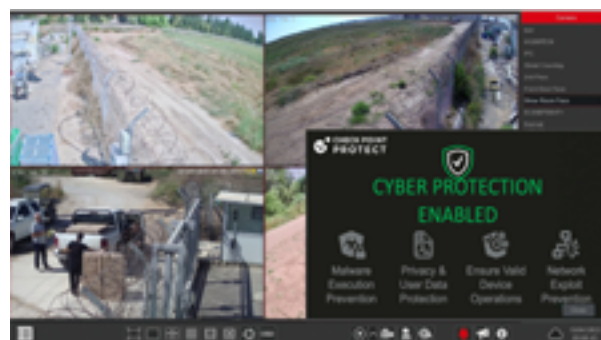

Security At Highest Priority

Protect IP-connected CCTV systems from cyber attacks with Check Point's IoT Protect Nano Agent, ensuring real-time protection and built-in firmware security for Provision-ISR devices.

Ossia O.S. Key Features



Batch Playback Handling

Multiple channels playback, backup, or delete in a single click.




In Channel Appearance

Easily choose what data is visible on the channel, along with objects, faces, plates, and more.



Statistics Variations

Choose the time - and get instant traffic statistics for humans and vehicles which occurred at that specific time.

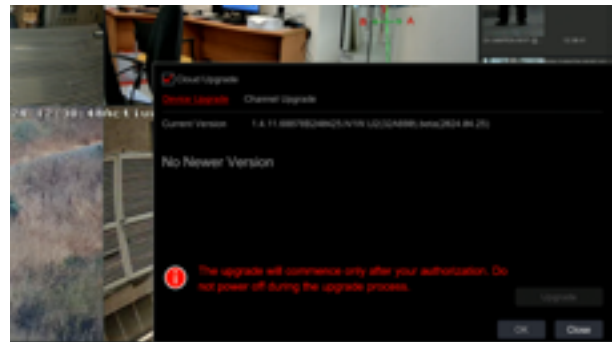

Device Cloud Updates

Stay effortlessly up to date with our innovative cloud update feature!



Intuitive operations

Audio broadcast, immediate alarm/relay activation, instant playback, and many more at a click of a button.



Parking Lot Management

Parking lot management feature offers seamless monitoring, license plate recognition, and efficient space utilization, ensuring enhanced security and operational efficiency for parking facilities.

VMS - Video Management Software

Intelligent web-client video management platform



Ossia VMS is an advanced and reliable Video Management Software specifically designed for CCTV systems featuring multiple devices controlled from a Single reliable platform. Centralized monitoring across bank branches, campus facilities, chain stores, or industrial complexes - provides operators with at-a-glance verification of incidents and management of multiple cameras through real-time floor plans and intelligent mapping features. The Ossia VMS solution provides a flexible operational approach for operators and manned guarding teams. The platform enables a rapid and decisive response to any incident with its unique and tailored features.

Standard version



Ossia VMS STANDARD VERSION supports up to 256 channels and is 100% License Free.



Enterprise version

Ossia VMS ENTERPRISE VERSION supports up to 10,000 channels and is a license-based platform.

Vertical markets



Shopping centers



Governments institutes



Industry

Ossia VMS Key Features




Main interface - live view

Complete live view control, including Fish-Eye views, PTZ Control, Instant Playback, Audio broadcast, Manual alarm activation, and many more.



Main interface - playback view

View playback from the recorder/storage server, back up multiple cameras at once and combine a face/license plate for your search.

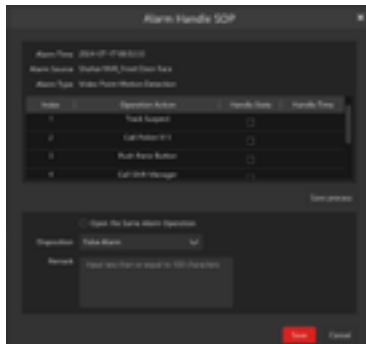


SOP - Standard Operating Procedure

Predefined actions to be followed by the operator based on specific events.



E-Map Live Monitoring & Face Tracking

Integrate Google Maps or custom maps for real-time event locations during live E-Map monitoring. Use VMS to search faces across devices and track movements within your custom E-Map.

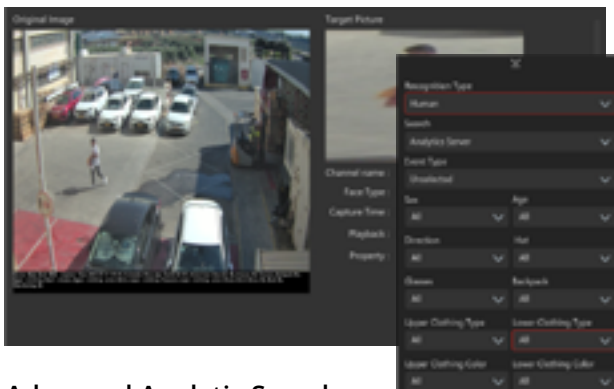

Advanced Analytic Search

Use the VMS to search for faces across multiple devices and follow a face path over the E-map you have created.



Customized dashboard


Build your data dashboard with the displays of your choice out of the wide variety of the VMS features, such as analytics, videos, maps, playbacks, etc.

Ossia VMS Key Features




Decoding by dedicated HW

Create a custom video wall canvas with our TV Wall. Drag & drop live feeds, playback, and alarms for up to 144 channels. Each window is flexible - monitor live, review past events, or display alerts. Get unmatched situational awareness, your way.

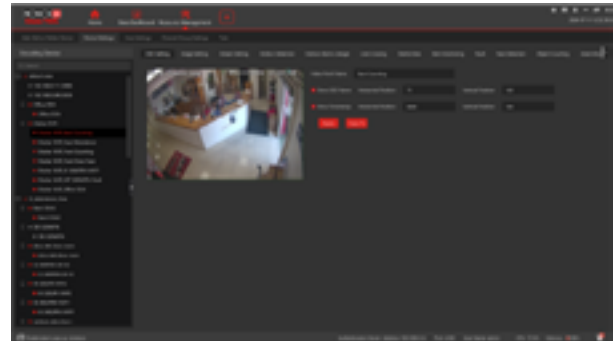


Remote settings

Set your devices straight from the VMS, starting from the most basic motion detection to the more advanced features such as DDA analytics and face detection.

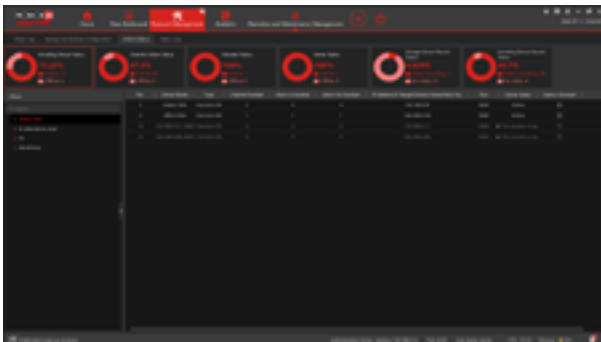

System health monitor

The system health monitor allows the user to see the system and connected devices' status visually. It shows connectivity, alarm status, number of channels, and more. The user can even connect directly to his device's web client.

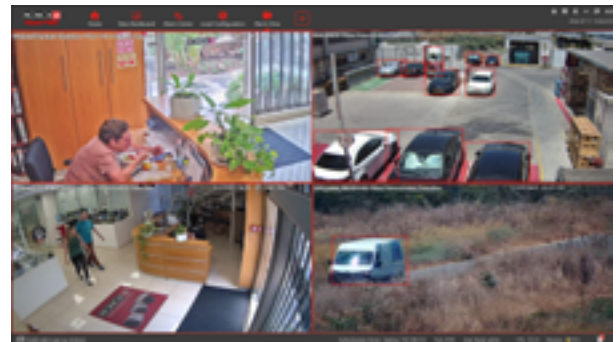


Alarm view

Choose which events will pop up on your monitor, including the specific event details.



LPR monitoring


Got a parking lot you need to manage? Now you can! The LPR monitoring can be used to fully manage a parking lot, including receiving entrance/exit statistics.

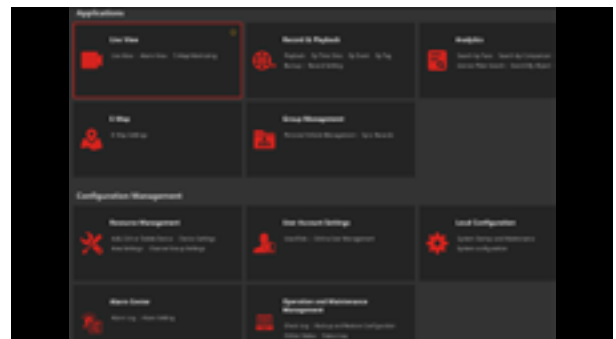

Management Mode


Focus on Management, Not Monitoring: Optimize your VMS with streamlined device management, face and license plate databases, and connections for up to 10,000 devices. Minimize server load with a 16-channel live view limit to reduce hardware costs and boost efficiency.

Ossia VMS Key Features

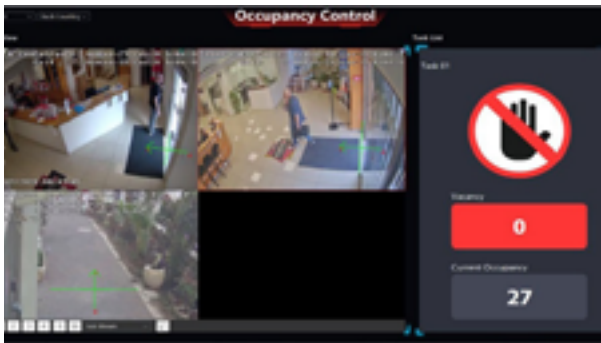


Object counting and occupancy control

Ossia VMS uses counting cameras for real-time occupancy data, managing flow with entry limits and customizable tasks. It offers triggers and real-time data, comparing statistics, and visualizing traffic in graphs and tables.

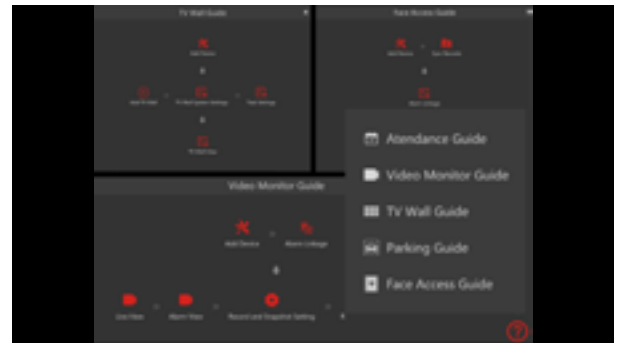


Interactive Help Guides

Use the Interactive Help Guide for easy setup. Its flow chart simplifies configuring popular modules like video monitoring and TV wall setups.

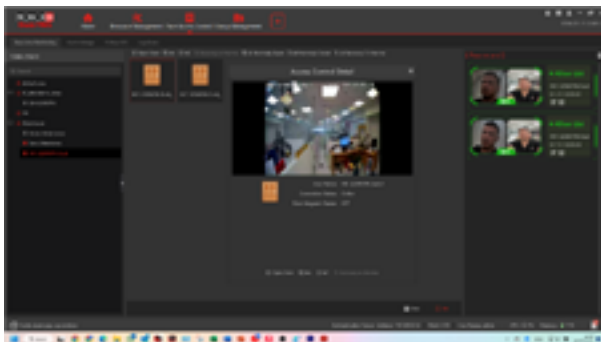


Access Control Function

Our access control module supports real-time monitoring, displays door statuses, and enables one-click operations. Use E-Map Live Monitoring to map access devices for live operations and view alarm information.

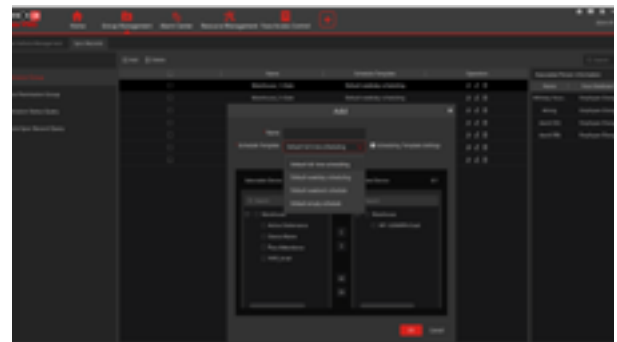


People Group Management

Effortlessly manage permission groups with schedules and triggers. Sync database groups from Ossia VMS to intercom, NVRs, and IPCs for efficient access management.

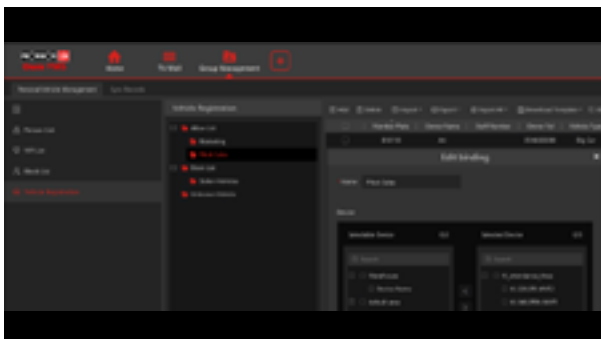

Vehicle Group Management

Direct synchronization of license plates with LPR devices ensures continuous operation, even during connection losses. From one central location, our VMS now lets you categorize license plates into groups and push these groups to different NVRs and LPR IPCs seamlessly.

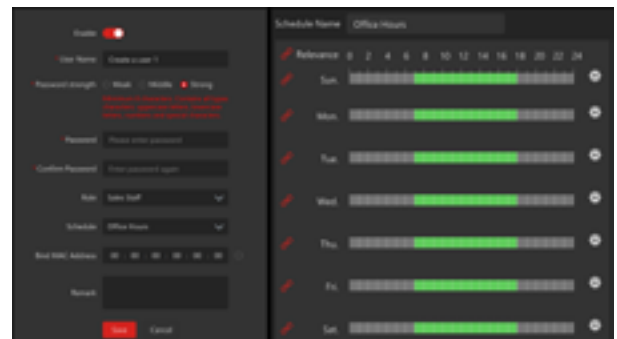

VMS User Scheduled Access

This feature ensures security for shift workers and multi-staffed monitoring stations. Set precise schedules, camera access, and permissions to prevent unauthorized entry. Denied access for users outside designated schedules enhances control and security.

Provision CAM 2 Mobile APP

The App you always dreamt of is in the pocket of your jeans.



Provision Cam2 is the installers' first choice for their professional needs, yet clear-cut to be the end-users favorite App for everyday surveillance.

Provision Cam2 is a free iOS and Android App.

Key Features



AI-based playback



Face database management



Sharing



LPR search



Fish-Eye support



QR code sharing



Talk and listen capabilities



Account based

Provision Cam2 Key Features



DDA analytics search

Search events by specific analytics and object attributes for precise, time-saving efficiency.



Simple Playback Filtering

Easily search and find specific event playbacks!



Personalised Live View

Customise live view with preferred layouts, mixed channels, and cameras from multiple NVRs in one view.




Instant Video Sharing

Share video playbacks instantly with anyone via your preferred messaging app or social media platform with a single tap



Remote Device Control

Access all the features you can do locally on your recording device from the App



Face recognition

Capture faces directly and keep your face database!




Real-Time Event Alerts

Stay on top of every event and firmware update with instant push notifications.



DDA Analytics Configuration

Set up AI analytics zones in-app: draw areas, adjust settings, and configure DDA rules remotely.



Johnson Control Integration

Control DSC or Visonic alarms through CAM 2 app, and link zones with cameras for visual verification.

IP Series



2MP - 4MP

Our B-Sight series provide you with everything you need for a Basic installation. B-Sight cameras guarantee a **superior image quality, improved night performance** and make an **outstanding value for money** solution.





2MP - 4MP - 6MP - 8MP

A reliable solution for any installation, big or small. With **sharp image quality**, powerful night vision, and **Hybrid Light Technology**, this series offers **outstanding value for money**. It includes **AI-based DDA1™ video analytics** and top-level **cyber protection** powered by Check Point.





2MP - 4MP - 6MP - 8MP - 12MP

Designed for professionals, it delivers **exceptional image quality, DDA2™ video analytics** with AI-based detection of people and vehicles, along with features such as **face detection** and **metadata extraction** (like clothing and vehicle attributes). With **I/O control** and **cyber protection** by Check Point, it's smart, powerful, and precise.





2MP - 4MP - 8MP

Built for **large-scale surveillance**, Provision-ISR's PTZ cameras offer powerful zoom, full-area coverage, and **auto-tracking of people and vehicles**. With **smart detection** and **face recognition capabilities**, they help monitor wide areas and respond in real-time to critical events.



Analytics Table

		B-Sight Cameras	S-Sight Cameras	Eye-Sight Cameras	Smart-Sight Cameras	NVR	S-Sight PTZ	Eye-Sight PTZ
								
General Analytics	Camera Masking	✓	✓	✓	✓		✓	✓
	Camera Offsetting	✓	✓	✓	✓		✓	✓
DDA1 (A.I. Human/ Vehicle Recognition)	Sterile Area	✓ (4) *	✓ (4)	✓ (4)	✓ (4)	✓ (2)	✓ (4)	✓ (4)
	Line Crossing	✓ (4) *	✓ (4)	✓ (4)	✓ (4)	✓ (2)	✓ (4)	✓ (4)
DDA2 (A.I. Advanced Human/ Vehicle Recognition)	Object Counting (Line)			✓ (1)	✓ (1)			✓
	Object Counting (Area)			✓ (1)	✓ (1)			
	Loitering Detection			✓ (4)	✓ (4)			
	Illegal Parking Detection			✓ (4)	✓ (4)			
	Metadata for Cars / Humans			✓ (4)				
A.i Face Detection and Recognition	Face detection			✓ (1)	✓ (1)	✓		✓
	Face recognition				✓ (1)	✓		
Special features	AI (Heatmap)			✓ (1)	✓ (1)			
	Audio Exception			✓ (1)	✓ (1)			
	LPR (License Plate Recognition)				✓			
	Small Parking Lot management					✓		
	Fire Detection				✓ (1)			
	Temperature analysis				✓ (10)			
	Thermal analysis				✓ (4)			
	Combined Analytics					✓		
	Object Smart Tracking						✓	✓
CHECK POINT EMBEDDED	Check Point Cyber Protection		✓	✓	✓	✓		
NDA Compliance	NDA Compliance	✓	✓	✓	✓	✓	✓	✓

✓ - Available () - How many areas / lines * - Human only

IP Cameras - Model Name Index

Housing

- D** = DOME
- DA** = DOME ANTI VANDAL
- DMA** = DOME MINI ANTI VANDAL
- BS** = BULLET SMALL
- BM** = BULLET MEDIUM
- BL** = BULLET LARGE
- I** = GENERAL BULLET
- DPAN** = PANORAMIC DOME
- BPAN** = PANORAMIC BULLET
- FE** = FISH-EYE

Lighting

- I** = IR **2** = 20m IR **8** = 80m IR
- V** = VISIBLE **4** = 40m IR
- H** = HYBRID **6** = 60m IR

Sensor

- 2** = 1/2"
- 3** = 1/3"

NDA Compliance



Housing Color

- G** = Grey
- B** = Black

Resolution

2MP

4MP

5MP

6MP

8MP

12MP

LUX

- 0** = Total Darkness

Solution

- IPB** = B-Sight
- IPS** = S-Sight
- IPE** = Eye-Sight
- IPX** = Pro
- LPR** = LPR
- THERMAL** = THERMAL
- AD** = Active Deterrence
- WIPS** = WiFi S-Sight
- SR** = S-Sight Rainbow
- SR3** = Rainbow 3.0

Lens

- 28** = 2.8mm
- 36** = 3.6mm
- VF** = Vari Focal 2.8-12mm
- MVF** = Motorized 2.8-12mm
- MVF2** = Motorized 7-22mm

Country of Origin

- VN** = Vietnam

Model Name: DH-320IPSN-28-G-VN

< 17

18 >

Rainbow 3.0

When Night Looks Like Day

rainbow 3.0



When Night Looks Like Day

rainbow 3.0 redefines how cameras see in the dark.

By combining advanced optics, a high-sensitivity sensor, and intelligent image processing, it captures natural, vivid color even when light is almost gone.

Every detail stays clear and true, turning night into a brighter, more reliable field of vision.


The Power Behind the Color

All working together to bring true color to the night.




F1.0 Lens

Captures twice the light for brighter, sharper nighttime images.

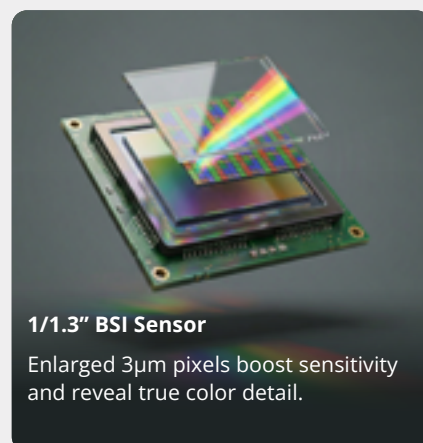


1/1.3" BSI Sensor

Enlarged 3µm pixels boost sensitivity and reveal true color detail.

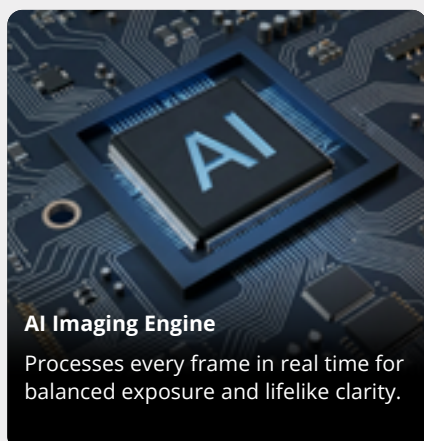

AI Imaging Engine

Processes every frame in real time for balanced exposure and lifelike clarity.

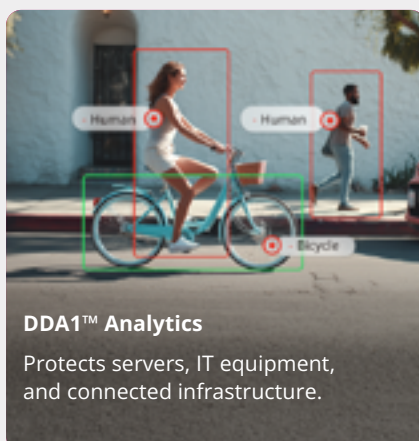

DDA1™ Analytics

Protects servers, IT equipment, and connected infrastructure.




Check Point Cybersecurity & NDA Compliance

Embedded protection against cyber threats, with certified NDA-approved components.


Where Light Meets Reality

Real-world performance for every environment

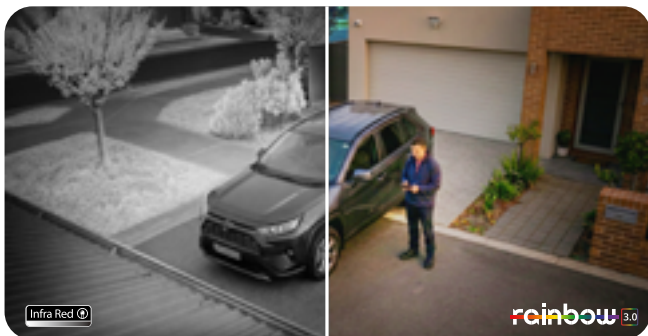

Residential Security

Identify people and vehicles clearly, even in low light.

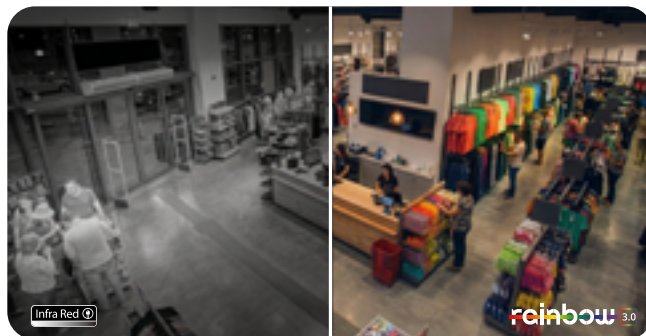

Retail & Commercial

Capture vivid color and detail to monitor customer flow and activity.



Perimeter Monitoring

Detect and track movement across large or unlit outdoor areas.



Public Spaces

Maintain clear, reliable visibility for safety, traffic, and crowd control.

Key Specifications




4MP Resolution



Digital WDR



IP67 waterproof



PoE



Full-Color 24/7



DDA Analytics



SD card Support (512GB)



White LED Illumination



Cyber security



Dual System



Built-in Microphone



NDAA

Because every detail deserves to be seen.

PTZ Cameras - Model Name Index

Housing

MZ = Mini PTZ
ZE/ZP = PTZ Eco/Pro (Analog)
Z1 = PTZ 1"
Z3 = PTZ 3"
Z4 = PTZ 4"
Z5 = PTZ 5"
Z7 = PTZ 7"
Z8 = PTZ 8"

Optical Lens

3 = x3
4 = x4
10 = x10
20 = x20
25 = x25
37 = x37
50 = x50

NDA Compliance



Illumination

IR = INFRA RED
LS = LASER

Z5-25IPEN-4(IR)

Solution

IPM = IP MStar
IPS = IP S-Sight
IPE = IP Eye-Sight
ADS = Active Deterrence S-Sight
A = Analog

Resolution

2MP

4MP

8MP

Got a camera?
We've got your bracket.



Download your
Bracket matching System

The Next Standard in Security



Ask your local distributor about availability.

Look for the “Made in Vietnam” logo on the product packaging.



B-Sight

Hybrid LED, DWDR, IP67, PoE, General Analytics: Camera Tampering, DDA™ AI Analytics (Human Recognition): Line Crossing, Sterile Area

DH-320IPBN-28 2MP	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone	Alarm:	No	DDA<i>AI</i> ANALYTICS Hybrid FACEIT NDAA FIXED LENS ONVIF	
Lens:	2.8mm (93°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone										
Alarm:	No										
BSH-320IPBN-28 2MP	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone	Alarm:	No	DDA<i>AI</i> ANALYTICS Hybrid FACEIT NDAA FIXED LENS ONVIF	
Lens:	2.8mm (93°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone										
Alarm:	No										
DH-340IPBN-28 4MP	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone	Alarm:	No	DDA<i>AI</i> ANALYTICS Hybrid FACEIT NDAA FIXED LENS ONVIF	
Lens:	2.8mm (93°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone										
Alarm:	No										
BSH-340IPBN-28 4MP	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone	Alarm:	No	DDA<i>AI</i> ANALYTICS Hybrid FACEIT NDAA FIXED LENS ONVIF	
Lens:	2.8mm (93°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone										
Alarm:	No										



S-Sight

Hybrid LED, True WDR, IP67, SD Card, PoE, General Analytics: Camera Tampering, DDA™ AI Analytics (Human, 2-wheels, 4-wheels Recognition): Line Crossing, Sterile Area

DH-320IPSN-28 2MP 	<table><tr><td>Lens:</td><td>2.8mm (104°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (104°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	     	
Lens:	2.8mm (104°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										

DH-320IPSN-28-G 2MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (104°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (104°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA<i>T</i> ANALYTICS Hybrid FACE<i>IT</i> NDAA FIXED LENS ONVIF	
Lens:	2.8mm (104°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-320IPSN-VF 2MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm VF (102°-33°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm VF (102°-33°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA<i>T</i> ANALYTICS Hybrid FACE<i>IT</i> NDAA FIXED LENS ONVIF	
Lens:	2.8-12mm VF (102°-33°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
BSH-320IPSN-28 2MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (105°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (105°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA<i>T</i> ANALYTICS Hybrid FACE<i>IT</i> NDAA FIXED LENS ONVIF	
Lens:	2.8mm (105°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
BSH-320IPSN-28-G 2MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (105°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (105°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA<i>T</i> ANALYTICS Hybrid FACE<i>IT</i> NDAA FIXED LENS ONVIF	
Lens:	2.8mm (105°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
BMH-320IPSN-VF 2MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm VF (102°-33°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm VF (102°-33°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA<i>T</i> ANALYTICS Hybrid FACE<i>IT</i> NDAA FIXED LENS ONVIF	
Lens:	2.8-12mm VF (102°-33°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										



Wi-Fi in 

Intruders out.



Curious?
Scan for more




BSH-340WIPSN-28


CHECK POINT EMBEDDED Wi-Fi DDA*T* GENERATION

IV-320IPSN-37 2MP 	<table><tr><td>Lens:</td><td>3.7mm (81°)</td></tr><tr><td>Illumination:</td><td>10m (20 invisible IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	3.7mm (81°)	Illumination:	10m (20 invisible IR LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	3.7mm (81°)										
Illumination:	10m (20 invisible IR LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DAH-340IPSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (2 High-Power IR LED) 20m (2 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (2 High-Power IR LED) 20m (2 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8mm (93°)										
Illumination:	20m (2 High-Power IR LED) 20m (2 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DAI-340IPSN-MVF 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (89-31°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (89-31°)	Illumination:	40m (3 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8-12mm MVF with Auto Focus (89-31°)										
Illumination:	40m (3 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-340IPSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8mm (93°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-340ADSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (94°)</td></tr><tr><td>Illumination:</td><td>30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (94°)	Illumination:	30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	No	  	
Lens:	2.8mm (94°)										
Illumination:	30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights										
Audio:	Built-in Microphone and Speaker + Audio Input / Output										
Alarm:	No										
DH-340ADSN-28-G 4MP 	<table><tr><td>Lens:</td><td>2.8mm (94°)</td></tr><tr><td>Illumination:</td><td>30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (94°)	Illumination:	30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	No	  	
Lens:	2.8mm (94°)										
Illumination:	30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights										
Audio:	Built-in Microphone and Speaker + Audio Input / Output										
Alarm:	No										
DH-340IPSN-28-B 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8mm (93°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										

DH-340IPSN-28-G 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8mm (93°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-340IPSN-MVF 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (89-31°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (89-31°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8-12mm MVF with Auto Focus (89-31°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-340IPSN-MVF-B 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (89-31°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (89-31°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8-12mm MVF with Auto Focus (89-31°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-340IPSN-MVF-G 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (89-31°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (89-31°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8-12mm MVF with Auto Focus (89-31°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DV-340SRN-28 4MP	<table><tr><td>Lens:</td><td>2.8mm (99°)</td></tr><tr><td>Illumination:</td><td>25m (2 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (99°)	Illumination:	25m (2 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	  	
Lens:	2.8mm (99°)										
Illumination:	25m (2 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										

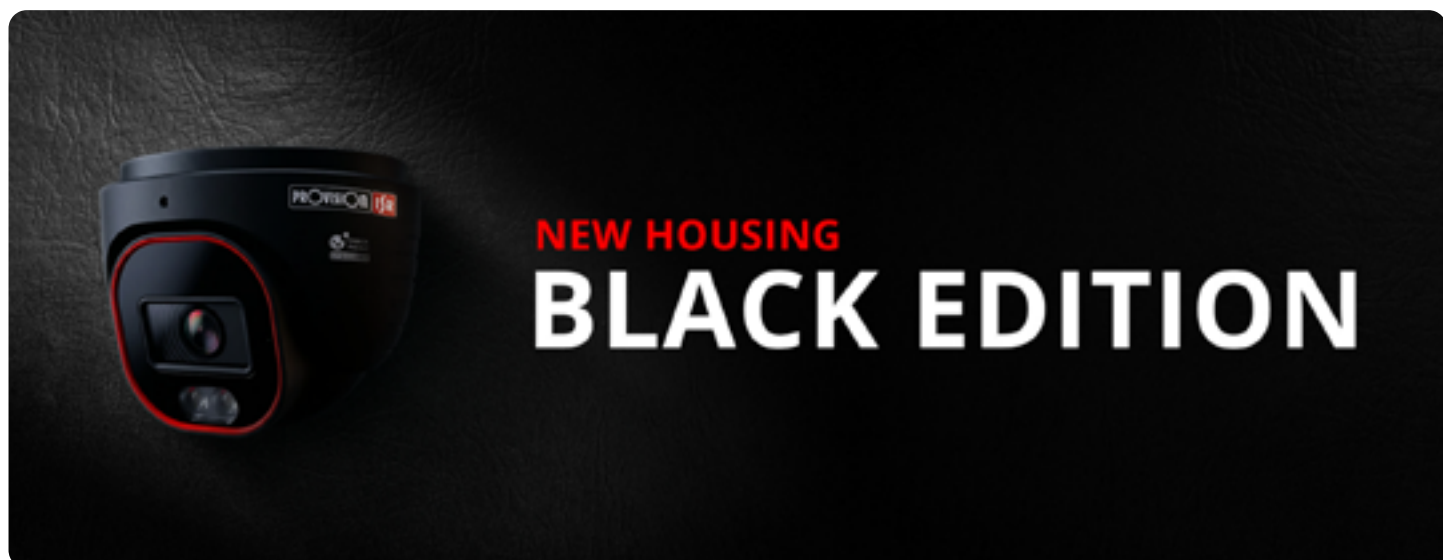

DH-340SRN-MVF 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (105.4°-34°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED) 40m (2 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (105.4°-34°)	Illumination:	40m (1 High-Power IR LED) 40m (2 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA7 ANALYTICS   NDAA   
Lens:	2.8-12mm MVF with Auto Focus (105.4°-34°)									
Illumination:	40m (1 High-Power IR LED) 40m (2 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
DV-340SR3N-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (99°)</td></tr><tr><td>Illumination:</td><td>10m (2 High-Power White LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (99°)	Illumination:	10m (2 High-Power White LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA7 ANALYTICS   NDAA   
Lens:	2.8mm (99°)									
Illumination:	10m (2 High-Power White LEDs)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
DV-340SR3N-MVF 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (100°- 33°)</td></tr><tr><td>Illumination:</td><td>20m (3 High-Power White LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (100°- 33°)	Illumination:	20m (3 High-Power White LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA7 ANALYTICS   NDAA   
Lens:	2.8-12mm MVF with Auto Focus (100°- 33°)									
Illumination:	20m (3 High-Power White LEDs)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
DM-340WIPSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (110°)</td></tr><tr><td>Illumination:</td><td>10m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (110°)	Illumination:	10m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA7 ANALYTICS   NDAA   
Lens:	2.8mm (110°)									
Illumination:	10m (2 High-Power IR LEDs)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BSH-340IPSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA7 ANALYTICS   NDAA   
Lens:	2.8mm (93°)									
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BSH-340IPSN-28-G 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA7 ANALYTICS   NDAA   
Lens:	2.8mm (93°)									
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BSH-340WIPSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (110°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (110°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA7 ANALYTICS   NDAA   
Lens:	2.8mm (110°)									
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									


BMH-340IPSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (94°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (94°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	2.8mm (94°)									
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BMH-340IPSN-MVF 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (89-31°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (89-31°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	2.8-12mm MVF with Auto Focus (89-31°)									
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BMH-340ADSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (94°)</td></tr><tr><td>Illumination:</td><td>30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (94°)	Illumination:	30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	No	   
Lens:	2.8mm (94°)									
Illumination:	30m (1 High-Power IR LED) 30m (1 High-Power White LEDs) Red/Blue Strobe Lights									
Audio:	Built-in Microphone and Speaker + Audio Input / Output									
Alarm:	No									
BSV-340SRN-36 4MP 	<table><tr><td>Lens:</td><td>3.6mm (79°)</td></tr><tr><td>Illumination:</td><td>25m (2 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	3.6mm (79°)	Illumination:	25m (2 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	3.6mm (79°)									
Illumination:	25m (2 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BSV-340SR3N-36 4MP 	<table><tr><td>Lens:</td><td>3.6mm (81°)</td></tr><tr><td>Illumination:</td><td>10m (2 High-Power White LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	3.6mm (81°)	Illumination:	10m (2 High-Power White LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	3.6mm (81°)									
Illumination:	10m (2 High-Power White LEDs)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									



rainbow 3.0

When Night Looks Like Day

Full-Color Night Vision




Curious? Scan for more



BMV-340SRN-36 4MP 	<table><tr><td>Lens:</td><td>3.6mm (79°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power White LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	3.6mm (79°)	Illumination:	40m (3 High-Power White LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	3.6mm (79°)									
Illumination:	40m (3 High-Power White LEDs)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BMV-340SR3N-36 4MP 	<table><tr><td>Lens:</td><td>3.6mm (81°)</td></tr><tr><td>Illumination:</td><td>20m (3 High-Power White LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	3.6mm (81°)	Illumination:	20m (3 High-Power White LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	3.6mm (81°)									
Illumination:	20m (3 High-Power White LEDs)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BMV-340SR3N-MVF 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (100°- 33°)</td></tr><tr><td>Illumination:</td><td>20m (3 High-Power White LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (100°- 33°)	Illumination:	20m (3 High-Power White LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	2.8-12mm MVF with Auto Focus (100°- 33°)									
Illumination:	20m (3 High-Power White LEDs)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
DMA-340IPSN-28 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>10m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	10m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	2.8mm (93°)									
Illumination:	10m (2 High-Power IR LEDs)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
DH-360IPSN-28 6MP 	<table><tr><td>Lens:</td><td>2.8mm (103°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (103°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	2.8mm (103°)									
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
DH-360IPSN-MVF 6MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (108-35°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (108-35°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	2.8-12mm MVF with Auto Focus (108-35°)									
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									
BMH-360IPSN-MVF 6MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (108°-35°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (108°-35°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	   
Lens:	2.8-12mm MVF with Auto Focus (108°-35°)									
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)									
Audio:	Built-in Microphone + Audio input									
Alarm:	No									

DMA-380IPSN-28 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (103°)</td></tr><tr><td>Illumination:</td><td>10m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (103°)	Illumination:	10m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Intelligent IR FACE3 NDAA FIXED LENS ONVIF 0000	
Lens:	2.8mm (103°)										
Illumination:	10m (2 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DAI-380IPSN-MVF 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (96°-33°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (96°-33°)	Illumination:	40m (3 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Intelligent IR FACE3 NDAA MOTORIZED LENS ONVIF 0000	
Lens:	2.8-12mm MVF with Auto Focus (96°-33°)										
Illumination:	40m (3 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-380IPSN-28 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (103°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (103°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Hybrid IR FACE3 NDAA FIXED LENS ONVIF 0000	
Lens:	2.8mm (103°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-380IPSN-28-B 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (103°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (103°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Hybrid IR FACE3 NDAA FIXED LENS ONVIF 0000	
Lens:	2.8mm (103°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-380IPSN-28-G 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (103°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (103°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Hybrid IR FACE3 NDAA FIXED LENS ONVIF 0000	
Lens:	2.8mm (103°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										

Got a camera?
We've got your bracket.



Download your
Bracket Matching System



DH-380ADSN-28 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (103°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (103°)	Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	No	DDA ANALYTICS Hybrid Active NDAA FIXED LENS CITYVIEW 0000	
Lens:	2.8mm (103°)										
Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights										
Audio:	Built-in Microphone and Speaker + Audio Input / Output										
Alarm:	No										
DH-380IPSN-MVF 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (96°-33°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (96°-33°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Hybrid FACE360 NDAA MOTORIZED LENS CITYVIEW 0000	
Lens:	2.8-12mm MVF with Auto Focus (96°-33°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-380IPSN-MVF-B 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (96°-33°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (96°-33°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Hybrid FACE360 NDAA MOTORIZED LENS CITYVIEW 0000	
Lens:	2.8-12mm MVF with Auto Focus (96°-33°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DH-380ADSN-MVF 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (97°- 34°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (97°- 34°)	Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	No	DDA ANALYTICS Hybrid Active NDAA MOTORIZED LENS CITYVIEW 0000	
Lens:	2.8-12mm MVF with Auto Focus (97°- 34°)										
Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights										
Audio:	Built-in Microphone and Speaker + Audio Input / Output										
Alarm:	No										
DH-380IPSN-MVF-G 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (96°-33°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (96°-33°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Hybrid FACE360 NDAA MOTORIZED LENS CITYVIEW 0000	
Lens:	2.8-12mm MVF with Auto Focus (96°-33°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
BMH-380IPSN-28 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (104°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (104°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Hybrid FACE360 NDAA FIXED LENS CITYVIEW 0000	
Lens:	2.8mm (104°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
BMH-380IPSN-MVF 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (96°-33°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED) 30m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (96°-33°)	Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Hybrid FACE360 NDAA MOTORIZED LENS CITYVIEW 0000	
Lens:	2.8-12mm MVF with Auto Focus (96°-33°)										
Illumination:	40m (2 High-Power IR LED) 30m (1 High-Power White LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										

BMH-380ADSN-MVF 8MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (97°- 34°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (97°- 34°)	Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	No	   
Lens:	2.8-12mm MVF with Auto Focus (97°- 34°)									
Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights									
Audio:	Built-in Microphone and Speaker + Audio Input / Output									
Alarm:	No									
FEI-360IPN-V3 6MP 	<table><tr><td>Lens:</td><td>1.65mm (360° for Ceiling Mount / 180° For Wall Mount)</td></tr><tr><td>Illumination:</td><td>15m (4 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-In Microphone + Audio Input + Audio Output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	1.65mm (360° for Ceiling Mount / 180° For Wall Mount)	Illumination:	15m (4 High-Power IR LEDs)	Audio:	Built-In Microphone + Audio Input + Audio Output	Alarm:	Alarm in + Alarm out	   
Lens:	1.65mm (360° for Ceiling Mount / 180° For Wall Mount)									
Illumination:	15m (4 High-Power IR LEDs)									
Audio:	Built-In Microphone + Audio Input + Audio Output									
Alarm:	Alarm in + Alarm out									
FEI-2120IPN 12MP 	<table><tr><td>Lens:</td><td>1.65mm (360° for Ceiling Mount / 180° For Wall Mount)</td></tr><tr><td>Illumination:</td><td>15m (4 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-In Microphone + Audio Input + Audio Output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	1.65mm (360° for Ceiling Mount / 180° For Wall Mount)	Illumination:	15m (4 High-Power IR LEDs)	Audio:	Built-In Microphone + Audio Input + Audio Output	Alarm:	Alarm in + Alarm out	   
Lens:	1.65mm (360° for Ceiling Mount / 180° For Wall Mount)									
Illumination:	15m (4 High-Power IR LEDs)									
Audio:	Built-In Microphone + Audio Input + Audio Output									
Alarm:	Alarm in + Alarm out									




Eye-Sight

True WDR, IP67, SD Card, PoE, Analytics: Camera Tampering, DDA™ AI Analytics (Human, 2-wheels, 4-wheels Recognition): Line Crossing, Sterile Area, Object Counting (Line/Area), Loitering, Illegal Parking, Heatmap, Audio Exception, Face Detection, Advanced Object Classification


DAI-320IPEN-MVF-V4 2MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (106°-30°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (106°-30°)	Illumination:	40m (2 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	     	
Lens:	2.8-12mm MVF with Auto Focus (106°-30°)										
Illumination:	40m (2 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										

Smart Upgrades. Smarter Security.

New Features Available on Provision-ISR IP Camera's



BX-341IPEN 4MP 	<table><tr><td>Lens:</td><td>N/A</td></tr><tr><td>Illumination:</td><td>N/A</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>2Ch input, 2Ch output</td></tr></table>	Lens:	N/A	Illumination:	N/A	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	2Ch input, 2Ch output	      
Lens:	N/A									
Illumination:	N/A									
Audio:	Built-in Microphone + Audio input + Audio output									
Alarm:	2Ch input, 2Ch output									
DAI-340IPEN-28-V5 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>20m (2 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	20m (2 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	      
Lens:	2.8mm (93°)									
Illumination:	20m (2 High-Power IR LED)									
Audio:	Built-in Microphone + Audio input + Audio output									
Alarm:	Alarm in + Alarm out									
DAI-340IPEN-MVF-V5 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (98°-28°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (98°-28°)	Illumination:	40m (3 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	      
Lens:	2.8-12mm MVF with Auto Focus (98°-28°)									
Illumination:	40m (3 High-Power IR LEDs)									
Audio:	Built-in Microphone + Audio input + Audio output									
Alarm:	Alarm in + Alarm out									
DH-340ADN-MVF-V4 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (95°-32°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm Out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (95°-32°)	Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	Alarm in + Alarm Out	      
Lens:	2.8-12mm MVF with Auto Focus (95°-32°)									
Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights									
Audio:	Built-in Microphone and Speaker + Audio Input / Output									
Alarm:	Alarm in + Alarm Out									
DH-340ADN-MVF-G-V4 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (95°-32°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm Out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (95°-32°)	Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	Alarm in + Alarm Out	      
Lens:	2.8-12mm MVF with Auto Focus (95°-32°)									
Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights									
Audio:	Built-in Microphone and Speaker + Audio Input / Output									
Alarm:	Alarm in + Alarm Out									
DMA-340IPEN-28-V5 4MP 	<table><tr><td>Lens:</td><td>2.8mm (93°)</td></tr><tr><td>Illumination:</td><td>10m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm Out</td></tr></table>	Lens:	2.8mm (93°)	Illumination:	10m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm Out	      
Lens:	2.8mm (93°)									
Illumination:	10m (2 High-Power IR LEDs)									
Audio:	Built-in Microphone + Audio input + Audio output									
Alarm:	Alarm in + Alarm Out									
DI-340IPEN-28-V5 4MP 	<table><tr><td>Lens:</td><td>2.8mm (96°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (96°)	Illumination:	20m (1 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	No	      
Lens:	2.8mm (96°)									
Illumination:	20m (1 High-Power IR LED)									
Audio:	Built-in Microphone + Audio input + Audio output									
Alarm:	No									

DI-340IPEN-28-G-V5 4MP 	<table><tr><td>Lens:</td><td>2.8mm (96°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (96°)	Illumination:	20m (1 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	No	  	
Lens:	2.8mm (96°)										
Illumination:	20m (1 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	No										
DI-340IPEN-MVF-V5 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (100°-29°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (100°-29°)	Illumination:	40m (3 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	  	
Lens:	2.8-12mm MVF with Auto Focus (100°-29°)										
Illumination:	40m (3 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
DI-340IPEN-MVF-G-V4 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (100°-29°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (100°-29°)	Illumination:	40m (3 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	  	
Lens:	2.8-12mm MVF with Auto Focus (100°-29°)										
Illumination:	40m (3 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
I4-340IPEN-36-V5 4MP 	<table><tr><td>Lens:</td><td>3.6mm (79°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	3.6mm (79°)	Illumination:	40m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	  	
Lens:	3.6mm (79°)										
Illumination:	40m (2 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
I4-340IPEN-MVF-V5 4MP 	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (100°-29°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (100°-29°)	Illumination:	40m (2 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	  	
Lens:	2.8-12mm MVF with Auto Focus (100°-29°)										
Illumination:	40m (2 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										



The Next Standard in Security
Ask your local distributor about availability.
Look for the "Made in Vietnam" logo on the product packaging.

BMH-340ADN-MVF-V4 4MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (97-32°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights</td></tr><tr><td>Audio:</td><td>Built-in Microphone and Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm Out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (97-32°)	Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights	Audio:	Built-in Microphone and Speaker + Audio Input / Output	Alarm:	Alarm in + Alarm Out	DDA ANALYTICS Hybrid SD Active NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (97-32°)										
Illumination:	40m (1 High-Power IR LED) 40m (1 High-Power White LEDs) Red/Blue Strobe Lights										
Audio:	Built-in Microphone and Speaker + Audio Input / Output										
Alarm:	Alarm in + Alarm Out										
I6-340IPEN-MVF-V5 4MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (105°-33°)</td></tr><tr><td>Illumination:</td><td>60m (4 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (105°-33°)	Illumination:	60m (4 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red SD face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (105°-33°)										
Illumination:	60m (4 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
I6-340IPEN-MVF-G-V4 4MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (105°-33°)</td></tr><tr><td>Illumination:</td><td>60m (4 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (105°-33°)	Illumination:	60m (4 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red SD face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (105°-33°)										
Illumination:	60m (4 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
I8-340IPEN-MVF2-V5 4MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>7-22mm MVF with Auto Focus (43°-18°)</td></tr><tr><td>Illumination:</td><td>80m (2 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	7-22mm MVF with Auto Focus (43°-18°)	Illumination:	80m (2 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red SD face NDAA MOTORIZED LENS ONVIF	
Lens:	7-22mm MVF with Auto Focus (43°-18°)										
Illumination:	80m (2 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
DVS-IPEN-5 5MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td></td></tr><tr><td>Illumination:</td><td></td></tr><tr><td>Audio:</td><td>Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>8 Alarms In + 4 Alarms Out</td></tr></table>	Lens:		Illumination:		Audio:	Audio input + Audio output	Alarm:	8 Alarms In + 4 Alarms Out	DDA ANALYTICS IP camera face NDAA FIXED LENS ONVIF	
Lens:											
Illumination:											
Audio:	Audio input + Audio output										
Alarm:	8 Alarms In + 4 Alarms Out										
DI-360IPEN-28-V5 6MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (104°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8mm (104°)	Illumination:	20m (1 High-Power IR LED)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	No	DDA ANALYTICS Infra Red SD face NDAA FIXED LENS ONVIF	
Lens:	2.8mm (104°)										
Illumination:	20m (1 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	No										
DI-360IPEN-MVF-V5 6MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (112°-35°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (112°-35°)	Illumination:	40m (3 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red SD face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (112°-35°)										
Illumination:	40m (3 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										

DMA-360IPEN-28-V5 6MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (100°)</td></tr><tr><td>Illumination:</td><td>20m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8mm (100°)	Illumination:	20m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 80 face NDAA FIXED LENS ONVIF	
Lens:	2.8mm (100°)										
Illumination:	20m (2 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
I4-360IPEN-36-V5 6MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>3.6mm (78°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	3.6mm (78°)	Illumination:	40m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 80 face NDAA FIXED LENS ONVIF	
Lens:	3.6mm (78°)										
Illumination:	40m (2 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
I4-360IPEN-MVF-V5 6MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (108°-35°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (108°-35°)	Illumination:	40m (3 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 80 face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (108°-35°)										
Illumination:	40m (3 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
I6-360IPEN-MVF-V5 6MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (106°-35°)</td></tr><tr><td>Illumination:</td><td>60m (4 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (106°-35°)	Illumination:	60m (4 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 80 face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (106°-35°)										
Illumination:	60m (4 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
DAI-380IPEN-MVF-V5 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (95°- 32°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (95°- 32°)	Illumination:	40m (3 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 80 face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (95°- 32°)										
Illumination:	40m (3 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										

Details matter.

High resolution meets high AI.








12MP

Scan & Watch



DMA-380IPEN-28-V3 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (103°)</td></tr><tr><td>Illumination:</td><td>10m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8mm (103°)	Illumination:	10m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 24 face NDAA FIXED LENS ONVIF	
Lens:	2.8mm (103°)										
Illumination:	10m (2 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
DI-380IPEN-MVF-V5 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (97°- 32°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (97°- 32°)	Illumination:	40m (2 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Infra Red 24 face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (97°- 32°)										
Illumination:	40m (2 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
DI-380IPEN-MVF-G-V5 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (97°- 32°)</td></tr><tr><td>Illumination:</td><td>40m (4 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input</td></tr><tr><td>Alarm:</td><td>No</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (97°- 32°)	Illumination:	40m (4 High-Power IR LED)	Audio:	Built-in Microphone + Audio input	Alarm:	No	DDA ANALYTICS Infra Red 24 face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (97°- 32°)										
Illumination:	40m (4 High-Power IR LED)										
Audio:	Built-in Microphone + Audio input										
Alarm:	No										
I6-380IPEN-MVF-V5 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (97°- 32°)</td></tr><tr><td>Illumination:</td><td>60m (4 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (97°- 32°)	Illumination:	60m (4 High-Power IR LED)	Audio:	Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 24 face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (97°- 32°)										
Illumination:	60m (4 High-Power IR LED)										
Audio:	Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
DAI-2120IPEN-MVF-V5 12MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (98°-47°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (98°-47°)	Illumination:	40m (3 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 24 face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (98°-47°)										
Illumination:	40m (3 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
I6-2120IPEN-MVF-V5 12MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8-12mm MVF with Auto Focus (98°-47°)</td></tr><tr><td>Illumination:</td><td>60m (4 High-Power IR LEDs)</td></tr><tr><td>Audio:</td><td>Built-in Microphone + Audio input + Audio output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8-12mm MVF with Auto Focus (98°-47°)	Illumination:	60m (4 High-Power IR LEDs)	Audio:	Built-in Microphone + Audio input + Audio output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Infra Red 24 face NDAA MOTORIZED LENS ONVIF	
Lens:	2.8-12mm MVF with Auto Focus (98°-47°)										
Illumination:	60m (4 High-Power IR LEDs)										
Audio:	Built-in Microphone + Audio input + Audio output										
Alarm:	Alarm in + Alarm out										
DPAN2-340ADRN 8MP CHECK POINT EMBEDDED	<table><tr><td>Lens:</td><td>2.8mm (180°) x2</td></tr><tr><td>Illumination:</td><td>30m (2 High-Power IR LEDs) 20m (2 High-Power White LEDs) Red/Blue Strobe Light</td></tr><tr><td>Audio:</td><td>2X Built-in Microphone + Built In Speaker + Audio Input / Output</td></tr><tr><td>Alarm:</td><td>Alarm in + Alarm out</td></tr></table>	Lens:	2.8mm (180°) x2	Illumination:	30m (2 High-Power IR LEDs) 20m (2 High-Power White LEDs) Red/Blue Strobe Light	Audio:	2X Built-in Microphone + Built In Speaker + Audio Input / Output	Alarm:	Alarm in + Alarm out	DDA ANALYTICS Hybrid 24 Active NDAA FIXED LENS ONVIF	
Lens:	2.8mm (180°) x2										
Illumination:	30m (2 High-Power IR LEDs) 20m (2 High-Power White LEDs) Red/Blue Strobe Light										
Audio:	2X Built-in Microphone + Built In Speaker + Audio Input / Output										
Alarm:	Alarm in + Alarm out										

BPAN2-340ADRN

8MP

CHECK POINT EMBEDDED

Lens:	2.8mm (180°) x2
Illumination:	30m (2 High-Power IR LEDs) 20m (2 High-Power White LEDs) Red/Blue Strobe Light
Audio:	2X Built-in Microphone + Built In Speaker + Audio Input / Output
Alarm:	Alarm in + Alarm out

DDA ANALYTICS

Thermal

Active

NDAA

FIXED LENS

ONVIF



Thermal

True WDR, IP66, SD Card, PoE, DDA™ AI Analytics (Optical): Line Crossing, Sterile Area, Area Entry, Area Exit, Object Counting (Line/Area), Loitering, Illegal Parking, Face Detection. DDA™ AI Analytics (Thermal): Line Crossing, Sterile Area, Area Entry, Area Exit

DH-THERMAL-3-V2

5MP

CHECK POINT EMBEDDED

Resolution:	
Lens:	Optical: 4mm (74°) Thermal: 3.2mm (53°)
Illumination:	20m (2 High-Power IR LED) White Strobe light
Optical e Thermal image overlay:	Black hot, White hot, Rainbow, iron oxide red, Lava Fusion image support
Audio:	Built-in MIC + Speaker + Audio input
Alarm:	Alarm in + Alarm out

DDA ANALYTICS

Thermal

face

NDAA



DH-THERMAL-7-V2

5MP

CHECK POINT EMBEDDED

Resolution:	
Lens:	Optical: 8mm (35°) Thermal: 7mm (25°)
Illumination:	20m (2 High-Power IR LED) White Strobe light
Optical e Thermal image overlay:	Black hot, White hot, Rainbow, iron oxide red, Lava Fusion image support
Audio:	Built-in MIC + Speaker + Audio input
Alarm:	Alarm in + Alarm out

DDA ANALYTICS

Thermal

face

NDAA



BMH-THERMAL-3-V2

5MP

CHECK POINT EMBEDDED

Resolution:	
Lens:	Optical: 4mm (74°) Thermal: 3.2mm (53°)
Illumination:	20m (2 High-Power IR LED) White Strobe light
Optical e Thermal image overlay:	Black hot, White hot, Rainbow, iron oxide red, Lava Fusion image support
Audio:	Built-in speaker + Audio input
Alarm:	Alarm in + Alarm out

DDA ANALYTICS

Thermal

face

NDAA





Thermal

Perimeter Protection

See what regular cameras can't - day or night.

Temperature Control

Monitor engine rooms, labs & more

Early Fire Detection

Catch threats before they ignite

Discover the Full Thermal Experience



BMH-THERMAL-7-V2  	Resolution: Lens: Optical: 8mm (35°) Thermal: 7mm (25°) Illumination: 20m (2 High-Power IR LED) White Strobe light Optical e Thermal image overlay: Black hot, White hot, Rainbow, iron oxide red, Lava Fusion image support Audio: Built-in speaker + Audio input Alarm: Alarm in + Alarm out	 	 	
BLH-THERMAL2-9-V2  	Resolution: Lens: Optical: 4mm (73°) Thermal: 9.1mm (48°) Illumination: 70m (2 High-Power IR LED) White Strobe light Optical e Thermal image overlay: Black Hot, White Hot, Rainbow, Iron Oxide Red Audio: Built-in speaker + Audio input Alarm: 4Ch Input, 4Ch Output	 	 	
BLH-THERMAL-19  	Resolution: Lens: Optical: 12mm (27°) Thermal: 19mm (20°) Illumination: 80m (2 High-Power IR LED) White Strobe light Optical e Thermal image overlay: Black Hot, White Hot, Rainbow, Iron Oxide Red, Lava Audio: Built-in speaker + Audio input Alarm: Alarm in + Alarm out	 	 	
BLH-THERMAL-25  	Resolution: Lens: Optical: 16mm (20°) Thermal: 25mm (15°) Illumination: 80m (2 High-Power IR LED) White Strobe light Optical e Thermal image overlay: Black Hot, White Hot, Rainbow, Iron Oxide Red, Lava Audio: Built-in speaker + Audio input Alarm: Alarm in + Alarm out	 	 	
BLH-THERMAL2-25-V2  	Resolution: Lens: Optical: 12mm (24°) Thermal: 25mm (18°) Illumination: 70m (2 High-Power IR LED) White Strobe light Optical e Thermal image overlay: Black Hot, White Hot, Rainbow, Iron Oxide Red Audio: Built-in speaker + Audio input Alarm: 4Ch Input, 4Ch Output	 	 	



LPR

True WDR, IP67, SD Card, PoE, Detection Speed 0-100km/h, Wiegand Support, General Analytics: Camera Tampering, License Plate Recognition with integrated vehicle Metadata

I6-220LPRN-MVF1  	Lens: 2.8-12mm MVF(110°-48°) Illumination: 60m (2 High-Power IR LEDs) Audio: Audio input + Audio output Alarm: Alarm in + Alarm out Recognition distance: 3~8m Plate database: LPR (database):10000 Plate Database	  	  	
--	---	---	---	---

I6-220LPRN-MVF2

2MP

CHECK POINT EMBEDDED

Lens:	8-32mm MVF(46°-16°)
Illumination:	80m (2 High-Power IR LEDs)
Audio:	Audio input + Audio output
Alarm:	Alarm in + Alarm out
Recognition distance:	16~48m
Plate database:	LPR (database):10000 Plate Database

ADVANCED ANALYTICS

Infra Red 940

LPR

NDAA

MOTORISED LENS

ONVIF



I6-240LPRN-MVF1

4MP

CHECK POINT EMBEDDED

Lens:	2.8-12mm MVF(110°-48°)
Illumination:	60m (4 High-Power IR LED)
Audio:	Audio input + Audio output
Alarm:	Alarm in + Alarm out
Recognition distance:	3~8m
Plate database:	LPR (database):10000 Plate Database

ADVANCED ANALYTICS

Infra Red 940

LPR

NDAA

MOTORISED LENS

ONVIF



I6-240LPRN-MVF2

4MP

CHECK POINT EMBEDDED

Lens:	8-32mm MVF(42°-16°)
Illumination:	60m (4 High-Power IR LED)
Audio:	Audio input + Audio output
Alarm:	Alarm in + Alarm out
Recognition distance:	16~48m
Plate database:	LPR (database):10000 Plate Database

ADVANCED ANALYTICS

Infra Red 940

LPR

NDAA

MOTORISED LENS

ONVIF



PTZ

True WDR, IP66, SD Card, PoE+, General Analytics: Camera Tampering, DDA™ AI Analytics (Human, 2-wheels, 4-wheels Recognition): Line Crossing, Sterile Area, Object Counting (Line/Area), Face Detection, Face Recognition, Auto-Tracking (Human/Vehicle)

Z1-3IPSN-4(IR)

4MP

NDAA Compliance

Lens:	x3; 3.18mm (F1.6) – 7.42mm (F2.7)
Illumination:	IR LED for 20m
Preset speed:	80°/s
Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)
Audio:	In: 1Ch ; Out: 1Ch
Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact



LPR License Plate Recognition

Not Just Plates. Profiles.

Explore the full LPR solution

Know the Plate.
Handles the toughest and unexpected.

Know the Vehicle.
Type. Color. Brand. In real-time.

Z3-4ADSN-4 4MP 	<table><tr><td>Lens:</td><td>x4; 2.8mm (F1.6) – 12mm (F2.7)</td></tr><tr><td>Illumination:</td><td>IR LED for 50m</td></tr><tr><td>Preset speed:</td><td>50°/s</td></tr><tr><td>Smart tracking:</td><td>Auto Tracking based on DDA (Human / Vehicle)</td></tr><tr><td>Audio:</td><td>In: 1Ch + Built-in Microphone ; Out: 1Ch + Built-in Speaker</td></tr><tr><td>Alarm:</td><td>In: 1 Dry Contact ; Out: 1 Dry Contact</td></tr></table>	Lens:	x4; 2.8mm (F1.6) – 12mm (F2.7)	Illumination:	IR LED for 50m	Preset speed:	50°/s	Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)	Audio:	In: 1Ch + Built-in Microphone ; Out: 1Ch + Built-in Speaker	Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact	
Lens:	x4; 2.8mm (F1.6) – 12mm (F2.7)													
Illumination:	IR LED for 50m													
Preset speed:	50°/s													
Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)													
Audio:	In: 1Ch + Built-in Microphone ; Out: 1Ch + Built-in Speaker													
Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact													
MZ-20IPM-2(IR) 2MP	<table><tr><td>Lens:</td><td>X20</td></tr><tr><td>Illumination:</td><td>IR LED for 80m</td></tr><tr><td>Preset speed:</td><td>90°/s</td></tr><tr><td>Smart tracking:</td><td>No</td></tr><tr><td>Audio:</td><td>In: No ; Out: No</td></tr><tr><td>Alarm:</td><td>In: No ; Out: No</td></tr></table>	Lens:	X20	Illumination:	IR LED for 80m	Preset speed:	90°/s	Smart tracking:	No	Audio:	In: No ; Out: No	Alarm:	In: No ; Out: No	
Lens:	X20													
Illumination:	IR LED for 80m													
Preset speed:	90°/s													
Smart tracking:	No													
Audio:	In: No ; Out: No													
Alarm:	In: No ; Out: No													
Z4-25IPEN-2(IR) 2MP 	<table><tr><td>Lens:</td><td>x25; 4.8mm (F1.65) – 120mm (F3.8)</td></tr><tr><td>Illumination:</td><td>IR LED for 300m</td></tr><tr><td>Preset speed:</td><td>80°/s</td></tr><tr><td>Smart tracking:</td><td>Auto Tracking based on DDA (Human / Vehicle)</td></tr><tr><td>Audio:</td><td>In: 1Ch ; Out: 1Ch</td></tr><tr><td>Alarm:</td><td>In: 1 Dry Contact ; Out: 1 Dry Contact</td></tr></table>	Lens:	x25; 4.8mm (F1.65) – 120mm (F3.8)	Illumination:	IR LED for 300m	Preset speed:	80°/s	Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)	Audio:	In: 1Ch ; Out: 1Ch	Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact	
Lens:	x25; 4.8mm (F1.65) – 120mm (F3.8)													
Illumination:	IR LED for 300m													
Preset speed:	80°/s													
Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)													
Audio:	In: 1Ch ; Out: 1Ch													
Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact													
Z4-25IPEN-4(IR) 4MP 	<table><tr><td>Lens:</td><td>x25; 4.8mm (F1.65) – 120mm (F3.8)</td></tr><tr><td>Illumination:</td><td>IR LED for 160m</td></tr><tr><td>Preset speed:</td><td>80°/s</td></tr><tr><td>Smart tracking:</td><td>Auto Tracking based on DDA (Human / Vehicle)</td></tr><tr><td>Audio:</td><td>In: 1Ch ; Out: 1Ch</td></tr><tr><td>Alarm:</td><td>In: 1 Dry Contact ; Out: 1 Dry Contact</td></tr></table>	Lens:	x25; 4.8mm (F1.65) – 120mm (F3.8)	Illumination:	IR LED for 160m	Preset speed:	80°/s	Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)	Audio:	In: 1Ch ; Out: 1Ch	Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact	
Lens:	x25; 4.8mm (F1.65) – 120mm (F3.8)													
Illumination:	IR LED for 160m													
Preset speed:	80°/s													
Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)													
Audio:	In: 1Ch ; Out: 1Ch													
Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact													
Z5-25IPEN-4(IR) 4MP 	<table><tr><td>Lens:</td><td>x25; 4.8mm (F1.55) – 120mm (F3.8)</td></tr><tr><td>Illumination:</td><td>IR LED for 200m</td></tr><tr><td>Preset speed:</td><td>330°/s</td></tr><tr><td>Smart tracking:</td><td>Auto Tracking based on DDA (Human / Vehicle)</td></tr><tr><td>Audio:</td><td>In: 1Ch ; Out: 1Ch</td></tr><tr><td>Alarm:</td><td>In: 1 Dry Contact ; Out: 1 Dry Contact</td></tr></table>	Lens:	x25; 4.8mm (F1.55) – 120mm (F3.8)	Illumination:	IR LED for 200m	Preset speed:	330°/s	Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)	Audio:	In: 1Ch ; Out: 1Ch	Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact	
Lens:	x25; 4.8mm (F1.55) – 120mm (F3.8)													
Illumination:	IR LED for 200m													
Preset speed:	330°/s													
Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)													
Audio:	In: 1Ch ; Out: 1Ch													
Alarm:	In: 1 Dry Contact ; Out: 1 Dry Contact													
Z7-37IPEN-4(IR) 4MP 	<table><tr><td>Lens:</td><td>x37; 6mm (F1.2) – 222mm (F4.6)</td></tr><tr><td>Illumination:</td><td>IR LED for 400m</td></tr><tr><td>Preset speed:</td><td>240°/s</td></tr><tr><td>Smart tracking:</td><td>Auto Tracking based on DDA (Human / Vehicle)</td></tr><tr><td>Audio:</td><td>In: 1Ch ; Out: 1Ch</td></tr><tr><td>Alarm:</td><td>In: 2 Dry Contact ; Out: 2 Dry Contact</td></tr></table>	Lens:	x37; 6mm (F1.2) – 222mm (F4.6)	Illumination:	IR LED for 400m	Preset speed:	240°/s	Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)	Audio:	In: 1Ch ; Out: 1Ch	Alarm:	In: 2 Dry Contact ; Out: 2 Dry Contact	
Lens:	x37; 6mm (F1.2) – 222mm (F4.6)													
Illumination:	IR LED for 400m													
Preset speed:	240°/s													
Smart tracking:	Auto Tracking based on DDA (Human / Vehicle)													
Audio:	In: 1Ch ; Out: 1Ch													
Alarm:	In: 2 Dry Contact ; Out: 2 Dry Contact													
I5PT-320IPMX4-P 2MP	<table><tr><td>Lens:</td><td>X4</td></tr><tr><td>Illumination:</td><td>IR LED for 50m</td></tr><tr><td>Preset speed:</td><td>12°/s</td></tr><tr><td>Smart tracking:</td><td>No</td></tr><tr><td>Audio:</td><td>In: No ; Out: No</td></tr><tr><td>Alarm:</td><td>In: No ; Out: No</td></tr></table>	Lens:	X4	Illumination:	IR LED for 50m	Preset speed:	12°/s	Smart tracking:	No	Audio:	In: No ; Out: No	Alarm:	In: No ; Out: No	
Lens:	X4													
Illumination:	IR LED for 50m													
Preset speed:	12°/s													
Smart tracking:	No													
Audio:	In: No ; Out: No													
Alarm:	In: No ; Out: No													

Intercom

The new Intercom System
Where Vision meets Vigilance



From **private villas to multi-unit buildings**, Provision-ISR's Intercom System brings smart, secure access to your doorstep. Manage visitors effortlessly from your monitor or smartphone. Welcome guests, open doors, and stay informed, all with a tap.



Video Intercom System

Safety starts at the doorstep with Provision-ISR technology.

Intercom



Smart at the gate. Sharp on the screen. Simple on the app.

Step into **smarter access control** with the Provision-ISR Intercom System. Whether at home, in the office, or managing a multi-tenant complex, the system empowers you to **manage visitors** with ease. **Greet guests, grant access**, and monitor entry activity directly from your **smartphone or monitor**.

This all-in-one solution for **private homes**, offices, and **large-scale buildings** combines **cutting-edge AI face recognition**, video communication, and complete mobile and monitor-based control. With a **friendly interface** and **strong privacy features**, it adapts to your needs, whether simple or complex.

Built for Scale: From Private Homes to Complexes

The Intercom System supports large-scale buildings and multi-tenant complexes. With expanded support for multiple outdoor units, **up to 1,000 rooms with up to 5 users per room** per building, and complete app-based management, installers can now confidently take on even the biggest projects.

From villas to high-rises,
the Provision-ISR Intercom System
keeps every entrance covered



MON-TCH7

This 7" **touchscreen monitor** gives users complete control and convenience, whether used as a **powerhouse standalone unit** or **integrated into the Provision-ISR intercom system**.

It supports up to **16 cameras** with a **4-channel live view simultaneously**, serving as a full surveillance hub.

Two-way audio, one-way video, and dual door unlocking ensure smooth and secure interactions with visitors.

When used within the intercom system, it allows direct communication with visitors, **monitor-to-monitor calls** between rooms or units, and seamless connection with the Cam2 App.

The monitor supports **256GB microSD storage** for snapshots and recordings, a user-friendly web interface, **8 alarm inputs** for sensor-based alerts, and convenient features such as customizable ringtones, **a do-not-disturb mode**, and flexible connectivity via **PoE**, Ethernet, or **2.4GHz Wi-Fi**.



Universal IP Camera Monitor



7" IPS Touch Screen



Cam2 Mobile App



Mon-to-Mon communication



Wi-Fi & PoE



Local Storage

INT-320WIPN


Provision-ISR's Intercom System combines **Deep 3D facial recognition**, **high-resolution WDR camera**, full HD video, and app-based control in a smart, secure unit. Designed for **private homes**, office buildings, and **multi-dwelling complexes**, it adapts to a range of installation sizes and user needs.

Visitors can reach tenants through the **built-in phonebook and call button**, allowing for direct communication with monitors, the Cam2 App, or the Ossia VMS system.

The system supports **multi-resident access** (up to **1,000 rooms** and **5,000 users** per unit) and offers customizable two-step authentication via face, PIN, or RFID.

End-to-end encryption ensures **full compliance with NDAA standards** and privacy protection.

Built-in **two-way audio**, **IR night vision**, and a wide 132° viewing angle deliver clear communication day or night. The unit is equipped with Power over Ethernet (**PoE**), **Wi-Fi** (2.4GHz), and **SD card support** (up to 256GB), while the weather-resistant **IP65 casing** ensures long-term durability in outdoor environments.

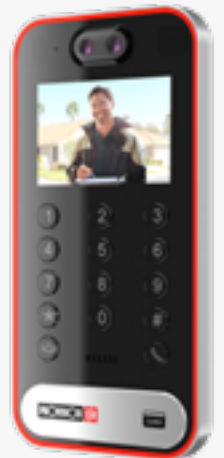

Built-in Mic & Speaker



Wi-Fi & PoE



Call Button & Phonebook



IP65



Multi-Resident Support



3D Face Recognition

DB-320WIPN

2MP video doorbell with IR/white LEDs, audio, and Cam2 app connectivity.



PR-Chime


Wireless chime with 8 tones, 5 volume levels, and magnetic mounting.



Solar Cellular IP Camera Kit

Solar Brilliance & Cellular Resilience - Powering Your Protection

Solarcam^{4G}

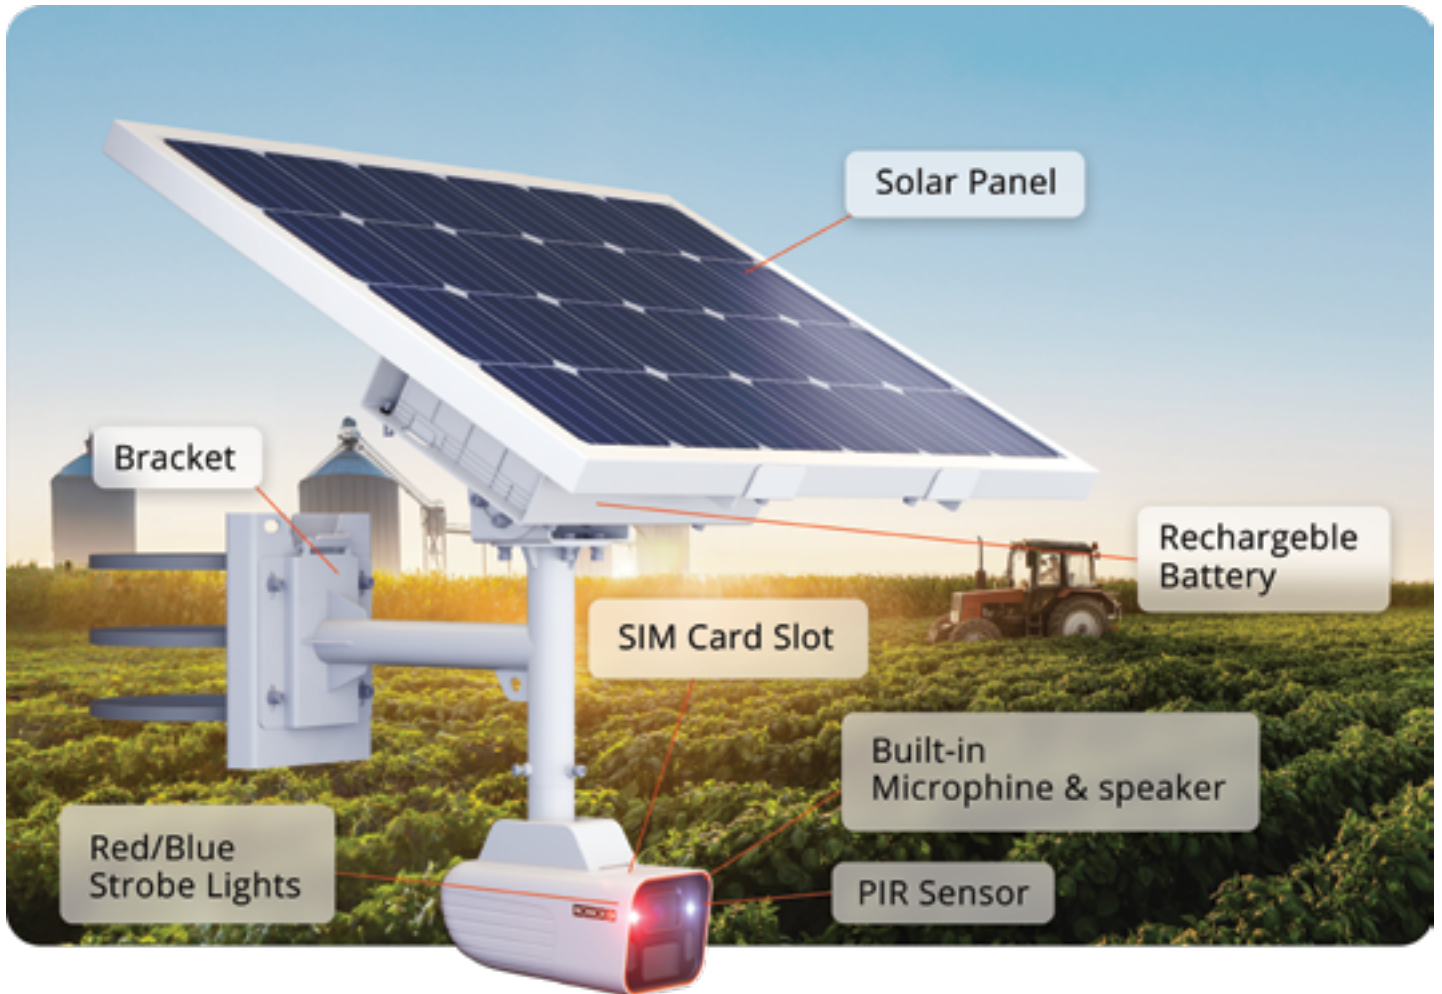

Power Anywhere, Secure Everywhere.

Experience ultimate flexibility in surveillance with Provision-ISR's Solar and Cellular IP Cameras. The solar model harnesses clean, renewable energy for continuous wire-free operation, making it perfect for remote or hard-to-reach locations.

The cellular model combines reliable connectivity with wired power for versatile installations that need constant energy.

Both cameras feature rugged aluminum and polycarbonate bodies designed to withstand harsh weather conditions and maintain strong signal integrity. Ideal for residential, commercial, and industrial settings, these advanced cameras deliver seamless security with easy setup and trusted performance.

DDA⁷
GENERATION

Artificial Intelligence

Provision-ISR's DDA™ Video Analytics technology distinguishes between humans, 2-wheeled, and 4-wheeled vehicles, improving surveillance accuracy. The DDA™ system includes line crossing and sterile area monitoring for thorough security coverage.

SMART ALERT
ACTIVE DETERRENCE CAMERAS

Smart Alert

Flash and sound serve as deterrents (strobe light and speaker). When the camera detects a DDA™ Analytics event, you can opt for on-site alerts via strobe lighting, pre-recorded message, or both, bolstering security with visible and audible deterrents.

rainbow
COLOR NIGHT VISION

Color Night Vision

Unlike traditional methods reliant on infrared illumination, our Solar Cellular IP Camera redefines low-light monitoring by capturing vibrant, full-color images even in the darkest environments.



SOL1-240ADSRN-36

Efficiently harnessing solar energy, our DDA Solar Cellular Camera ensures uninterrupted surveillance with minimal environmental impact.

This 4MP bullet camera features a 3.6mm fixed lens, offers affordability, reliability, and high performance, and is ideal for indoor and outdoor short-distance monitoring up to 20m.

With active deterrence capabilities, it alerts against unwelcome intrusions using its built-in speaker and vibrant visual cues (red and blue lights). Equipped with super light-sensitive sensors, it delivers vivid color images day and night. Integrated lighting kicks in when ambient light is insufficient, ensuring continuous full-color imaging.

The SOL1-240ADSRN-36 camera is the ultimate outdoor surveillance solution for areas with no network or power infrastructure.

Specification Highlights

- Resolution: 2560 × 1440 12FPS
- Lens: 3.6mm (92°)
- Illumination: 2 High-Power White LED: Full power: 20m or Low power: 10m + Red/Blue Strobe lights
- Compression: H.265 / H.264 / H.265+ / H.264+ / MJPEG (Sub stream only)
- General Analytics: Camera Tampering
- AI (Object Recognition): DDA Sterile Area, DDA Line Crossing
- True WDR (120dB), BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 256GB)
- ONVIF: Supports simultaneous monitoring of up to 3 users with multi-stream real-time transmission
- Water Proof: IP67
- Power Consumption: < 5W
- Lower Power Mode: 3.5 W (4G working)
- Power Supply: 12 VDC ± 25%
- 60 W ± 2Watt On Solar panels
- Mobile Communication: Micro SIM, LTE-TDD: Band 38/39/40/41;
- LTE-FDD: Band 1/2/3/4/5/7/8/12/13/18/19/20/25/26/28
- WCDMA: Band 1/5/8
- GSM: Band 2/3/5/8"
- Battery Type: LFP battery (lithium iron phosphate battery)
- Battery Voltage: 12.8V
- Operating Temperature: Charging: -20 °C to 45 °C (-4 °F to 113 °F)
Discharging: -20 °C to 60 °C (-4 °F to 140 °F)
- Battery Life: More than 2000 charging cycles"



CEL1-240ADSRN-36

DDA Cellular Camera ensures uninterrupted surveillance with minimal environmental impact.

This 4MP bullet camera features a 3.6mm fixed lens, offers affordability, reliability, and high performance, and is ideal for indoor and outdoor short-distance monitoring up to 20m.

With active deterrence capabilities, it alerts against unwelcome intrusions using its built-in speaker and vibrant visual cues (red and blue lights). Equipped with super light-sensitive sensors, it delivers vivid color images day and night. Integrated lighting kicks in when ambient light is insufficient, ensuring continuous full-color imaging.

The CEL1-240ADSRN-36 camera is the ultimate outdoor surveillance solution for areas with no network infrastructure.

Specification Highlights

- Resolution: 2560 × 1440 12FPS
- Lens: 3.6mm (92°)
- Illumination: 2 High-Power White LED: Full power: 20m or Low power: 10m + Red/Blue Strobe lights
- Compression: H.265 / H.264 / H.265+ / H.264+ / MJPEG (Sub stream only)
- General Analytics: Camera Tampering
- AI (Object Recognition): DDA Sterile Area, DDA Line Crossing
- True WDR (120dB), BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 256GB)
- ONVIF: Supports simultaneous monitoring of up to 3 users with multi-stream real-time transmission
- Water Proof: IP67
- Power Consumption: < 5W

PANORAMIC^{SERIES}

UNMATCHED COVERAGE. MAXIMUM IMPACT.

Experience effortless surveillance with our advanced panoramic camera. Delivering a seamless 180° view eliminates blind spots, reduces hardware costs, and enhances security in any environment. Perfect for businesses seeking smart, efficient, and durable solutions.



BPAN2-340ADRN | DPAN2-340ADRN



NDA
Compliance

DDA 2nd
GENERATION



CHECK POINT
EMBEDDED

NVR

Network Video Recorders



In standard installations - the NVR is the heart of the IP System.

It is responsible for smooth communication with the cameras and the constant recording of all the data received from the connected cameras.

Unlike DVRs, the NVR doesn't compress the video Signal received from the IP camera but only stores it the same way as the camera already compresses it.


CONVENTIONAL NVRs

These NVRs are connected to the network and communicate with the IP cameras through the general network, without a direct IP camera connection. This provides the installer the highest flexibility in the design of the system and the wiring. Basic knowledge in networking and general IP configuration is required.

POE NVRs

These NVRs perform as a local network switch by creating a closed internal network for the IP cameras. The IP cameras are connected directly to the NVR by one network cable which will provide PoE power and automatically configure the camera for display & record. These NVRs may also perform as conventional NVRs by dedicating some channels to communicating with any ONVIF camera connected to the network. No previous knowledge is required for this type of installation.

NVR - Model Name Index

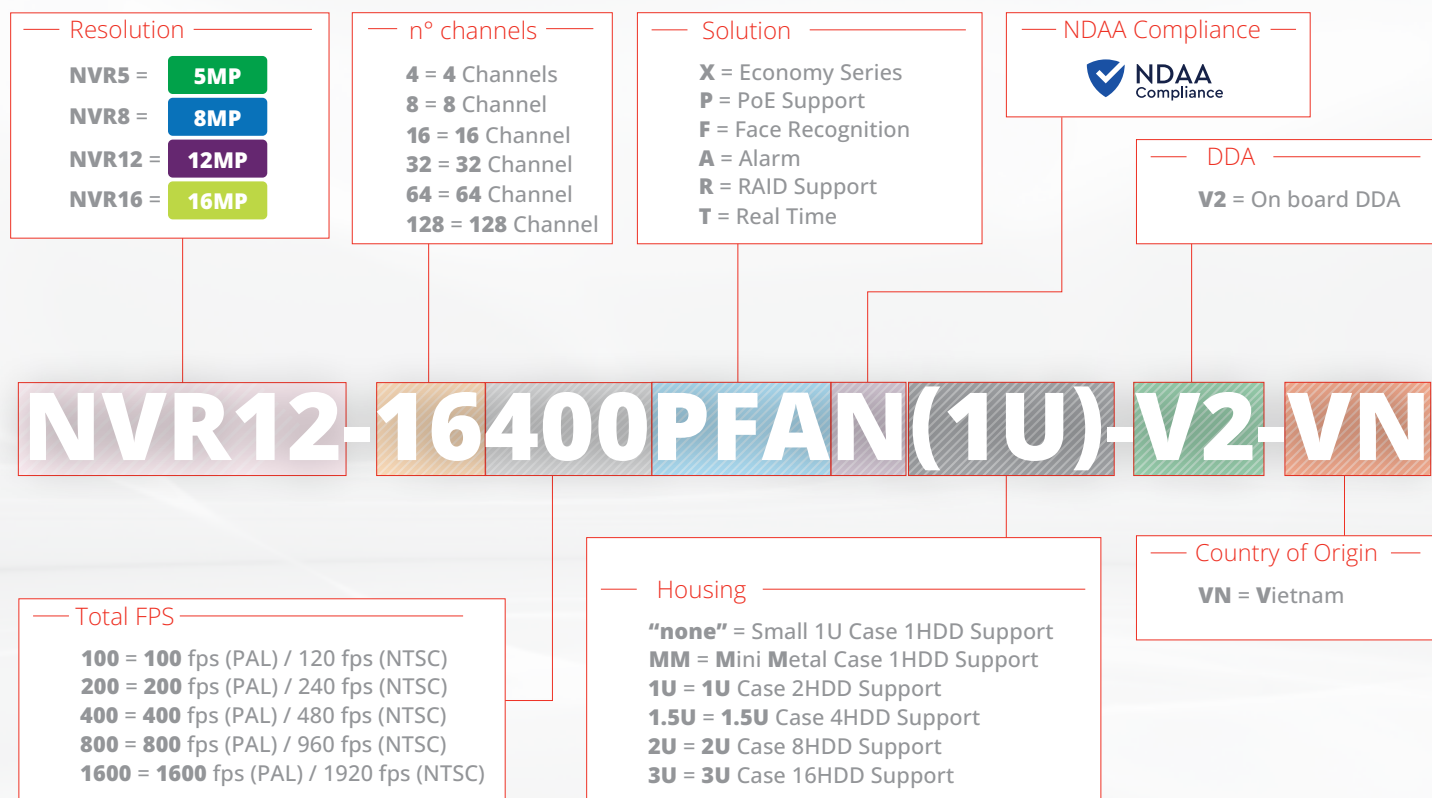

NVR

Real-time recording of all channels, H.265, Backup format AVI/DAT/MP4, Supported analytic- Camera Tampering, Object Classification, Line Crossing, Sterile Area, Loitering Detection, Illegal Parking, Audio Exception, Heat Map, Object Counting (Line/Area), Smart Search, Face Recognition, LPR, Thermal, Crowd Gathering, People Intrusion. Onboard analytic for non-analytic cameras and Advanced Face Recognition in supported models.

NVR 4 CHANNELS

NVR5-4100XN(MM)

4CH5MP

Video output:	HDMI+VGA
PoE Ports:	No
Bandwidth:	Incoming: 40Mbps ; / Outgoing: 64Mbps
Alarm:	In: Based on IPC only ; Out: Based on IPC only
Audio:	In: IPC Inputs Only ; Out: IPC Outputs Only
Hard Disk:	1 of 6TB each



NDAA

face detection

POWER OVER ETH

AI ENGINE

NVR5-4100PXN(MM)

4CH5MP

Video output:	HDMI+VGA
PoE Ports:	4
Bandwidth:	Incoming: 40Mbps ; / Outgoing: 64Mbps
Alarm:	In: Based on IPC only ; Out: Based on IPC only
Audio:	In: IPC Inputs Only ; Out: IPC Outputs Only
Hard Disk:	1 of 6TB each



NDAA

face detection

POWER OVER ETH

AI ENGINE

NVR8-4100PN-V2

4CH8MP



Video output:	HDMI+VGA
PoE Ports:	4
Bandwidth:	Incoming: 80Mbps ; / Outgoing: 80Mbps
Alarm:	In: Based on IPC only ; Out: Based on IPC only
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output
Hard Disk:	1 of 10TB each



NDAA

face detection

POWER OVER ETH

AI ENGINE

NVR 8 CHANNELS

NVR5-8200XN(MM)

8CH

5MP

Video output:	HDMI+VGA
PoE Ports:	No
Bandwidth:	Incoming: 64Mbps ; / Outgoing: 64Mbps
Alarm:	In: Based on IPC only ; Out: Based on IPC only
Audio:	In: IPC Inputs Only ; Out: IPC Outputs Only
Hard Disk:	1 of 6TB each



NDAA

face detection

POWER OVER ETH


AI ENGINE

NVR5-8200PXN(MM)

8CH

5MP

Video output:	HDMI+VGA
PoE Ports:	8
Bandwidth:	Incoming: 64Mbps ; / Outgoing: 64Mbps
Alarm:	In: Based on IPC only ; Out: Based on IPC only
Audio:	In: IPC Inputs Only ; Out: IPC Outputs Only
Hard Disk:	1 of 6TB each



NDAA

face detection

POWER OVER ETH


AI ENGINE

NVR8-8200N-V2

8CH **8MP**

CHECK POINT EMBEDDED

Video output:	HDMI+VGA
PoE Ports:	No
Bandwidth:	Incoming: 80Mbps ; / Outgoing: 80Mbps
Alarm:	In: Based on IPC only ; Out: Based on IPC only
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output
Hard Disk:	1 of 10TB each



NDAA

face detection

POWER OVER ETHERNET

AI ENGINE

NVR8-8200PN-V2

8CH **8MP**

CHECK POINT EMBEDDED

Video output:	HDMI+VGA
PoE Ports:	8
Bandwidth:	Incoming: 80Mbps ; / Outgoing: 80Mbps
Alarm:	In: Based on IPC only ; Out: Based on IPC only
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output
Hard Disk:	1 of 10TB each



NDAA

face detection

POWER OVER ETHERNET

AI ENGINE

NVR12-8200FAN

8CH **12MP**

CHECK POINT EMBEDDED

Video output:	HDMI+VGA
PoE Ports:	No
Bandwidth:	Incoming: 80Mbps ; / Outgoing: 80Mbps
Alarm:	In: 8+IPC ; Out: 4+IPC
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output
Hard Disk:	1 of 10TB each



NDAA

face recognition

POWER OVER ETHERNET

AI ENGINE

NVR12-8200PFAN

8CH **12MP**

CHECK POINT EMBEDDED

Video output:	HDMI+VGA
PoE Ports:	8
Bandwidth:	Incoming: 80Mbps ; / Outgoing: 80Mbps
Alarm:	In: 8+IPC ; Out: 4+IPC
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output
Hard Disk:	1 of 10TB each



NDAA

face recognition

POWER OVER ETHERNET

AI ENGINE

AI built-in. Smarter from the start.

Provision-ISR NVRs bring advanced analytics to every connected IP camera.




face


face

DDA 1st GENERATION

Learn how it works



NVR 16-32 CHANNELS

NVR8-16400AN(1U)-V2 16CH 8MP 	<table><tr><td>Video output:</td><td>HDMI+VGA</td></tr><tr><td>PoE Ports:</td><td>No</td></tr><tr><td>Bandwidth:</td><td>Incoming: 96Mbps ; / Outgoing: 96Mbps</td></tr><tr><td>Alarm:</td><td>In: 4+IPC ; Out: 1+IPC</td></tr><tr><td>Audio:</td><td>In: 1CH + IPC Inputs ; Out: 1CH + IPC Output</td></tr><tr><td>Hard Disk:</td><td>2 of 10TB each</td></tr></table>	Video output:	HDMI+VGA	PoE Ports:	No	Bandwidth:	Incoming: 96Mbps ; / Outgoing: 96Mbps	Alarm:	In: 4+IPC ; Out: 1+IPC	Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output	Hard Disk:	2 of 10TB each	    
Video output:	HDMI+VGA													
PoE Ports:	No													
Bandwidth:	Incoming: 96Mbps ; / Outgoing: 96Mbps													
Alarm:	In: 4+IPC ; Out: 1+IPC													
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output													
Hard Disk:	2 of 10TB each													
NVR12-16400FAN(1U) 16CH 12MP 	<table><tr><td>Video output:</td><td>HDMI+VGA</td></tr><tr><td>PoE Ports:</td><td>No</td></tr><tr><td>Bandwidth:</td><td>Incoming: 160Mbps ; / Outgoing: 160Mbps</td></tr><tr><td>Alarm:</td><td>In: 8+IPC ; Out: 4+IPC</td></tr><tr><td>Audio:</td><td>In: 1CH + IPC Inputs ; Out: 1CH + IPC Output</td></tr><tr><td>Hard Disk:</td><td>2 of 10TB each</td></tr></table>	Video output:	HDMI+VGA	PoE Ports:	No	Bandwidth:	Incoming: 160Mbps ; / Outgoing: 160Mbps	Alarm:	In: 8+IPC ; Out: 4+IPC	Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output	Hard Disk:	2 of 10TB each	    
Video output:	HDMI+VGA													
PoE Ports:	No													
Bandwidth:	Incoming: 160Mbps ; / Outgoing: 160Mbps													
Alarm:	In: 8+IPC ; Out: 4+IPC													
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output													
Hard Disk:	2 of 10TB each													
NVR12-16400PFAN(1U) 16CH 12MP 	<table><tr><td>Video output:</td><td>HDMI+VGA</td></tr><tr><td>PoE Ports:</td><td>16</td></tr><tr><td>Bandwidth:</td><td>Incoming: 160Mbps ; / Outgoing: 160Mbps</td></tr><tr><td>Alarm:</td><td>In: 8+IPC ; Out: 4+IPC</td></tr><tr><td>Audio:</td><td>In: 1CH + IPC Inputs ; Out: 1CH + IPC Output</td></tr><tr><td>Hard Disk:</td><td>2 of 10TB each</td></tr></table>	Video output:	HDMI+VGA	PoE Ports:	16	Bandwidth:	Incoming: 160Mbps ; / Outgoing: 160Mbps	Alarm:	In: 8+IPC ; Out: 4+IPC	Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output	Hard Disk:	2 of 10TB each	    
Video output:	HDMI+VGA													
PoE Ports:	16													
Bandwidth:	Incoming: 160Mbps ; / Outgoing: 160Mbps													
Alarm:	In: 8+IPC ; Out: 4+IPC													
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output													
Hard Disk:	2 of 10TB each													
NVR12-32800FAN(1U) 32CH 12MP 	<table><tr><td>Video output:</td><td>2xHDMI+VGA</td></tr><tr><td>PoE Ports:</td><td>No</td></tr><tr><td>Bandwidth:</td><td>Incoming: 320Mbps ; / Outgoing: 256Mbps</td></tr><tr><td>Alarm:</td><td>In: 8+IPC ; Out: 4+IPC</td></tr><tr><td>Audio:</td><td>In: 1CH + IPC Inputs ; Out: 1CH + IPC Output</td></tr><tr><td>Hard Disk:</td><td>2 of 10TB each</td></tr></table>	Video output:	2xHDMI+VGA	PoE Ports:	No	Bandwidth:	Incoming: 320Mbps ; / Outgoing: 256Mbps	Alarm:	In: 8+IPC ; Out: 4+IPC	Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output	Hard Disk:	2 of 10TB each	    
Video output:	2xHDMI+VGA													
PoE Ports:	No													
Bandwidth:	Incoming: 320Mbps ; / Outgoing: 256Mbps													
Alarm:	In: 8+IPC ; Out: 4+IPC													
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output													
Hard Disk:	2 of 10TB each													
NVR12-32800RFAN(2U) 32CH 12MP 	<table><tr><td>Video output:</td><td>2xHDMI+VGA</td></tr><tr><td>PoE Ports:</td><td>No</td></tr><tr><td>Bandwidth:</td><td>Incoming: 320Mbps ; / Outgoing: 320Mbps</td></tr><tr><td>Alarm:</td><td>In: 16+IPC ; Out: 4+IPC</td></tr><tr><td>Audio:</td><td>In: 1CH + IPC Inputs ; Out: 1CH + IPC Output</td></tr><tr><td>Hard Disk:</td><td>8 of 10TB each</td></tr></table>	Video output:	2xHDMI+VGA	PoE Ports:	No	Bandwidth:	Incoming: 320Mbps ; / Outgoing: 320Mbps	Alarm:	In: 16+IPC ; Out: 4+IPC	Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output	Hard Disk:	8 of 10TB each	    
Video output:	2xHDMI+VGA													
PoE Ports:	No													
Bandwidth:	Incoming: 320Mbps ; / Outgoing: 320Mbps													
Alarm:	In: 16+IPC ; Out: 4+IPC													
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output													
Hard Disk:	8 of 10TB each													
NVR12-32800FN-16P(2U) 32CH 12MP 	<table><tr><td>Video output:</td><td>2xHDMI+VGA</td></tr><tr><td>PoE Ports:</td><td>16</td></tr><tr><td>Bandwidth:</td><td>Incoming: 320Mbps ; / Outgoing: 256Mbps</td></tr><tr><td>Alarm:</td><td>In: 16+IPC ; Out: 4+IPC</td></tr><tr><td>Audio:</td><td>In: 1CH + IPC Inputs ; Out: 1CH + IPC Output</td></tr><tr><td>Hard Disk:</td><td>8 of 10TB each</td></tr></table>	Video output:	2xHDMI+VGA	PoE Ports:	16	Bandwidth:	Incoming: 320Mbps ; / Outgoing: 256Mbps	Alarm:	In: 16+IPC ; Out: 4+IPC	Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output	Hard Disk:	8 of 10TB each	    
Video output:	2xHDMI+VGA													
PoE Ports:	16													
Bandwidth:	Incoming: 320Mbps ; / Outgoing: 256Mbps													
Alarm:	In: 16+IPC ; Out: 4+IPC													
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output													
Hard Disk:	8 of 10TB each													

NVR 64-128 CHANNELS

NVR16-641600RFAN(2U)

64CH

16MP



Video output:	4xHDMI+VGA
PoE Ports:	No
Bandwidth:	Incoming: 640Mbps ; / Outgoing: 640Mbps
Alarm:	In: 16+IPC ; Out: 4+IPC
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output
Hard Disk:	8 of 10TB each



NVR16-128RFAN(3U)

128CH

16MP



Video output:	4xHDMI+VGA
PoE Ports:	No
Bandwidth:	Incoming: 768Mbps ; / Outgoing: 768Mbps
Alarm:	In: 24+IPC ; Out: 4+IPC
Audio:	In: 1CH + IPC Inputs ; Out: 1CH + IPC Output
Hard Disk:	16 of 10TB each



Smart Upgrades. Smarter Security.

New Features Available on Provision-ISR NVRs




Cyber Threat
Real-Time Alerts



DDA Search
One-click targeted search



Network Diagnostics
Built-in



More features online



Switch PoE

Switch PoE

STANDARD 10/100 Mbps

Synonymous with high reliability and easy installation, Provision-ISR's 10/100 Mbps PoE line has been meticulously designed for standard IP surveillance systems.

With options of 4/8/16/24 ports, standard up-link, and SFP ports (depending on the model), this line offers a suitable solution for any type of installation.

All models comply with IEEE 802.3 and automatically detect power-consuming devices (PD) and their energy consumption level.

SWITCH POE PROFESSIONAL 10/100/1000 Mbps

The 1,000Mbps (gigabit) PoE switches are designed for security industry professionals.

The models with 16/24 ports feature an LCD monitor located on the front panel, which allows for viewing the following system information: Single channel output power (W), Overload protection (OLP), Short circuit protection (SCP), Low voltage/Overvoltage alarms, High temperature alarms.

SWITCH POE LCD

An intuitive Color LCD panel positioned on the front of the switch Simplifies Ethernet and PD PoE management.

The LCD panel enables efficient management of large-scale networks, such as enterprises, hotels, shopping malls, government buildings, and other public areas. It provides various special management and status functions, including PoE management and status, port management and status, switch mode, bandwidth control, PD control, and maintenance checks.



KEEP ALIVE

The "KEEP ALIVE" feature of Provision-ISR's PoE switches is designed to detect a malfunctioning Powered Device (PD) that has caused communication disruption.

The feature restarts the hardware by removing and restoring the power supply.

If the connected camera is drawing power but not generating data traffic, it will be automatically restarted! This function can be individually set for each of the PoE ports!




CCTV MODE

The TVCC (Closed Circuit Television) mode is actually a preconfigured VLAN (not customizable by the user) that prevents all communications between the down-link ports.

The TVCC mode limits communication to 10 Mbps to increase stability.

The absence of communication between the down-link ports (VLAN) helps improve network security and data transmission efficiency.

By limiting the communication speed to 10 Mbps, the communication distance can be increased up to a maximum of 250 meters.

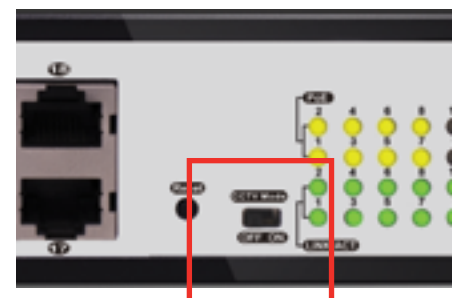

Switch PoE 10/100 Mbps

TVCC MODE: Up to 250m at 10 Mbps, no communication between down-link ports, PoE (8W Max), Surge protection. Compliant with IEEE802.3af/at.

	PoES-0460C+2I-V2 	PoES-08120C+2I-V2 
Down-link ports	4 x 10/100 Mbps	8 x 10/100 Mbps
Up-link ports	2 x 10/100 Mbps	2 x 10/100 Mbps
Total power	60W (Avg:15W Max 30W per ch)	120W (Avg:15W Max 30W per ch)
Keep alive	Yes	Yes
Display	-	Color LCD

	PoES-16250C+2Combo V2 	FIBER POES-16250CL+2G+2SFP 
Down-link ports	16 x 10/100 Mbps	16 x 10/100 Mbps
Up-link ports	2 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps + 2 X SFP
Total power	250W	250W (Avg:15.6W Max 30W per ch)
Keep alive	Yes	Yes
Display	-	Color LCD

	PoES-24370C+2 Combo 	FIBER POES-24370CL+2G+2SFP 
Down-link ports	24 x 10/100 Mbps	24 x 10/100 Mbps
Up-link ports	2 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps + 2 x SFP
Total power	370W (Avg:12.5W Max 30W per ch)	370W (Avg:15.4W Max 30W per ch)
Keep alive	-	Yes
Display	-	Color LCD

Switch PoE 10/100/1000 Mbps

TVCC MODE: Up to 250m at 10 Mbps, no communication between down-link ports. PoE (8W Max), Surge protection. Compliant with IEEE802.3af/at.

	PoES-0472GC+2G 	PoES-08120GC+2GI 
Down-link ports	4 x 10/100/1000 Mbps	8 x 10/100/1000 Mbps
Up-link ports	2 x 10/100/1000 Mbps	2 x 10/100/1000 Mbps
Total power	72W (Avg:18W Max 30W per ch)	120W (Avg:15W Max 30W per ch)
Keep alive	-	-
Display	-	-

	FIBER PoES-08120GCL+2combo 	FIBER POES-16250GCL+2SFP 
Down-link ports	8 x 10/100/1000 Mbps	16 x 10/100/1000 Mbps
Up-link ports	2 x 10/100/1000 Mbps + 2 x SFP	2 x SFP
Total power	120W (Avg:15.4W Max 30W per ch)	250W (Avg:15.6W Max 30W per ch)
Keep alive	Yes	Yes
Display	Color LCD	Color LCD

Switch PoE 10/100/1000 Mbps

TVCC MODE: Up to 250m at 10 Mbps, no communication between down-link ports. PoE (8W Max), Surge protection. Compliant with IEEE802.3af/at.

POES-24370GCL+2SFP

FIBER



Down-link ports	24 x 10/100/1000 Mbps
Up-link ports	2 x SFP
Total power	370W (Avg:15.4W Max 30W per ch)
Keep alive	Yes
Display	Color LCD

Powered Device Switch PoE 10/100/1000 Mbps

Surge protection.
Compliant with IEEE802.3af/at.

PoES-0460G+1G(HPD)



Down-link ports	4 x 10/100/1000 Mbps
Up-link ports	1 x 10/100/1000 Mbps (Powered Device)
Total power	55W (Avg:13.75W Max 30W per ch)
Power supply	Ethernet injector POE PoEI-0160 (Non incluso)

PoE Accessories

PoESP-0124W SPLITTER ETHERNET 1 CH POE

- Adjustable output: 5VDC/2A, 9VDC/2A o 12VDC/2A
- Maximum Power Output: Up To 24W
- Short-Circuit Protection
- High Efficiency DC/DC Converter



PoESP-0172W SPLITTER ETHERNET 1 CH POE

- Output: 24VDC / 3A
- Maximum Power Output: Up To 72W
- Short-Circuit Protection
- High Efficiency DC/DC Converter
- DC Jack / Terminal Connector Output



PoEI-0130 | PoEI-0190 ETHERNET INJECTOR 1 CH POE

- Down-link: 1x 100 Mbps
- Output: PoEI-0130 max 30W - PoEI-0190 max 90W
- Internal power supply (require 110/220AC input)
- Distance: up to 100 Meters
- Built-in surge protection



PoER-01 EXTENDER (REPEATER) 1 CH POE

- Extends PoE Ethernet range up to additional 100 meters (10/100Mbps Ethernet)
- No additional power supply is required
- Automatically detects and protects PoE equipment from being damaged by incorrect installation



DCoE-01 NON-POE POWER OVER ETHERNET CONVERTER

- Set-Transmitter/Receiver
- 50 Meters working distance
- Camera DC power supply needed
- Supplies DC power input to the camera - Not PoE



HD Series

Cameras



Basic

2MP -3K

Series marked for the installer looking for a high-level camera emphasizing the difference in image quality. The Pro series cameras are suitable for indoor and outdoor applications where professional video surveillance is required.



Pro

2MP - 3K - 8MP

Series marked for the installer looking for a high-level camera emphasizing the difference in image quality. The Pro series cameras are suitable for indoor and outdoor applications where professional video surveillance is required.

Analog Cameras - Model Name Index



Provision-ISR HD range also includes:

A series of PTZ cameras for wide-area coverage

A series of special cameras specifically designed for non-conventional applications (box, hidden and PIR cameras)



Basic HD

Selectable Output (AHD/TVI/CVI/CVBS), PAL/NTSC support (DIP Switch), COC Support, IP67

DH-320AB-28 2MP	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (95°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Power Supply:</td><td>DC12V/350mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (95°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone	Power Supply:	DC12V/350mA	4 IN 1 BUILT-IN MICROPHONE FIXED LENS Hybrid	
Lens:	2.8mm Mega-Pixel Fixed (95°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone										
Power Supply:	DC12V/350mA										
BSH-320AB-28 2MP	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (95°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Power Supply:</td><td>DC12V/350mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (95°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone	Power Supply:	DC12V/350mA	4 IN 1 BUILT-IN MICROPHONE FIXED LENS Hybrid	
Lens:	2.8mm Mega-Pixel Fixed (95°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone										
Power Supply:	DC12V/350mA										
DH-33K0AB-28 3K	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (95°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Power Supply:</td><td>DC12V/350mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (95°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone	Power Supply:	DC12V/350mA	4 IN 1 BUILT-IN MICROPHONE FIXED LENS Hybrid	
Lens:	2.8mm Mega-Pixel Fixed (95°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone										
Power Supply:	DC12V/350mA										
BSH-33K0AB-28 3K	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (95°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED) 20m (1 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Power Supply:</td><td>DC12V/350mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (95°)	Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)	Audio:	Built-in Microphone	Power Supply:	DC12V/350mA	4 IN 1 BUILT-IN MICROPHONE FIXED LENS Hybrid	
Lens:	2.8mm Mega-Pixel Fixed (95°)										
Illumination:	20m (1 High-Power IR LED) 20m (1 High-Power White LED)										
Audio:	Built-in Microphone										
Power Supply:	DC12V/350mA										



Pro HD

Selectable Output (AHD/TVI/CVI/CVBS), PAL/NTSC support (DIP Switch), COC Support, IP67

BX-391A 2MP	Lens:	Depands on lens	4 IN 1 Built-in Microphone RGB Lens IR Illuminator 
	Illumination:	N/A	
	Audio:	N/A	
	Power Supply:	DC12V±10%, ~80mA	

DI-320A-28 2MP	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (88°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/300mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (88°)	Illumination:	20m (1 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/300mA	4 IN 1 FIXED LENS	BUILT-IN MICROPHONE Infra Red	
Lens:	2.8mm Mega-Pixel Fixed (88°)											
Illumination:	20m (1 High-Power IR LED)											
Audio:	N/A											
Power Supply:	DC12V/300mA											
DI-320A-VF 2MP	<table><tr><td>Lens:</td><td>2.8-12mm Mega-Pixel Vari-Focal (92°-34°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/400mA</td></tr></table>	Lens:	2.8-12mm Mega-Pixel Vari-Focal (92°-34°)	Illumination:	40m (3 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/400mA	4 IN 1 VARI-FOCAL LENS	BUILT-IN MICROPHONE Infra Red	
Lens:	2.8-12mm Mega-Pixel Vari-Focal (92°-34°)											
Illumination:	40m (3 High-Power IR LED)											
Audio:	N/A											
Power Supply:	DC12V/400mA											
DI-320A-VF-G 2MP	<table><tr><td>Lens:</td><td>2.8-12mm Mega-Pixel Vari-Focal (92°-34°)</td></tr><tr><td>Illumination:</td><td>40m (3 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/400mA</td></tr></table>	Lens:	2.8-12mm Mega-Pixel Vari-Focal (92°-34°)	Illumination:	40m (3 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/400mA	4 IN 1 VARI-FOCAL LENS	BUILT-IN MICROPHONE Infra Red	
Lens:	2.8-12mm Mega-Pixel Vari-Focal (92°-34°)											
Illumination:	40m (3 High-Power IR LED)											
Audio:	N/A											
Power Supply:	DC12V/400mA											
I2-320A-28 2MP	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (88°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/250mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (88°)	Illumination:	20m (1 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/250mA	4 IN 1 FIXED LENS	BUILT-IN MICROPHONE Infra Red	
Lens:	2.8mm Mega-Pixel Fixed (88°)											
Illumination:	20m (1 High-Power IR LED)											
Audio:	N/A											
Power Supply:	DC12V/250mA											
I4-320A-28 2MP	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (85°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/450mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (85°)	Illumination:	40m (2 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/450mA	4 IN 1 FIXED LENS	BUILT-IN MICROPHONE Infra Red	
Lens:	2.8mm Mega-Pixel Fixed (85°)											
Illumination:	40m (2 High-Power IR LED)											
Audio:	N/A											
Power Supply:	DC12V/450mA											

See the Bigger Picture

3K Analog Cameras with Widescreen Format

3K 16:9

SMP 4:3

3K 16:9

Widescreen isn't a luxury - it's a new standard.

I4-320A-VF 2MP	<table><tr><td>Lens:</td><td>2.8-12mm Mega-Pixel Vari-Focal (96°-34°)</td></tr><tr><td>Illumination:</td><td>40m (2 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/400mA</td></tr></table> 4 IN 1 BUILT-IN MICROPHONE VARI-FOCAL LENS Infra Red LED 	Lens:	2.8-12mm Mega-Pixel Vari-Focal (96°-34°)	Illumination:	40m (2 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/400mA
Lens:	2.8-12mm Mega-Pixel Vari-Focal (96°-34°)								
Illumination:	40m (2 High-Power IR LED)								
Audio:	N/A								
Power Supply:	DC12V/400mA								
IV-390A37 V2 2MP	<table><tr><td>Lens:</td><td>3.7mm Mega-Pixel Fixed (78°)</td></tr><tr><td>Illumination:</td><td>10m (2 Invisible IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/300mA</td></tr></table> 4 IN 1 BUILT-IN MICROPHONE FIXED LENS Infra Red LED 	Lens:	3.7mm Mega-Pixel Fixed (78°)	Illumination:	10m (2 Invisible IR LED)	Audio:	N/A	Power Supply:	DC12V/300mA
Lens:	3.7mm Mega-Pixel Fixed (78°)								
Illumination:	10m (2 Invisible IR LED)								
Audio:	N/A								
Power Supply:	DC12V/300mA								
MC-392A37 2MP	<table><tr><td>Lens:</td><td>3.7mm Pinhole Lens (78°)</td></tr><tr><td>Illumination:</td><td>N/A</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V±10%, ~72mA</td></tr></table> 4 IN 1 BUILT-IN MICROPHONE FIXED LENS 12 CHANNEL H.265+ 	Lens:	3.7mm Pinhole Lens (78°)	Illumination:	N/A	Audio:	N/A	Power Supply:	DC12V±10%, ~72mA
Lens:	3.7mm Pinhole Lens (78°)								
Illumination:	N/A								
Audio:	N/A								
Power Supply:	DC12V±10%, ~72mA								
MC-322AP-37 2MP	<table><tr><td>Lens:</td><td>3.7mm Pinhole Lens (78°)</td></tr><tr><td>Illumination:</td><td>N/A</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V±10%, ~72mA</td></tr></table> 4 IN 1 BUILT-IN MICROPHONE FIXED LENS 12 CHANNEL H.265+ 	Lens:	3.7mm Pinhole Lens (78°)	Illumination:	N/A	Audio:	N/A	Power Supply:	DC12V±10%, ~72mA
Lens:	3.7mm Pinhole Lens (78°)								
Illumination:	N/A								
Audio:	N/A								
Power Supply:	DC12V±10%, ~72mA								
DI-33K0AP-28 3K	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (100°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Power Supply:</td><td>DC12V/250mA</td></tr></table> 4 IN 1 BUILT-IN MICROPHONE FIXED LENS Infra Red LED 	Lens:	2.8mm Mega-Pixel Fixed (100°)	Illumination:	20m (1 High-Power IR LED)	Audio:	Built-in Microphone	Power Supply:	DC12V/250mA
Lens:	2.8mm Mega-Pixel Fixed (100°)								
Illumination:	20m (1 High-Power IR LED)								
Audio:	Built-in Microphone								
Power Supply:	DC12V/250mA								
DI-33K0AP-MVF 3K	<table><tr><td>Lens:</td><td>2.8-12mm Mega-Pixel Motorized Vari-Focal (104°-38°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/450mA</td></tr></table> 4 IN 1 BUILT-IN MICROPHONE MOTORIZED LENS Infra Red LED 	Lens:	2.8-12mm Mega-Pixel Motorized Vari-Focal (104°-38°)	Illumination:	40m (1 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/450mA
Lens:	2.8-12mm Mega-Pixel Motorized Vari-Focal (104°-38°)								
Illumination:	40m (1 High-Power IR LED)								
Audio:	N/A								
Power Supply:	DC12V/450mA								
DI-33K0AP-MVF-G 3K	<table><tr><td>Lens:</td><td>2.8-12mm Mega-Pixel Motorized Vari-Focal (104°-38°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/450mA</td></tr></table> 4 IN 1 BUILT-IN MICROPHONE MOTORIZED LENS Infra Red LED 	Lens:	2.8-12mm Mega-Pixel Motorized Vari-Focal (104°-38°)	Illumination:	40m (1 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/450mA
Lens:	2.8-12mm Mega-Pixel Motorized Vari-Focal (104°-38°)								
Illumination:	40m (1 High-Power IR LED)								
Audio:	N/A								
Power Supply:	DC12V/450mA								

I2-33K0AP-28 3K	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (100°)</td></tr><tr><td>Illumination:</td><td>20m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Power Supply:</td><td>DC12V/250mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (100°)	Illumination:	20m (1 High-Power IR LED)	Audio:	Built-in Microphone	Power Supply:	DC12V/250mA	4 IN 1 FIXED LENS	BUILT-IN MICROPHONE Infra Red	
Lens:	2.8mm Mega-Pixel Fixed (100°)											
Illumination:	20m (1 High-Power IR LED)											
Audio:	Built-in Microphone											
Power Supply:	DC12V/250mA											
I4-33K0AP-28 3K	<table><tr><td>Lens:</td><td>2.8mm Mega-Pixel Fixed (100°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Power Supply:</td><td>DC12V/400mA</td></tr></table>	Lens:	2.8mm Mega-Pixel Fixed (100°)	Illumination:	40m (1 High-Power IR LED)	Audio:	Built-in Microphone	Power Supply:	DC12V/400mA	4 IN 1 FIXED LENS	BUILT-IN MICROPHONE Infra Red	
Lens:	2.8mm Mega-Pixel Fixed (100°)											
Illumination:	40m (1 High-Power IR LED)											
Audio:	Built-in Microphone											
Power Supply:	DC12V/400mA											
I4-33K0AP-MVF 3K	<table><tr><td>Lens:</td><td>2.8-12mm Mega-Pixel Motorized Vari-Focal (103°-38°)</td></tr><tr><td>Illumination:</td><td>40m (1 High-Power IR LED)</td></tr><tr><td>Audio:</td><td>N/A</td></tr><tr><td>Power Supply:</td><td>DC12V/450mA</td></tr></table>	Lens:	2.8-12mm Mega-Pixel Motorized Vari-Focal (103°-38°)	Illumination:	40m (1 High-Power IR LED)	Audio:	N/A	Power Supply:	DC12V/450mA	4 IN 1 MOTORIZED LENS	BUILT-IN MICROPHONE Infra Red	
Lens:	2.8-12mm Mega-Pixel Motorized Vari-Focal (103°-38°)											
Illumination:	40m (1 High-Power IR LED)											
Audio:	N/A											
Power Supply:	DC12V/450mA											



Rainbow 2MP

HD/TVI/CVI/CVBS + PAL/NTSC (DIP Switch)

DV-320AR-36 2MP	<table><tr><td>Lens:</td><td>3.6mm Mega-Pixel Fixed (85°)</td></tr><tr><td>Illumination:</td><td>20m (2 High-Power White LED)</td></tr><tr><td>Audio:</td><td>Built-in Microphone</td></tr><tr><td>Power Supply:</td><td>DC12V/300mA</td></tr></table>	Lens:	3.6mm Mega-Pixel Fixed (85°)	Illumination:	20m (2 High-Power White LED)	Audio:	Built-in Microphone	Power Supply:	DC12V/300mA	4 IN 1 	 	
Lens:	3.6mm Mega-Pixel Fixed (85°)											
Illumination:	20m (2 High-Power White LED)											
Audio:	Built-in Microphone											
Power Supply:	DC12V/300mA											

One Cable, Two Signals

Video & Audio Together

Transmit HD video and audio over a single coaxial cable.

BSV-320AR-36

2MP

Lens:	3.6mm Mega-Pixel Fixed (85°)
Illumination:	20m (2 High-Power White LED)
Audio:	Built-in Microphone
Power Supply:	DC12V/300mA

4 IN 1

FIXED LENS

BUILT-IN MICROPHONE

rainbow
COLOR NIGHT VISION





HD PTZ

Selectable Output (AHD/TVI/CVI/CVBS), CoC Support, IP66, True Day/Night (ICR), 3D-DNR

MZ-10A-2(IR)

2MP

Lens:	x10 (4.7-47mm)
Illumination:	60m Intelligent IR LED
Preset speed:	200°/s
Power Supply:	12VDC/1.5A



ZE-20A-2(IR)

2MP

Lens:	x20 (4.9-97mm)
Illumination:	100m IR LED Array
Preset speed:	12°/s
Power Supply:	DC12V/~1.6A



ZP-20A-2(IR)

2MP

Lens:	x20 (4.9-97mm)
Illumination:	100m IR LED Array
Preset speed:	350°/s
Power Supply:	24VAC/3A





*Still with us? Good.
More solutions ahead.*


DVR systems are the “heart” of any CCTV installation.

All information streamed from the cameras accumulates in the DVR. The DVR captures the video signal coming from the camera, converts and saves it in digital format.

Therefore, the DVR’s quality is as important as the cameras’ when it comes down to the final video resolution. Moreover, since all the recording data is saved and rewritten repeatedly on the DVR, it must be an extremely reliable and high-standard product. Provision-ISR DVRs are designed and manufactured according to researched and practiced knowledge over many years of experience. All DVRs use the advanced H.264-H.265 video compression format to deliver maximum video quality while using minimum storage volume. Provision-ISR DVRs are made of the highest quality components and are adapted to work in a wide range of different conditions and applications. All of our DVRs stand out for their “full feature” operating system with a user-friendly graphical interface running from its powerful processor. Depending on the model, our DVRs include digital VGA and HDMI monitor out, Analogue video out, audio in/out, RS-485 for PTZ control, and alarm in/alarm out sockets.

The range of DVRs is also supported by a robust network function for remote monitoring, complete remote configuration and mobile device application for remote monitoring.




DVR - Model Name Index

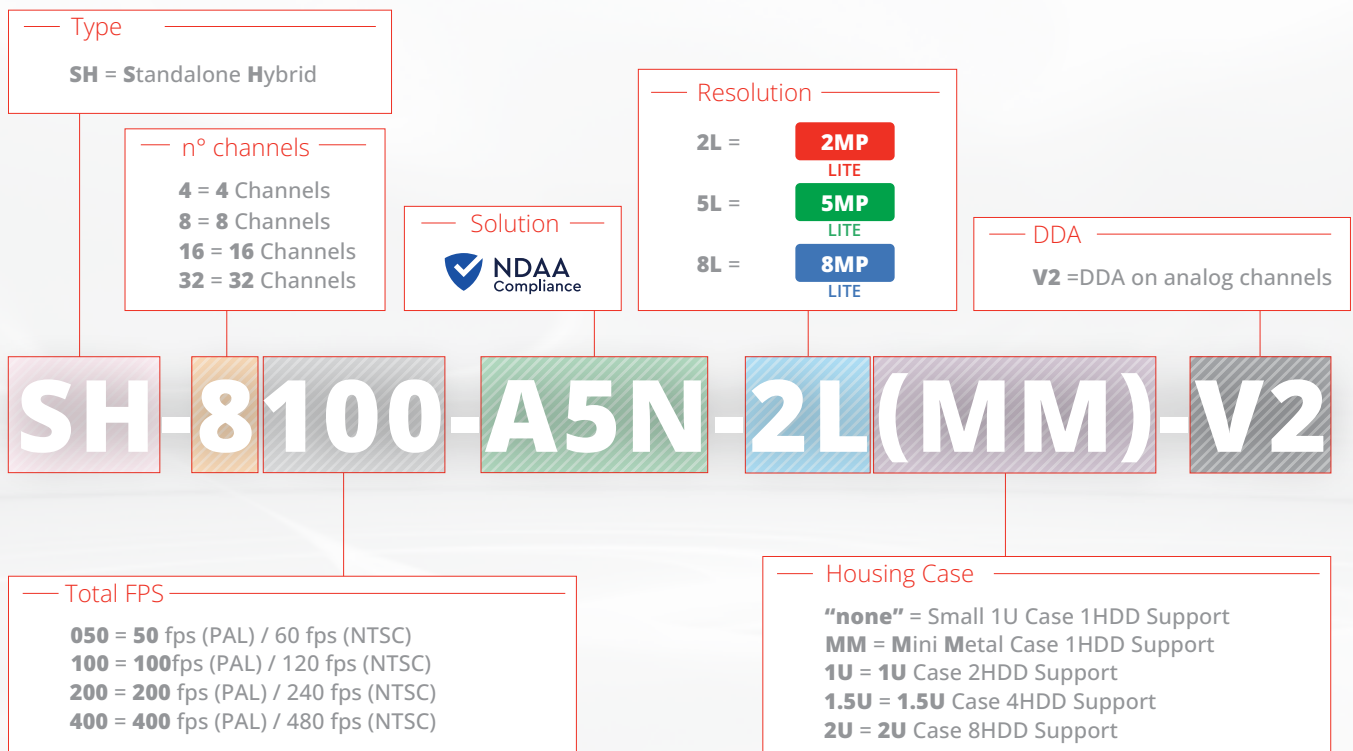

HYBRID DVR

Dynamic hybrid- HD / CVI / TVI / CVBS + IP H.265 dvr. Backup format- AVI/DAT. Equipped with Smart Motion Detection (SMD) Supported pixel base analytic for HD channels- line crossing, sterile area Supported onboard AI analytic- line crossing, sterile area (limited channels) Supported AI analytic for IP cameras- line crossing, sterile area, smart search

HYBRID DVR 4 CHANNELS

SH-4100A5N-2L(MM)-V3 4CH 2MP LITE	<table><tr><td>Hybrid Input:</td><td>4CH Standard BNC + 2CH IP (Over Network)</td></tr><tr><td>Video output:</td><td>HDMI+VGA</td></tr><tr><td>Audio:</td><td>In: 1CH ; Out: 1CH</td></tr><tr><td>Alarm:</td><td>In: IP Cameras only ; Out: IP Cameras only</td></tr><tr><td>Hard Disk:</td><td>1 of 6TB each</td></tr></table>	Hybrid Input:	4CH Standard BNC + 2CH IP (Over Network)	Video output:	HDMI+VGA	Audio:	In: 1CH ; Out: 1CH	Alarm:	In: IP Cameras only ; Out: IP Cameras only	Hard Disk:	1 of 6TB each	 NDAA 4 IN 1 HYBRID DVR AI ENGINE
Hybrid Input:	4CH Standard BNC + 2CH IP (Over Network)											
Video output:	HDMI+VGA											
Audio:	In: 1CH ; Out: 1CH											
Alarm:	In: IP Cameras only ; Out: IP Cameras only											
Hard Disk:	1 of 6TB each											
SH-4050A5N-5L(MM)-V2 4CH 5MP LITE	<table><tr><td>Hybrid Input:</td><td>4CH Standard BNC + 2CH IP (Over Network)</td></tr><tr><td>Video output:</td><td>HDMI+VGA+CVBS</td></tr><tr><td>Audio:</td><td>In: 1CH ; Out: 1CH</td></tr><tr><td>Alarm:</td><td>In: IP Cameras only ; Out: IP Cameras only</td></tr><tr><td>Hard Disk:</td><td>1 of 6TB each</td></tr></table>	Hybrid Input:	4CH Standard BNC + 2CH IP (Over Network)	Video output:	HDMI+VGA+CVBS	Audio:	In: 1CH ; Out: 1CH	Alarm:	In: IP Cameras only ; Out: IP Cameras only	Hard Disk:	1 of 6TB each	 NDAA 4 IN 1 HYBRID DVR AI ENGINE
Hybrid Input:	4CH Standard BNC + 2CH IP (Over Network)											
Video output:	HDMI+VGA+CVBS											
Audio:	In: 1CH ; Out: 1CH											
Alarm:	In: IP Cameras only ; Out: IP Cameras only											
Hard Disk:	1 of 6TB each											
SH-4050A5N-8L(MM)-V2 4CH 8MP LITE	<table><tr><td>Hybrid Input:</td><td>4CH Standard BNC + 2CH IP (Over Network)</td></tr><tr><td>Video output:</td><td>HDMI+VGA+CVBS</td></tr><tr><td>Audio:</td><td>In: 1CH ; Out: 1CH</td></tr><tr><td>Alarm:</td><td>In: IP Cameras only ; Out: IP Cameras only</td></tr><tr><td>Hard Disk:</td><td>1 of 6TB each</td></tr></table>	Hybrid Input:	4CH Standard BNC + 2CH IP (Over Network)	Video output:	HDMI+VGA+CVBS	Audio:	In: 1CH ; Out: 1CH	Alarm:	In: IP Cameras only ; Out: IP Cameras only	Hard Disk:	1 of 6TB each	 NDAA 4 IN 1 HYBRID DVR AI ENGINE
Hybrid Input:	4CH Standard BNC + 2CH IP (Over Network)											
Video output:	HDMI+VGA+CVBS											
Audio:	In: 1CH ; Out: 1CH											
Alarm:	In: IP Cameras only ; Out: IP Cameras only											
Hard Disk:	1 of 6TB each											
SH-4050A5N-8L-V2 4CH 8MP LITE	<table><tr><td>Hybrid Input:</td><td>4CH Standard BNC + 2CH IP (Over Network)</td></tr><tr><td>Video output:</td><td>HDMI+VGA+CVBS</td></tr><tr><td>Audio:</td><td>In: 4CH ; Out: 1CH</td></tr><tr><td>Alarm:</td><td>In: 4+IPC ; Out: 1+IPC</td></tr><tr><td>Hard Disk:</td><td>1 of 10TB each</td></tr></table>	Hybrid Input:	4CH Standard BNC + 2CH IP (Over Network)	Video output:	HDMI+VGA+CVBS	Audio:	In: 4CH ; Out: 1CH	Alarm:	In: 4+IPC ; Out: 1+IPC	Hard Disk:	1 of 10TB each	 NDAA 4 IN 1 HYBRID DVR AI ENGINE
Hybrid Input:	4CH Standard BNC + 2CH IP (Over Network)											
Video output:	HDMI+VGA+CVBS											
Audio:	In: 4CH ; Out: 1CH											
Alarm:	In: 4+IPC ; Out: 1+IPC											
Hard Disk:	1 of 10TB each											


HYBRID DVR 8 CHANNELS

SH-8100A5N-2L(MM)-V3

8CH

2MP
LITE

Hybrid Input:	8CH Standard BNC + 2CH IP (Over Network)
Video output:	HDMI+VGA
Audio:	In: 1CH ; Out: 1CH
Alarm:	In: IP Cameras only ; Out: IP Cameras only
Hard Disk:	1 of 6TB each





NDAA

4 IN 1

HYBRID
DVR

AI
ENGINE

SH-8100A5N-5L(MM)-V2 8CH 5MP LITE	<table><tr><td>Hybrid Input:</td><td>8CH Standard BNC + 4CH IP (Over Network)</td></tr><tr><td>Video output:</td><td>HDMI+VGA+CVBS</td></tr><tr><td>Audio:</td><td>In: 1CH ; Out: 1CH</td></tr><tr><td>Alarm:</td><td>In: IP Cameras only ; Out: IP Cameras only</td></tr><tr><td>Hard Disk:</td><td>1 of 6TB each</td></tr></table>	Hybrid Input:	8CH Standard BNC + 4CH IP (Over Network)	Video output:	HDMI+VGA+CVBS	Audio:	In: 1CH ; Out: 1CH	Alarm:	In: IP Cameras only ; Out: IP Cameras only	Hard Disk:	1 of 6TB each	 NDAA 4 IN 1 HYBRID DVR AI ENGINE
Hybrid Input:	8CH Standard BNC + 4CH IP (Over Network)											
Video output:	HDMI+VGA+CVBS											
Audio:	In: 1CH ; Out: 1CH											
Alarm:	In: IP Cameras only ; Out: IP Cameras only											
Hard Disk:	1 of 6TB each											
SH-8100A5N-5L-V2 8CH 5MP LITE	<table><tr><td>Hybrid Input:</td><td>8CH Standard BNC + 4CH IP (Over Network)</td></tr><tr><td>Video output:</td><td>HDMI+VGA+CVBS</td></tr><tr><td>Audio:</td><td>In: 8CH ; Out: 1CH</td></tr><tr><td>Alarm:</td><td>In: 8+IPC ; Out: 2+IPC</td></tr><tr><td>Hard Disk:</td><td>1 of 10TB each</td></tr></table>	Hybrid Input:	8CH Standard BNC + 4CH IP (Over Network)	Video output:	HDMI+VGA+CVBS	Audio:	In: 8CH ; Out: 1CH	Alarm:	In: 8+IPC ; Out: 2+IPC	Hard Disk:	1 of 10TB each	 NDAA 4 IN 1 HYBRID DVR AI ENGINE
Hybrid Input:	8CH Standard BNC + 4CH IP (Over Network)											
Video output:	HDMI+VGA+CVBS											
Audio:	In: 8CH ; Out: 1CH											
Alarm:	In: 8+IPC ; Out: 2+IPC											
Hard Disk:	1 of 10TB each											
SH-8100A5N-8L(MM)-V2 8CH 8MP LITE	<table><tr><td>Hybrid Input:</td><td>8CH Standard BNC + 8CH IP (Over Network)</td></tr><tr><td>Video output:</td><td>HDMI+VGA+CVBS</td></tr><tr><td>Audio:</td><td>In: 1CH ; Out: 1CH</td></tr><tr><td>Alarm:</td><td>In: IP Cameras only ; Out: IP Cameras only</td></tr><tr><td>Hard Disk:</td><td>1 of 6TB each</td></tr></table>	Hybrid Input:	8CH Standard BNC + 8CH IP (Over Network)	Video output:	HDMI+VGA+CVBS	Audio:	In: 1CH ; Out: 1CH	Alarm:	In: IP Cameras only ; Out: IP Cameras only	Hard Disk:	1 of 6TB each	 NDAA 4 IN 1 HYBRID DVR AI ENGINE
Hybrid Input:	8CH Standard BNC + 8CH IP (Over Network)											
Video output:	HDMI+VGA+CVBS											
Audio:	In: 1CH ; Out: 1CH											
Alarm:	In: IP Cameras only ; Out: IP Cameras only											
Hard Disk:	1 of 6TB each											
SH-8100A5N-8L(1U)-V2 8CH 8MP LITE	<table><tr><td>Hybrid Input:</td><td>8CH Standard BNC + 8CH IP (Over Network)</td></tr><tr><td>Video output:</td><td>HDMI+VGA+CVBS</td></tr><tr><td>Audio:</td><td>In: 8CH ; Out: 1CH</td></tr><tr><td>Alarm:</td><td>In: 8+IPC ; Out: 2+IPC</td></tr><tr><td>Hard Disk:</td><td>2 of 10TB each</td></tr></table>	Hybrid Input:	8CH Standard BNC + 8CH IP (Over Network)	Video output:	HDMI+VGA+CVBS	Audio:	In: 8CH ; Out: 1CH	Alarm:	In: 8+IPC ; Out: 2+IPC	Hard Disk:	2 of 10TB each	 NDAA 4 IN 1 HYBRID DVR AI ENGINE
Hybrid Input:	8CH Standard BNC + 8CH IP (Over Network)											
Video output:	HDMI+VGA+CVBS											
Audio:	In: 8CH ; Out: 1CH											
Alarm:	In: 8+IPC ; Out: 2+IPC											
Hard Disk:	2 of 10TB each											

HYBRID DVR 16 CHANNELS

SH-16200A5N-2L(MM)-V3

16CH

2MP
LITE

Hybrid Input:	16CH Standard BNC + 2CH IP (Over Network)
Video output:	HDMI+VGA
Audio:	In: 1CH ; Out: 1CH
Alarm:	In: IP Cameras only ; Out: IP Cameras only
Hard Disk:	1 of 6TB each



NDAA

4 IN 1

HYBRID
DVR

AI
ENGINE

AI for analog? Believe it!

One channel. Full AI.
DDA™ Analytics on any analog camera.



SH-16200A5N-5L(MM)-V2

16CH
5MP LITE

Hybrid Input:	16CH Standard BNC + 8CH IP (Over Network)
Video output:	HDMI+VGA+CVBS
Audio:	In: 1CH ; Out: 1CH
Alarm:	In: IP Cameras only ; Out: IP Cameras only
Hard Disk:	1 of 6TB each



NDAA
4 IN 1

HYBRID DVR
AI ENGINE

SH-16200A5N-5L(1U)-V2

16CH
5MP LITE

Hybrid Input:	16CH Standard BNC + 8CH IP (Over Network)
Video output:	HDMI+VGA+CVBS
Audio:	In: 8CH ; Out: 1CH
Alarm:	In: 16+IPC ; Out: 4+IPC
Hard Disk:	2 of 10TB each



NDAA
4 IN 1

HYBRID DVR
AI ENGINE

SH-16200A5N-8L(1U)-V2

16CH
8MP LITE

Hybrid Input:	16CH Standard BNC + 8CH IP (Over Network)
Video output:	HDMI+VGA+CVBS
Audio:	In: 8CH ; Out: 1CH
Alarm:	In: 16+IPC ; Out: 4+IPC
Hard Disk:	2 of 10TB each



NDAA
4 IN 1

HYBRID DVR
AI ENGINE

HYBRID DVR 32 CHANNELS

SH-32400A5N-5L(1.5U)-V2

32CH
5MP LITE

Hybrid Input:	32CH Standard BNC + 8CH IP (Over Network)
Video output:	HDMI+VGA+CVBS
Audio:	In: 16C ; Out: 1CH
Alarm:	In: 4+IPC ; Out: 1+IPC
Hard Disk:	4 of 10TB each



NDAA
4 IN 1

HYBRID DVR
AI ENGINE

AI for analog? Believe it!

One channel. Full AI.

DDA™ Analytics on any analog camera.



PRODUCT RANGE ACCESSORIES

The term "ONE STOP SHOP" is the definition that best represents Provision-ISR's offering.

The brand's catalog includes a wide range of accessories to complement the product lineup: test monitors, power supplies, brackets, junction boxes, connectors, baluns, and everything a security professional needs to build and complete a CCTV system.

USB Alarm BOX

IO-1606



Expand the "Alarms" functionality of your device by using our plug-and-play IO-1606 Alarm Box! All you need to do is connect the "box" to your device using the provided USB cable and instantly get 16 Alarm inputs and 6 Alarm outputs!

Specifications

Connectivity	Alarms Input	16 Dry contacts
	Alarms Output	6 Dry contacts
	Connection Interface	Micro USB
	Power supply	5VDC/1A
	Power Consumption	<5W
Housing	Bracket	Wall Mount
	Dimensions	140mmx74mmx29mm
	Weight(gross)	180g
	Work Environment	-10°C~50°C, 10%~90% Humidity

Analog Horn Speaker

PR-HS30W



Featuring digital switching amplifier technology, this horn speaker supports longer cable runs, fewer power supplies, and reliable operation in high ambient temperatures. It connects directly to cameras with audio output and offers easy installation for effective outdoor alerts.

Item	Specifications
Total Harmonic Distortion	5% Max at 1KHz 1W
Speciality	Weather proof Paging horn speaker
Resonance Frequency	700 ± 15%Hz at 1V, 25 °C
Rated Frequency Range	300Hz ~ 5.5K Hz (-20dB band)
Sound Pressure Level	112 ± 3dB 1w/m @ 1K Hz
Power Handling	DC24V-12V,2A
Rub & Buzz Test	285(W) × 205(H)× 280(L)mm
Speaker Weight	2.1kg ± 10%
Material & Finish	Finish: White ; Horn: ABS, Bracket: Stainless Steel
Work Enviroment	Temp -20°C~+40°C, Humidity 45%~85%, Elevation under 1000 m, Dust, corrosive gas or vibration which requires special condition must not exist
Dimensions	285(W) × 205(H)× 280(L)mm
Rated Impedance	ACR 8 Ohm

PR-HS30W
Amplified Horn Speaker
 Your Voice Against Intruders



HDMI Accessories

PR-HDMItoVGA

HDMI to VGA

Converts HDMI to VGA output

- Supports: all HD formats up to 1080P @ 30Hz
- Support HDMI 1.4b
- No support for HDMI audio (Will be lost)
- No power required



PR-HDeX (4K)

HDMI Repeater

It repeats and regenerates an entering HDMI signal and allows a second HDMI cable for a total of 40m (131ft).

- Supports: all HD formats up to 4K @ 30Hz
- Support HDMI 1.4b
- Support up to 40 meters total transmission distance (AWG 26 cable standard)
- 1080P resolution: input up to 15 meters, output up to 25 meters
- 4K resolution: input up to 5 meters, output up to 8 meters
- Note: working distance may be affected by the cable quality and length.
- No power required



PR-SP102 (4K)

Splitter HDMI 1 a 2

It splits a single HDMI input signal into 2 identical output signals.

- Split one HDMI input signal into 2 HDMI output signals
- Support HDMI resolution up to 4K@30Hz
- Support digital audio format: DTS-HD/Dolby-true HD/DTS/Dolby-AC3/DSD/HD(HBR)
- Supported HDMI cable distance: (AWG 26 cable standard)
- 1080P resolution: input up to 15 meters, output up to 15 meters
- 4k resolution: input up to 8 meters, output up to 8 meters
- Note: Working distance may be affected by the cable quality and length.
- DC5V power supply needed (USB Power cable included)



PR-SP104 (4K)

Splitter HDMI da 1 a 4

It splits a single HDMI input signal into 4 identical output signals.

- Separate 1 HDMI in to 4 HDMI out
- Support HDMI resolution up to 4K@30Hz
- Support digital audio format: DTS-HD/Dolby-true HD/ DTS/ Dolby-AC3/ DSD/ HD(HBR)
- Supported HDMI cable distance: (AWG 26 cable standard)
- 1080p resolution: input up to 15 meters, output up to 15 meters
- 4k resolution: input up to 8 meters, output up to 8 meters
- Note: Working Distance may be affected by the cable quality and length
- Include DC5V power supply



PR-SW301 (4K)

HDMI Switcher 3 a 1

It incorporates the connection of 3 HDMI sources into a single HDMI display. After connection, you can select the input manually or automatically by the device.

- Compatible with HDMI 1.4a
- Support up to 4K@30Hz.
- Deep color 12bit per channel
- "Smart switching" function that can detect live HDMI signal in different channels and switch to it automatically
- No power supply required for standard installation. If the HDMI output cable exceeds 5m – a CD5V power supply will be required (Not included)



HDMI Accessories

PR-4IN1-Con

Analogue HD to HDMI/VGA/BNC Converter

It converts the Analogue HD signal to an HDMI/VGA/BNC signal for direct connection to a standard display

- Up to HD 2MP signals (AHD/CVI/TVI/CVBS)
- HDMI output compatible with HDCP, HDMI1.4
- HDMI output resolutions: 720P@50/60Hz, 1080P@50/60Hz
- VGA output resolutions: 800x600@60Hz, 1024x768@60Hz, 1366x768@60Hz, 1280x720@60Hz, 920x1080@60Hz
- Selectable output and resolution by a physical button on the device
- Supports both NTSC/PAL Video inputs –Automatic detection
- Maximum output distance: HDMI: 20 meters, VGA: 5 meters, CVBS: 500 meters



PR-HDoNet-E

HDMI extender su Cat5e/Cat6

It converts the Analogue HD signal to an HDMI/VGA/BNC signal for direct connection to a standard display

- Working distance: up to 10m distance over cat5e cable, up to 20m over Cat6 cable
- HDMI 1.3&3D support
- Support video resolution of up to 1080P@60Hz
- Support format audio: DTS-HD/Dolby-true HD/LPCM7.1/DTS/Dolby AC3/DSD
- Power supply not required



PR-HDoNet+

HDMI extender su Cat5e/Cat6

It converts the Analogue HD signal to an HDMI/VGA/BNC signal for direct connection to a standard display

- Working distance: up to 40m distance over cat5e cable, up to 60m over Cat6 cable
- HDMI 1.3&3D support
- 12Bit deep color and bandwidth of up to 225Mhz support
- Support video resolution of up to 1080P@60Hz
- Supported Audio formats: DTS-HD/Dolby-true HD/LPCM7.1/DTS/Dolby- AC3/DSD
- IR signal transmission (PR-HDoNet(IR) model only)
- DC5V power supply included



PR-HDKVMoNet

Extender HDMI USB KVM su Cat5r/Cat6

It transmits HDMI + USB + IR signals over Ethernet cable

- Working distance: up to 100m distance over cat5e cable, up to 130m over Cat6 cable
- HDMI1.3 & 3D Support
- 12Bit deep color and bandwidth of up to 225Mhz support
- Support video resolution of up to 1080P@60Hz
- Supported Audio formats: DTS-HD/Dolby-true HD/LPCM7.1/DTS/ DolbyAC3/DSD
- Support USB2.0 Keyboard and mouse transmission
- Support IR signal transmission
- DC5V power supplies included



Balun / High power balun

PTR-101V-HD-8

1CH 8MP Video Passive Balun

- Passive transmission - No power required
- 8MP 4in1 support: AHD / CVI /TVI / CVBS.
- Transmission Distance: AHD / CVBS - 200M / CVI / TVI - 150M. •Friendly “Tool Free” Terminal Connector
- Built-in TVS for Surge Protection
- Anti-Static Design
- Wave Filter Design
- Designed for Cat.5e/6 Cables



PTR-102VP-HD-8

1CH 8MP Video + Power Passive Balun

- Passive transmission - No additional power required
- 8MP 4in1 support: AHD / CVI /TVI / CVBS.
- Transmission Distance: AHD / CVBS - 200M, CVI / TVI - 150M
- Friendly “Tool Free” Terminal Connector
- Built-in TVS for Surge Protection
- Anti-Static Design
- Wave Filter Design
- Designed for Cat.5e/6 Cables



PTR-103VHP-HD

1CH HD Balun video + High power

- Passive transmission - No additional power required
- 5MP 4in1 support: AHD / CVI /TVI / CVBS
- Transmission Distance: AHD / CVBS / CVI / TVI- 200M
- Friendly “Tool Free” Terminal Connector
- Built-in TVS for Surge Protection
- High-Power Input: 12-36VDC
- Power output: 12VDC Stable Output
- Anti-Static Design
- Wave Filter Design
- Designed for Cat.5e/6 Cables



Connectors

PR-C01



CONNECTOR
BNC male to RCA female

PR-C03



“T” CONNECTOR BNC
Male to 2 BNC female

PR-C04



CONNECTOR
BNC female to RCA male

PR-C07



CONNECTOR
BNC female to BNC
female

PR-C08



CONNECTOR
DC jack male

PR-C09



CONNECTOR
DC jack female

PR-C10



DC CABLE WITH MALE
JACK 25 cm length

PR-C12



BNC PLUG

PR-C13



BNC PLUG
(one set with three pcs)
for ratchet BNC cramping
tool

PR-C14



DC SPLITTER 1-4

UPS Series

Reliable backup power designed to protect critical systems during outages and power instability.



Power Protection. Done Right.



Power That Fits the Installation

From everyday backup to mission-critical continuity, choose the right UPS for each environment.

Line-Interactive Series (LI)

Standard Backup Protection

Ideal for NVRs, DVRs, routers, workstations, and everyday security installations.

Stabilizes incoming power during normal operation and automatically switches to battery backup within milliseconds during outages.

- Tower Design
- Automatic Voltage Regulation (AVR)
- Simulated Sinewave Output
- Fast Transfer Response

Online Series (OL-RM)

Critical Power Continuity

Designed for servers, IT environments, communication racks, and high-load systems.

Continuously converts and stabilizes power through the UPS, delivering uninterrupted operation with zero transfer time during outages.

- Rackmount Design
- Online Double-Conversion Technology
- Pure Sinewave Output
- Zero Transfer Time

Built for Real-World Applications



Surveillance Systems

Supports surveillance systems, NVRs, and DVR setups during power interruptions.



Networking Equipment

Supports switches, routers, and telecommunications infrastructure.



Control Rooms

Supports continuous monitoring, workstations, and control environments.



Server Environments

Protects servers, IT equipment, and connected infrastructure.



UPS 600LI

Compact and reliable, the UPS 600LI provides essential backup power for small security and network installations. It helps protect connected devices during outages and voltage fluctuations.

Specification Highlights

- 600VA / 360W capacity
- Line Interactive UPS
- 1 × 12V / 7Ah battery
- Simulated sine wave output
- Fast transfer time
- Automatic Voltage Regulation
- Compact desktop design
- LED status indication
- Overload and short-circuit protection
- Ideal for small installations



UPS 1000LI

The UPS 1000LI delivers dependable backup power for medium-sized security systems and network equipment, helping keep critical devices running during outages and unstable power conditions.

Specification Highlights

- 1000VA / 600W capacity
- Line Interactive UPS
- 2 × 12V / 7Ah batteries
- Simulated sine wave output
- Automatic Voltage Regulation
- Fast transfer time
- LED status indication
- Overload and short-circuit protection
- Suitable for NVR and network devices



UPS 2000LI

Built for larger installations, the UPS 2000LI delivers extended backup power for security, networking, and monitoring equipment, helping reduce downtime during unexpected power failures.

Specification Highlights

- 2000VA / 1200W capacity
- Line Interactive UPS
- 2 × 12V / 9Ah batteries
- Simulated sine wave output
- Automatic Voltage Regulation
- Fast transfer time
- LED status indication
- Overload and short-circuit protection
- Supports higher power loads



UPS 1000OL

The UPS 1000OL provides professional online power protection for critical security and network systems, ensuring stable, continuous operation with pure sine-wave output and zero transfer time.

Specification Highlights

- 1000VA / 900W capacity
- Online UPS technology
- Pure sine wave output
- 0ms transfer time
- 3 × 12V / 7Ah batteries
- High efficiency in battery mode
- Rackmount / tower installation support
- LCD display for system status
- Overload and short-circuit protection
- Suitable for sensitive equipment



UPS 2000OL

Designed for demanding installations, the UPS 2000OL provides advanced online protection for security, communications, and IT equipment, with high-output pure sine-wave performance.

Specification Highlights

- 2000VA / 1800W capacity
- Online UPS technology
- Pure sine wave output
- 0ms transfer time
- 4 × 12V / 9Ah batteries
- High efficiency in battery mode
- Rackmount / tower installation support
- LCD display for system status
- Overload and short-circuit protection
- Ideal for professional installations



UPS 3000OL

The UPS 3000OL is built for high-demand security and infrastructure environments, delivering powerful online backup protection with pure sine-wave performance for systems where downtime is unacceptable.

Specification Highlights

- 3000VA / 2700W capacity
- Online UPS technology
- Pure sine wave output
- 0ms transfer time
- 6 × 12V / 9Ah batteries
- High efficiency in battery mode
- Rackmount / tower installation support
- LCD display for system status
- Overload and short-circuit protection
- Designed for high-load systems

Power supplies

PSU-12VDC1A

Power supply 12V 1A

- Stable power signal to support clear images
- Over-current protection
- Short circuit protection



PSU-12VDC3A

Power supply 12V 3A

- Stable power signal to support clear images
- Over-current protection
- Short circuit protection



PSU-12VDC5A

Power supply 12V 5A

- Stable power signal to support clear images
- Over-current protection
- Short circuit protection



PSU-12VDC5A-4

Power supply 12V 1A +4 SPLITTER

- Stable power signal to support clear images
- Over-current protection
- Short circuit protection



PR-5A8CH+

8 CH Power supply

- Output Voltage: DC12V
- Output Current: 5 Amp
- Backup Battery Support: No



PR-5A8CH-B

8 CH Power supply

- Output Voltage: DC12V
- Output Current: 5 Amp
- Backup Battery Support: Si (up to 7Ah)



PR-10A9CH+

9 CH Power supply

- Output Voltage: DC12V
- Output Current: 10 Amp
- Backup Battery Support: No



PR-10A9CH-B

9 CH Power supply

- Output Voltage: DC12V
- Output Current: 10 Amp
- Backup Battery Support: Si (up to 17Ah)



PR-12A16CH+

16 CH Power supply

- Output Voltage: DC12V
- Output Current: 12 Amp
- Backup Battery Support: No



PR-20A16CH (1U)

16 CH Power supply

- Output Voltage: DC12V
- Output Current: 20 Amp
- Backup Battery Support: No



Monitor

PR-IPS7-W

7" TFT Digital Monitor Dual-Input

- | | |
|---|--|
| <ul style="list-style-type: none">• Screen Size: 7" TFT Screen• Resolution: 1024x600• TV System: PAL / NTSC• Power Supply: DC 12V, 1A• Video Input: 1VP-P, 75Ohm• Inputs: AV1, AV2, VGA, HDMI, Power | <ul style="list-style-type: none">• Work Temperature: -10°C ~ 60°C• Viewing Angle: 85° (All Directions)• Contrast Ratio: 300:01:00• Brightness: 320CD/m2• Weight: 0.80Kg• Dimension: 177W x 117H x 15D mm |
|---|--|



PR-IPS10-W

10" TFT Digital Monitor Multi-Input

- | | |
|--|---|
| <ul style="list-style-type: none">• Screen Size 10" TFT Screen• Resolution 1024x600• TV System PAL / NTSC• Power Supply DC 12V, 1A• Video Input 1VP-P, 75Ohm• Inputs AV1, AV2, VGA, HDMI, Power | <ul style="list-style-type: none">• Work Temperature -10°C ~ 60°C• Viewing Angle 85° (All Directions)• Contrast Ratio 300:1• Brightness 350CD/m2• Weight 1.2Kg• Dimension 250W x 163H x 16D mm |
|--|---|



MON-24FHD-BL

24" HD Monitor

- | | |
|--|---|
| <ul style="list-style-type: none">• 24" TFT Liquid Crystal Glass• Screen Ratio: 16:9• LED Back Light• Wide Angle View• 4ms Extremely Fast Response• Vivid Color | <ul style="list-style-type: none">• Ultra Thin Design• HDMI/VGA Inpu• Power Properties: 12V/3A 25W• Angle of View: H 178°/V 178° |
|--|---|



Test Monitor

TM-434in1-8

4.3" TFT LCD Test monitor

- | | |
|---|--|
| <ul style="list-style-type: none">• 8MP 4in1 support: AHD / CVI /TVI / CVBS• Image settings support• 12VDC Output (Plug Supplied)• 5VDC Output (Micro USB Plug Supplied)• Audio in with Built-in Speaker• PAL/NTSC Support | <ul style="list-style-type: none">• Status LED Indicators• Built-In Long-Life Rechargeable Battery• Hands-Free Operation (Arm strap supplied)• Light Weight |
|---|--|



TM-54in1-8

5" TFT LCD Test monitor

- | | |
|---|---|
| <ul style="list-style-type: none">• 8MP 4in1 support: AHD / CVI /TVI / CVBS •• Image settings support• BNC x 1, VGA x 1 Input• 12VDC Output (Plug Supplied)• 5VDC Output (Micro USB Plug Supplied)• Audio in with Built-in Speaker | <ul style="list-style-type: none">• PAL/NTSC Support• Status LED Indicators• Built-In Long-Life Rechargeable Battery• Hands-Free Operation (Arm strap supplied)• Light Weight |
|---|---|



Keyboards

IP-Key02-V2

Keyboard controller for PTZ



IP-Key01-V2

Keyboard controller for PTZ



Lenses

02812DCMP-3 V2

Resolution	3MP				Relative Aperture	1.4±5%
Focal-length	2.8-12mm±5%				Mount	CS
Format	d. 6.6(1/2.7")(MAX)				Focus Range	0.2 m ~ ∞
Angle of View	CMOS	Horizontal	Vertical	Diagonal	Weight	42g
	1/2.5"	/	/	/	Focus	Manual focus and zoom
	1/2.7"	103°-30.8°	74.4°-23.3°	138°-40°	Iris	Auto
	1/3"	91°-28°	67.5°-21.2°	120.8°-36°	Operating Temperature	-20C°~+60C°
	1/4"	73°-23.4°	44.8°-14.8°	87.6°-27.8°	Back Focal-length	6.52mm±0.1



0550DCMP-8

Resolution	8MP				Relative Aperture	F1.4±5%
Focal-length	5-50mm±5%				Mount	CS
Format	d. 7(1/2.7")(MAX)				Focus Range	0.3 m ~ ∞
Angle of View	CMOS	Horizontal	Vertical	Diagonal	Weight	180.8g±5g
	1/2.5"	/	/	/	Focus	Manual
	1/2.7"	49.1°-5.6°	36.5°-4.2°	62.7°-7°	Iris	Auto
	1/3"	44.2°-5.1°	32.7°-3.8°	56°-6.3°	Operating Temperature	-20C°~+60C°
	1/4"	32.7°-3.8°	24.4°-2.8°	41.2°-4.7°	Back Focal-length	7.58mm



Amplified IP Horn Speaker

PR-HS15W-IP

IP ONVIF 15W Outdoor horn speaker
• Max SPL: 113dB • Frequency Response: 300Hz~8KHz • Power: PoE / DC12V • Power Consumption: 15W Max • Protection Rate: IP67 • Dimensions: 225*165*240mm



PR-HS30W-IP

IP ONVIF 30W Outdoor horn speaker
• Max SPL: 120dB • Frequency Response: 350Hz~8KHz • Power: PoE / DC12V • Power Consumption: 30W Max • Protection Rate: IP67 • Dimensions: 285*205*290mm



PR-WS15W-IP

IP ONVIF 15W Indoor horn speaker
• Max SPL: 101dB • Frequency Response: 80Hz~20KHz • Power: PoE / DC12V • Power Consumption: 15W Max • Protection Rate: IP55 • Dimensions: 296*196*157mm



Products compatibility



Brackets and junction box

Products compatibility

Junction boxes

Installation

Model	Junction boxes				Installation			
Dome  Panoramic DPAN2	 PR-WB-A	 PR-DJB14IP66	 PR-JB14IP66	 PR-JB14IP64	Wall B  PR-WB14 PR-B10EX, PR-B20EX PR-B50EX	Ceiling  PR-CB14 PR-B10EX, PR-B20EX PR-B50EX	Pole  PR-B50PB PR-WB14 PR-B50ECB	Corner  PR-B50ECB PR-WB14 PR-WB14
	+	or	+	+	+	Optional	Optional	Optional
Bullet  Panoramic BPAN2	 PR-JB12IP66	 PR-JB12IP64	 PR-WB12	 PR-WB12 PR-B10EX, PR-B20EX PR-B50EX	Ceiling  PR-CB12 PR-B10EX, PR-B20EX PR-B50EX	Pole  PR-B50PB PR-WB12 PR-CB12	Corner  PR-B50ECB PR-WB12 PR-CB12	Corner  PR-WB12 PR-CB12
	+		+	Optional	Optional	Optional	Optional	Optional
Bullet  Bullet I2-Fix / BSV-Fix / BSH-Fix	 PR-JB12IP66	 PR-JB12IP64	 PR-WB12	 PR-WB12 PR-B10EX, PR-B20EX PR-B50EX	Ceiling  PR-CB12 PR-B10EX, PR-B20EX PR-B50EX	Pole  PR-B50PB PR-WB12 PR-CB12	Corner  PR-B50ECB PR-WB12 PR-CB12	Corner  PR-WB12 PR-CB12
	+		+	Optional	Optional	Optional	Optional	Optional
Bullet  Bullet I4-Fix / BMF-Fix / BMH-Fix	 PR-JB12IP66	 PR-JB12IP64	 PR-WB12	 PR-WB12 PR-B10EX, PR-B20EX PR-B50EX	Ceiling  PR-CB12 PR-B10EX, PR-B20EX PR-B50EX	Pole  PR-B50PB PR-WB12 PR-CB12	Corner  PR-B50ECB PR-WB12 PR-CB12	Corner  PR-WB12 PR-CB12
	+		+	Optional	Optional	Optional	Optional	Optional
Bullet  Bullet I6-MWF / BLH-MWF	 PR-JB14IP66	 PR-JB14IP64	 PR-WB14	 PR-WB14 PR-B10EX, PR-B20EX PR-B50EX	Ceiling  PR-CB14 PR-B10EX, PR-B20EX PR-B50EX	Pole  PR-B50PB PR-WB14 PR-CB14	Corner  PR-B50ECB PR-WB14 PR-CB14	Corner  PR-WB14 PR-CB14
	+		+	Optional	Optional	Optional	Optional	Optional
Bullet  Bullet I5PT	 PR-B55JB+	 PR-WB14	 PR-CB14 PR-B10EX, PR-B20EX PR-B50EX	 PR-B50PB	Corner  PR-B50ECB			
	+	+						



Download your
Bracket Matching System

Products compatibility




78 >

Brackets and junction box

Products compatibility

Model

Dome  Dome DH - AD	Wall A  PR-WB-A	IP66  PR-DJB14IP66	IP66  PR-JB14IP66	IP64  PR-JB14IP64	+		+			
					or		or			
Dome  Dome Basic DH / DI	IP66  PR-DJB12IP66	Wall  PR-WB12	Optional  PR-B10EX, PR-B20EX PR-B50EX	Ceiling  PR-CB12	Optional  PR-B10EX, PR-B20EX PR-B50EX	+		or		
						 PR-B42PIB+		 PR-B42PIB+		
Bullet  Bullet Basic BSH / I2	IP66  PR-JB12IP66	IP64  PR-JB12IP64	Wall  PR-WB12	Optional  PR-B10EX, PR-B20EX PR-B50EX	Ceiling  PR-CB12	Optional  PR-B10EX, PR-B20EX PR-B50EX	+		or	
							 PR-B42PIB+		 PR-B42PIB+	
Doorbell  Doorbell DB-320WIPN	Wall A  PR-JB1-DB	IP66  PR-JB1-DB	Wall B  PR-WB15-DB	Wall C  PR-WB15-DB	Wall  PR-WB12	Optional  PR-B10EX, PR-B20EX PR-B50EX	+		or	
							 PR-WB15-DB		 PR-WB15-DB	
Intercom  Intercom INT-320WIPN	Wall  PR-WJB-INT	In-Wall  PR-WJB-INT	In-Wall  PR-WJB-INT	In-Wall  PR-WJB-INT	In-Wall  PR-WJB-INT	In-Wall  PR-WJB-INT	+		or	
							 PR-WJB-INT		 PR-WJB-INT	
Monitor  MON-TCH7	In-Wall  PR-WJB-MON7	In-Wall  PR-WJB-MON7	In-Wall  PR-WJB-MON7	In-Wall  PR-WJB-MON7	In-Wall  PR-WJB-MON7	In-Wall  PR-WJB-MON7	+		or	
							 PR-WJB-MON7		 PR-WJB-MON7	



Download your
Bracket Matching System

Ossia VMS

Dedicated Hardware

Provision-ISR Ossia VMS is an advanced and reliable software designed for CCTV systems featuring multiple devices that are controlled from a Single reliable platform.

Ossia VMS comes with dedicated VMS hardware that are planned, designed, and built by Provision-ISR, with the sole purpose of running the video management software while dedicating 100% of the system resources to the task.

OC-MSCL-S(DT)-V2

Client / Managment server

So Small. So powerful.

OC-MSCL-S(DT)-V2 server/workstation is mainly developed for small to medium-Sized security systems.

Provision-ISR delivers a winning solution to the field of security with designated hardware that runs embedded Ossia VMS.

This design makes the system far more stable, cost-worthy, and Simple to use. As a result, the device is fully dedicated to its task – CCTV management and operation.

Main Features

- 256 Channel support
- 64 Recorder support
- 8GB DDR RAM
- Live View and Playback
- E-Map Monitoring
- Analytics Support
- ONVIF Camera Support
- Auto Report Service Support
- PTZ Support
- Audio Support
- Alarm Support
- Mobile App Support

OC-MS-M(1U)

Management server

Provision-ISR's new management server makes a firm base for more extensive security systems to deal with the most demanding tasks.

Combining high performances and embedded Ossia VMS on the one hand and the ability to manage up to 512 channels on the other, the OC-MS-M(1U) makes a stable and robust solution for most security needs.

Main Features

- Pre-installed OSSIA VMS (Server + Client)
- 512 Channels license included
- Full WEB interface
- Total of 256 PC Clients / Mobile App Clients
- Up to 512 channels!
- Storage server compatibility
- Set & view AI analytics
- Face database management
- Fisheye special views support
- LPR Monitoring
- User Management
- Map support (including google maps)
- Decoder support
- Audio broadcast

OC-MS-XL(1U)-V2

Management server

Provision-ISR's new management server is designed to deal with the most demanding tasks and makes a firm base for more extensive security systems.

Combining high performances and embedded Ossia VMS on the one hand and the ability to manage up to 3K channels on the other, the OCMS-XL(1U) makes a stable and commanding solution for most security needs.

Main Features

- Pre-installed Ossia VMS (Server + Client)
- 512 Channels license included
- Full WEB interface
- Total of 256 PC Clients / Mobile App Clients
- Up to 3,000 channels!
- Storage server compatibility
- Set & view AI analytics
- Face database management
- Fish-eye special views support
- LPR Monitoring
- User Management
- Map support (including google maps)
- Decoder support
- Audio broadcast



Ossia VMS

Dedicated Hardware

OC-RS-16(3U)

Storage server

Maximum stability, reliability, and capacity

OC-RS-16(3U) has 16 Hot-Swap HDD trays, RAID capabilities, dual Ethernet, and a power supply.

Provision-ISR's Storage Server was planned, designed, and built for the sole purpose of storing massive amounts of data and keeping it as safe and redundant as it can be.



Main Features

- Data capacity increase - allows for a remarkable increase of playback history.
- Redundancy - thanks to RAID5, the data on the disks will be secured against disk faults and errors.
- Flexibility - hot-swap disk trays for fast disk insertion and removal.
- Dual PSU (power supply unit) - one is for backup in case of an electric failure.

DEC-0104N(1U)

Decoder

Provision-ISR DEC-0104(1U) decoder makes the difference when it comes to durability. The decoder can display up to 144 channels on four separate screens, taking the most resource-demanding task from the client – to itself.

The client is free to deal with the CCTV unexpected tasks such as handling events, playback, alarms, Etc.

Each of the 144 windows is dynamic: the user can choose to use it as a live window, playback window, or an alarm pop-up window!



Main Features

- 4 HDMI Output (Total)
- 2 x 4K Screen Output
- 1 HDMI Input
- Audio Support
- Live View
- Alarm Popup View
- Playback View
- PTZ control
- Up to 8MP Decoding

IP-KEY02 V2

Keyboard

Much more than a Simple accessory

Provision-ISR IP-KEY-02 keyboard is an excellent addition for control rooms, headquarters, or surveillance rooms.

It allows the control of numerous Decoders and IP PTZ cameras and the choice of the camera layout you want by a Single button press.

The operator can easily display up to 144 different channels located on four screens connected to the decoder and fully control IP PTZ cameras for a quick focus on a specific object in the scene.



Main Features

PTZ CAMERAS (IP ONLY)

- Total movement control
- Preset
- Cruise

DECODERS

- Layout control
- Live view
- Playback
- Alarm window
- PTZ control (IP and Analogue)
- Sequencing channels

CaseStudy



High voltage pole security

Innovative solution security system based on a Cellular modem and a solar panel. Used also on farms and remote sites



V.A.R. Portugal

High performance and reliability



FACE RECOGNITION NEW ZELAND POLICE

Law enforcement standard Privacy and cyber security



Advanced anti theft thecnology

Crime prevention



Hotel Marriot – Costa Rica

Worldwide presence in large projects



Aircraft security


Governmental grade Sensitive locations A tailor-made solution

Together is power

At Provision-ISR, collaboration is at our core.


We go beyond by providing full-scale technical and marketing support, forging seamless integrations with other industry leaders. Together, we navigate every challenge, ensuring shared success in a landscape of innovation and partnership.

Our Offices

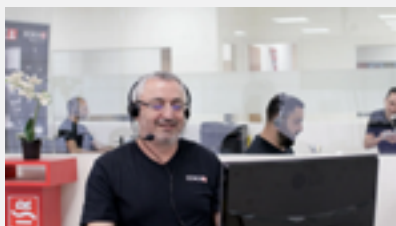

Israel

11 Atir Yeda Street, Kfar Sava, Israel.
Postal Code: 4464310
+972 9 741 7511

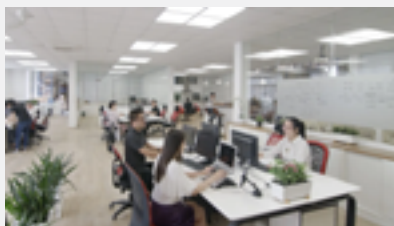

China

Rm 102, Building B, Fuhai Technology
Industrial Park, Yongfu Road, Fuyong Town,
Bao'an District, Shenzhen City, China.
Postal Code: 518103
+86 755 26861420



Italy

71 Einstein Albert Street
52100 Arezzo (AR), Italy
+39 0575 382687

Our Logistic Warehouses




China

Rm 102, Building B, Fuhai Technology
Industrial Park, Yongfu Road, Fuyong Town,
Bao'an District, Shenzhen City, China.
Postal Code: 518103
+86 755 26861420



America

ILS Cargo
11459 NW 122nd Street
Medley, Florida, USA
Postal Code: FL 33178

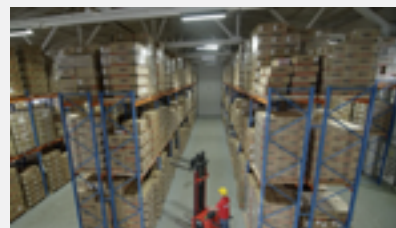

Europe

Harnaschdreef 12
2635 BT Den Hoorn
Netherlands

Stay connected!



Coffee. Tea. A short webinar.

Scan the QR code and explore Provision-ISR solutions at your own pace.





Provision-ISR

11 Atir Yeda St, Kfar Saba, Israel
Postal Code: 4442510
Tel: (972-9) 741 7511
Fax: (972-9) 745 7182
www.provisionisr.com