


DS-KH6210(L) Video Intercom Indoor Station

Key Features

- Video intercom function
- Remote unlocking function
- Resident-to-resident video call
- Live view of HD video
- Voice message function
- Auto-respond and no disturbing mode
- Noise suppression and echo cancellation
- 2-ch zone alarm and SOS calling function
- Physical buttons operation
- Community notice
- Convenient installation with the bracket, batch configuration, and power over video/audio distributor (DS-KAD606, DS-KAD612)



Typical Application

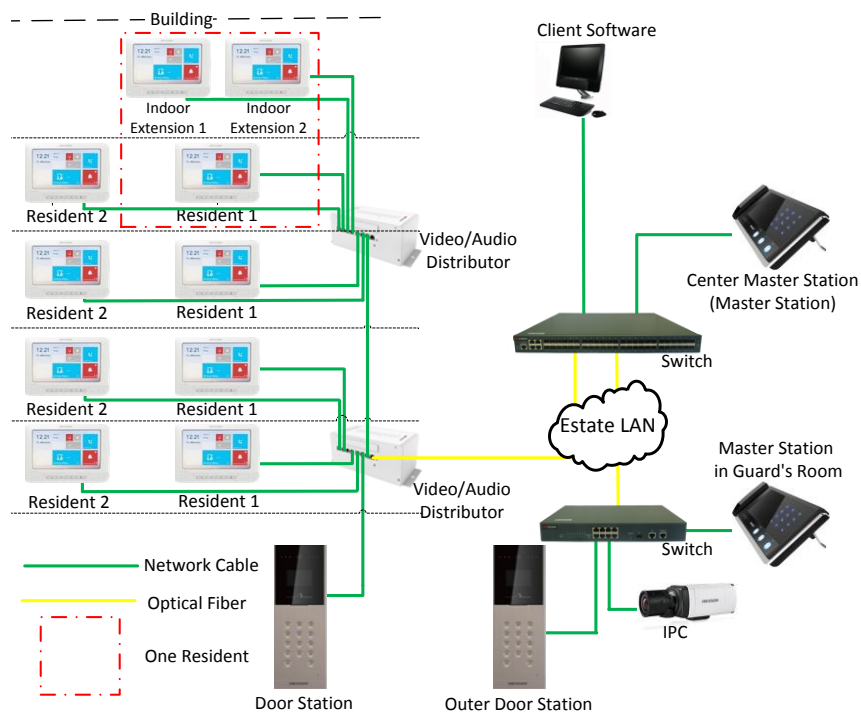


Specifications

Model		DS-KH6210(L)
System parameters	Processor	High-Performance Embedded SOC Processor
	Operation system	Embedded Linux Operation System
Display parameters	Display screen	7-Inch Colorful TFT LCD
	Display resolution	800 × 480
	Operation method	Physical Button
	Operation interface	Flattened UI Operation Interface
Audio parameters	Audio input	Built-in Omnidirectional Microphone
	Audio output	Built-in Loudspeaker
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
	Audio quality	Noise Suppression and Echo Cancellation
Network parameters	Ethernet	10M/100M Self-Adaptive Ethernet
	Network protocol	TCP/IP, SNMP, SIP, RTSP
Alarm parameters	Alarm input	2-ch Alarm Input Sensor
Device interfaces	Network interface	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface
General	Power supply	24 VDC, Power Over Network Cable (DS-KAD606, DS-KAD612)
		12 VDC
	Power consumption	≤10 W
	Working temperature	-10° C to + 55° C (14° F to 131° F)
	Working humidity	10% to 90%
	Dimensions (L × W × H)	195.8 mm × 132.8 mm × 17.5 mm (7.7" × 5.2" × 0.7")
	Certification	FCC, IC, CE, C-TICK, ROHS, REACH, WEEE

Available Model

DS-KH6210(L)

Physical Interfaces

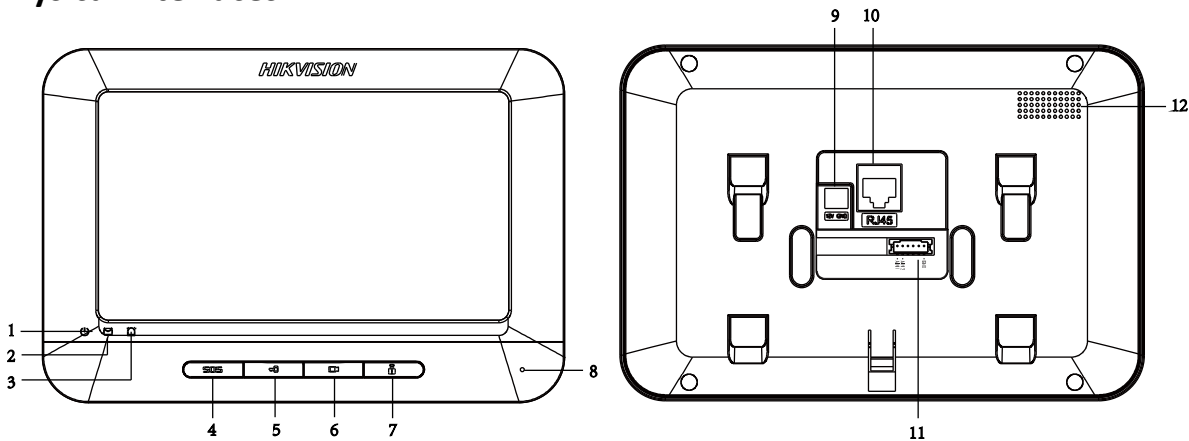

Index	Description		Index	Description	
1	Power Supply Indicator		7	Management Center Key (hold down)	Confirm key (press)
2	Information Indicator		8	Microphone	
3	Alarm Indicator		9	12 VDC Power Supply	
4	SOS Key (hold down)	Return Key (press)	10	Network Interface	
5	Unlock Key (hold down)	Direction Keys ▲ and ◀ (press)	11	Terminals and Interfaces of Cables	
6	Live View Key (hold down)	Direction keys ▼ and ▶ (press)	12	Loudspeaker	

Distributed by

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com