

## DS-2CC52D9T-AITZE 2MP Ultra Low-Light PoC Dome Camera



### Key Features

- 2.0 megapixel progressive scan CMOS
- Analog HD output, up to 1080p resolution
- 2.8 to 12 mm motorized vari-focal lens
- OSD menu
- 120 dB true WDR
- Semi-auto focus
- EXIR 2.0, up to 40 m IR distance
- 1 alarm in/out
- PoC
- Up the Coax (HIKVISION-C)



## Specification


<b>Camera</b>	
Image Sensor	2.0 megapixel progressive scan CMOS
Signal System	PAL/NTSC
Effective Resolution	1920 (H) × 1080 (V)
Frame Rate	PAL: 1080p@25fps NTSC: 1080p@30fps
Min. Illumination	0.003 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s NTSC: 1/30 s to 1/50,000 s
Slow Shutter	Max.: 30 times
Lens	2.8 mm to 12 mm
Horizontal Field of View	32.1° to 98°
Lens Mount	Φ14
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 340°, Tilt: 0° to 75°, Rotate: 0° to 355°
Synchronization	Internal synchronization
WDR	> 120 dB
<b>Menu</b>	
AGC	Support
Day/Night Mode	Auto/Color/BW (White & Black)
White Balance	ATW/AWC-SET/MANUAL
Privacy Mask	ON/OFF, 8 programmable privacy masks
Motion	4 programmable motion areas
Backlight Compensation	WDR/BLC/HLC/OFF
2D & 3D DNR	ON/OFF
Voltage Detection	Support
Functions	Defog, Mirror, Defective Pixel Correction, Sharpness, Camera Title
Scene	Indoor/outdoor/indoor1/low light
<b>Interface</b>	
Video Output	1 HD analog output/1 Vp-p composite output (75Ω/BNC)
Alarm	1 alarm in/out
<b>General</b>	
Operating Conditions	-40° C to 60° C (-40° F to 140° F), humidity: 90% or less (no condensation)
Power Supply	24 V AC/12 V DC ±30%/PoC.at
Power Consumption	Max.: 6 W
IR Distance	Up to 40 m
Communication	Up the coax, Protocol: HIKVISION-C
Dimensions	Φ 136 mm × 101.9 mm (5.35" × 4.01")
Weight	Approx. 800 g (1.76 lb.)

## Order Model

DS-2CC52D9T-AITZE

\* PoC function is only available when cooperating with DS-1TPXXX.

## Dimensions

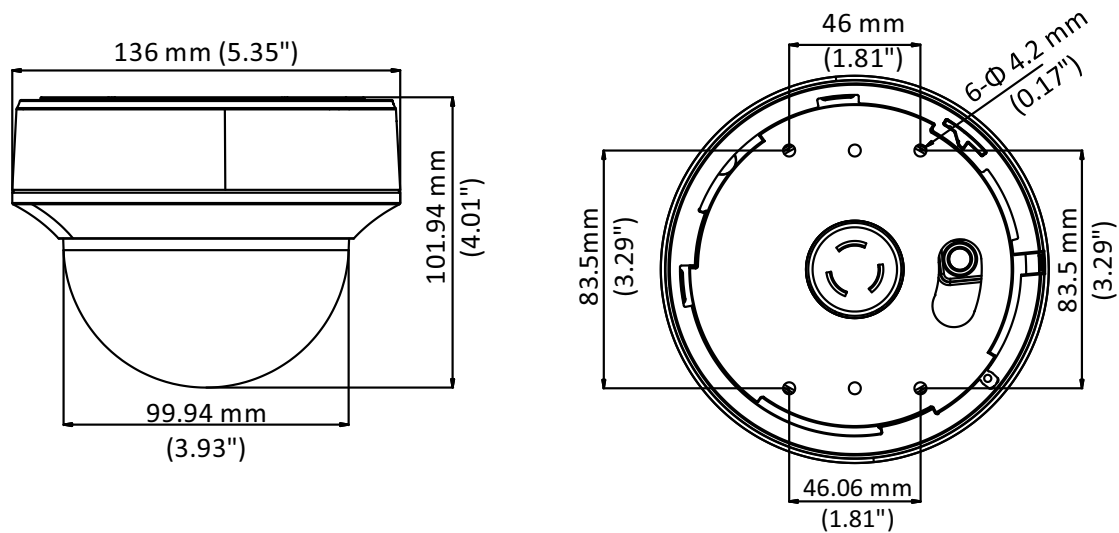

## Accessories



DS-1271ZJ-130  
Pendant Mounting Bracket



DS-1273ZJ-130  
Wall Mounting Bracket



DS-1249ZJ  
In-Ceiling Mounting Bracket



DS-1240ZJ  
Vertical Pole Mounting Bracket

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)11-85-330-444  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com