

# QND-7082R

4MP Network IR Dome Camera



## Key Features

- Max. 4MP resolution, Up to 30fps
- Color : 0.1Lux (F1.6, 1/30sec), B/W : 0Lux (IR LED On)
- 3.2 ~ 10mm (3.1x) motorized varifocal lens
- IR viewable length: 20m (65.62ft)
- Day & Night (ICR), WDR (120dB)
- H.265, H.264, MJPEG, Multiple streaming supported
- Motion detection, Tampering, Defocus detection
- Hallway view (90°/270°), LDC support
- Micro SD/SDHC/SDXC memory 1 slot (Max. 128GB)

## Compatible Accessories (Optional)



SBP-300HMW7



SBP-120WMW



SBP-300WMW



SPB-INW12



SPG-IND12B



SBP-300WM1



SBP-300KMW



SBP-300PMW



SBP-300BW



SBP-300CMW



SBP-300LMW



SBP-300NBW

<b>Video</b>	
Imaging Device	1/3" CMOS
Resolution	2560x1440, 1920x1080, 1280x960, 1280x720, 800x600, 800x448, 720x576, 720x480, 640x480, 640x360, 320x240
Max. Framerate	H.265/H.264 : Max. 30fps at 4M all resolutions, MJPEG : Max. 15fps
Min. Illumination	Color : 0.1Lux (F1.6, 1/30sec) B/W : 0Lux (IR LED On)
Video Out	CVBS : 1.0 Vpp/75Ω composite, 720x480(N), 720x576(P) for installation
<b>Lens</b>	
Focal Length (Zoom Ratio)	3.2~10mm(3.1x) motorized varifocal
Max. Aperture Ratio	F1.6(Wide) ~ F2.9(Tele)
Angular Field of View	H : 98.6(Wide) ~ 30.8(Tele), V : 52.3(Wide) ~ 17.3(Tele), D : 115.7(Wide) ~ 35.3(Tele)
Focus Control	Simple focus
<b>Pan / Tilt / Rotate</b>	
Pan / Tilt / Rotate Range	0°~350° / 0°~67° / 0°~355°
<b>Operational</b>	
Camera Title	Displayed up to 85 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, WDR, SDR
Wide Dynamic Range	120dB
Digital Noise Reduction	SSNR
Motion Detection	4ea, polygonal zones
Privacy Masking	6ea, rectangular zones
Gain Control	Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor
LDC	Support
Electronic Shutter Speed	Minimum/Maximum/Anti flicker (1/5~1/12,000sec)
Video Rotation	Flip, Mirror, Hallway view(90°/270°)
Analytics	Defocus detection, Directional detection, Motion detection, Enter/Exit, Tampering, Virtual line
Alarm I/O	Input 1ea / Output 1ea
Alarm Triggers	Analytics, Network disconnect, Alarm input
Alarm Events	File upload via FTP and e-mail, Notification via e-mail, SD/SDHC/SDXC or NAS recording at event triggers, Alarm output, Handover
Audio In	Built-in MIC
IR Viewable Length	20m (65.62ft)
<b>Network</b>	

<b>Ethernet</b>	RJ-45 (10/100BASE-T)
<b>Video Compression</b>	H.265/H.264 : Main/High, MJPEG
<b>Audio Compression</b>	G.711 u-law / G.726 Selectable G.726(ADPCM) 8KHz, G.711 8KHz, G.726 16Kbps, 24Kbps, 32Kbps, 40Kbps
<b>Smart Codec</b>	Manual (5ea area), WiseStream II
<b>Bitrate Control</b>	H.264/H.265 : CBR or VBR MJPEG : VBR
<b>Streaming</b>	Unicast (6 users) / Multicast Multiple streaming (Up to 3 profiles)
<b>Protocol</b>	IPv4, IPv6, TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP, Bonjour, LLDP
<b>Security</b>	HTTPS(SSL) Login Authentication Digest Login Authentication IP Address Filtering User access Log 802.1X Authentication
<b>Application Programming Interface</b>	ONVIF Profile S/G/T, SUNAPI (HTTP API)

### General

<b>Webpage Language</b>	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
<b>Edge Storage</b>	Micro SD/SDHC/SDXC 1slot 128GB
<b>Memory</b>	512MB RAM, 256MB Flash

### Environmental & Electrical

<b>Operating Temperature / Humidity</b>	-10°C~+55°C (+14°F~+131°F) / Less than 95% RH
<b>Storage Temperature / Humidity</b>	-30°C~+60°C (-22°F~+140°F) / Less than 95% RH
<b>Input Voltage</b>	PoE(IEEE802.3af, Class3), 12VDC
<b>Power Consumption</b>	PoE: Max 8.6W, typical 6.3W 12VDC: Max 7.6W, typical 5.4W





### Mechanical

<b>Color / Material</b>	White / Plastic
<b>RAL Code</b>	RAL9003
<b>Product Dimensions / Weight</b>	Ø119.8 x 98.8mm (Ø4.72 x 3.89"), 320g (0.705 lb)

### DORI (EN62676-4 standard)

<b>Detect (25PPM/ 8PPF)</b>	Wide: 27m(89.86ft) / Tele: 129m(422.61ft)
<b>Observe (63PPM/ 19PPF)</b>	Wide: 11m(35.95ft) / Tele: 52m(169.04ft)
<b>Recognize (125PPM/ 38PPF)</b>	Wide: 6m(17.97ft) / Tele: 26m(84.52ft)
<b>Identify (250PPM/ 76PPF)</b>	Wide: 3m(8.99ft) / Tele: 13m(42.26ft)

- The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

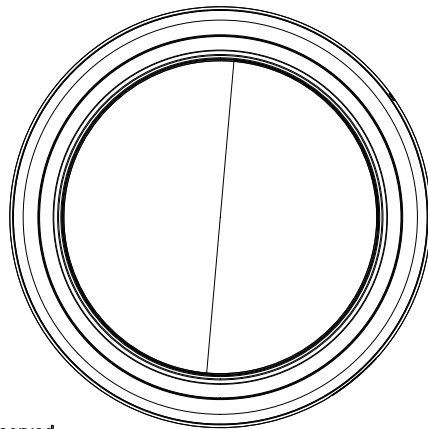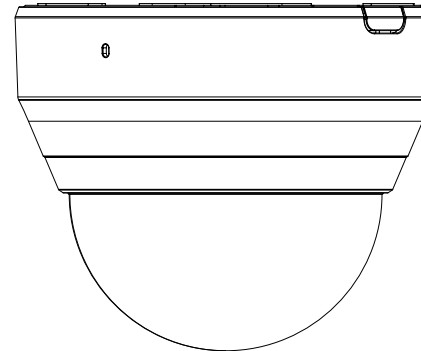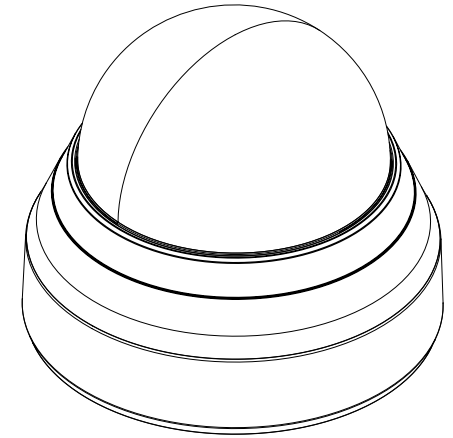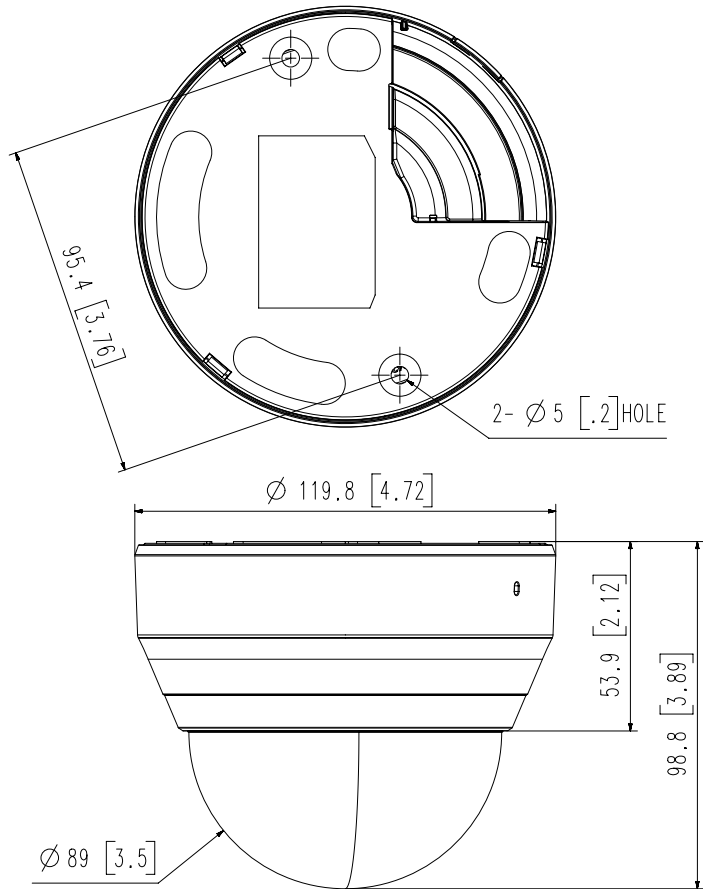

5	QND-7082R	'21.06.03
4	LND-6072R	'19.10.22
3	QND-6072R/6073R/6082R/6083R	'19.10.22
2	LND-6070R/6071R	'19.10.22
1	QND-6070R/6071R/7080R/7081R	'19.10.22
No.	MODEL NAME	DATE
Unit:mm[inch] SCALE:1/1		Hanwha Techwin

© Hanwha Techwin Co.,Ltd. All rights reserved.

A2