

DS-D60C-B

Information Distribution Box



Main Features

- **Variable Materials**

Supports static and dynamic materials, including the application, pictures, audio, video, PDF, streaming media, webpage, live video, third-party data, etc.

- **Flexible Program Schedule**

- Supports free schedule and district display of multiple materials.
- Supports variable display modes: display by day, display by week, custom display, etc.

- **Centralized Management**

Remotely control and manage one or more screens, such as timed startup/shutdown, timed brightness/volume, and screenshot previewing.

- **Organization Feature**

5-level organization is available for managing materials, programs, terminals, and users.

- **Multilevel User Permission**

Supports creating custom users, and allocating permission for users according to user level.

- **Multiple Security Safeguards**

- 3-level check of materials, programs, and schedules to prevent mistake release.
- Screensaver to secure safe for broadcast contents.
- Encryption of data storage and transmission to avoid data tampering.

- **Arbitrary Direction Remote Control**


The remote control, adopting wireless communication in 433 MHz, can control the information distribution box in arbitrary direction.




Specifications

Model		DS-D60C-B
Resolution		1920x1080p@30Hz, 1920x1080p@50Hz, 1920x1080p@60Hz, 1280x720p@30Hz, 1280x720p@50Hz, 1280x720p@60Hz, 3840x2160p@30Hz, 3840x2160p@50Hz, 3840x2160p@50Hz (YCbCr420), 3840x2160p@60Hz, 3840x2160p@50Hz (YCbCr420)
Echo cancellation		No
Interface	HDMI OUT	1-ch
	AUDIO IN	1-ch
	AUDIO OUT	1-ch
	LAN	1
	USB	2 x USB 2.0 interface
	TF Card Slot	1
Power		12 VDC, 2 A
Working consumption		≤ 20 W
Standby consumption		≤ 1 W
Working temperature		0 °C to 50 °C (32 °F to 122 °F)
Working humidity		10 % to 90 %
Wired network		1000 M/100 M self-adaptive
Wireless network		Wi-Fi 802.11b/g/n
Bluetooth		Bluetooth 4.0
Dimension	Without package	145 mm x 145 mm x 31.89 mm (5.7" x 5.7" x 1.3")
	With package	188 mm x 176 mm x 101 mm (7.4" x 6.9" x 4.0")
Weight	Net weight	0.6 kg (1.3 lb.)
	Rough weight	0.65 kg (1.4 lb.)
Built-in system	Chip	RK 3288
	CPU	4-core Cortex-A17
	GPU	Mali T764
	Operating memory	2 GB
	Internal memory	8 GB (EMMC), TF Card 32 GB
	Operating system	Android 6.0.1
Accessory		Power Adaptor, Battery, Remote Control, CD-ROM

Appearance

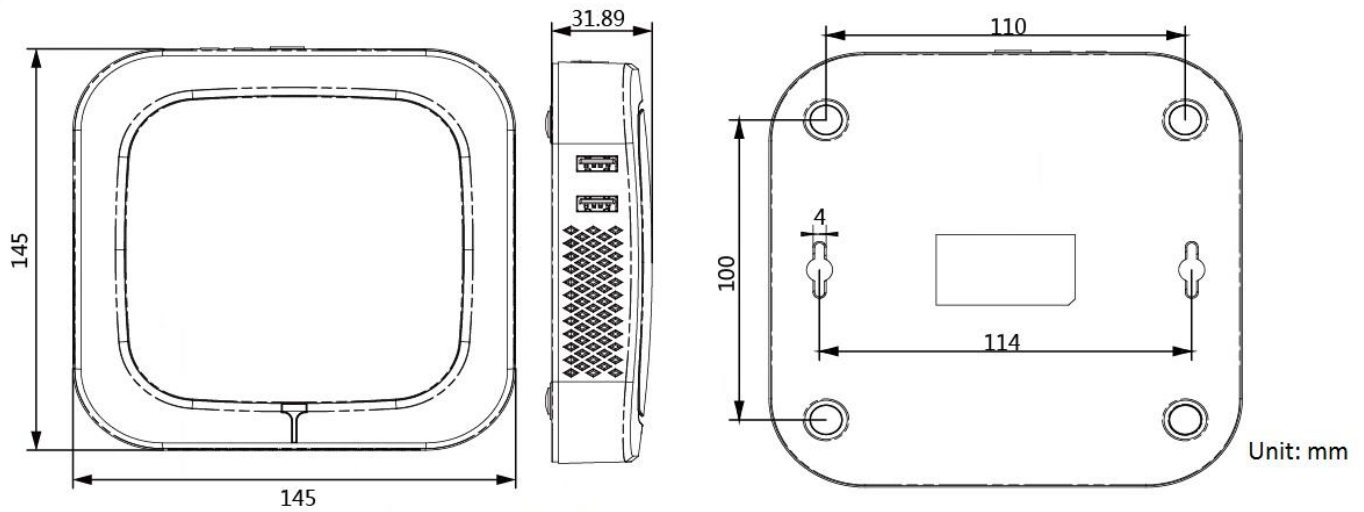

Physical Interfaces

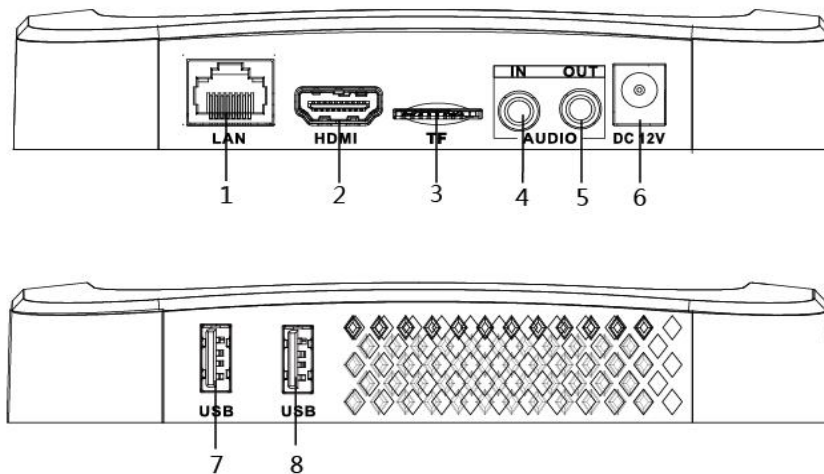

No.	Interface	Description
1	LAN	Network interface
2	HDMI	HDMI video output interface
3	TF	TF card slot
4	AUDIO IN	Audio input
5	AUDIO OUT	Audio output
6	DC 12V	Power interface
7	USB	USB 2.0 interface
8	USB	USB 2.0 interface

Available Model

DS-D60C-B

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia

T +61-2-8599-4233
salesau@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada

T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand

T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil

T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey

T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia

T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland

T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France

T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan

T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam

T +84-974270888
sales.vt@hikvision.com

Hikvision UAE

T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore

T +65-6684-4718
sg@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong

T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland

T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia

T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com