

# EA900Pro RT

1KVA ~ 3KVA  
PF 0.9



## Features


- High frequency on-line double conversion technology
- DSP (Digital signal processors) control technology
- Active power factor correction (APFC), input power factor up to 0.99
- Output power factor 0.9
- Wide input voltage range (110V ~ 300Vac) and frequency range (40 ~ 70Hz)
- Auto sensing frequency
- 50/60Hz frequency conversion
- Cold start
- Rear ventilation design and variable speed fan
- Effective software and hardware protection
- Quick and stable charging, 90% capacity restored in 3 h (standard model UPS)
- Linear derating in low voltage input reducing battery discharging times
- Settable delayed start when power is restored
- Advanced battery management (ABM)
- Multiple functions settable via LCD: output voltage, EOD, auto-start, bypass mode, ECO mode and frequency conversion mode
- Multi-platform communications: RS232 (standard), USB / RS485 / SNMP / dry contacts (optional)

## Available Options


- Optional USB, RS485 card, AS400 dry contacts, SNMP card, SMS alarms, EPO function, MBS (External maintenance bypass switch)

## Rear Panel

1. Overcurrent Protection
2. AC Input
3. Modem/Tel/Fax
4. DC Input
5. Outlet
6. FAN
7. RS232
8. EPO (optional)
9. USB (optional)
10. Intelligent Slot



Optional sockets

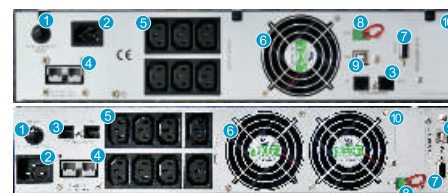

## Specifications

MODEL	EA901PSRT	EA901PHRT	EA902PSRT	EA902PHRT	EA903PSRT	EA903PHRT				
Capacity	1 KVA / 900 W		2 KVA / 1800 W		3 KVA / 2700 W					
<b>INPUT</b>										
Rated voltage	208 V / 220 V / 230 V / 240 Vac									
Voltage range	110 ~ 176 Vac ( linear derating between 50% and 100% load ); 176 ~ 280 Vac (no derating); 280 ~ 300 Vac (derating 50%)									
Frequency	40 ~ 70 Hz (auto-sense)									
Power factor	≥ 0.99									
Bypass voltage range	-25% ~ +15% (settable)									
<b>OUTPUT</b>										
Voltage	208 V / 220 V / 230 V / 240 Vac (settable via LCD)									
Voltage regulation	± 1%									
Frequency	45 ~ 55 Hz or 55 ~ 65 Hz (synchronized range); 50 / 60 Hz ± 0.1 Hz (battery mode)									
Waveform	Sinusoidal									
Crest factor	3:1									
Harmonic distortion	≤ 2% (linear load); ≤ 5% (non-linear load)									
Transfer time	Mains mode to battery mode: 0 ms Inverter mode to bypass mode: 4 ms (typical)									
Overload capability	105% ~ 125%: transfer to bypass in 1 min; 125% ~ 150%: transfer to bypass in 30 s; > 150%: transfer to bypass in 300 ms									
<b>EFFICIENCY</b>										
Mains mode	≥ 90%		≥ 91%		≥ 92%					
Battery mode	≥ 85%		≥ 86%		≥ 87%					
ECO mode	≥ 95%		≥ 96%		≥ 97%					
<b>BATTERIES</b>										
DC voltage	24 V	36 V	36 V	48 V	72 V	72 V	72 V	96 V	96 V	
Inbuilt battery	2 × 9 Ah	3 × 7 Ah	/	4 × 9 Ah	6 × 7 Ah	/	6 × 9 Ah	8 × 7 Ah	/	
Charging current (max.)	1 A		6 A		1 A		6 A		6 A	
Recharge time	8 h									
<b>ALARMS</b>										
Utility failure	4 s per beep									
Low battery	1 s per beep									
Overload	1 s twice beep									
UPS fault	Long beep									
<b>COMMUNICATIONS</b>										
RS232 (standard) / USB (optional)	Supports Windows® 98 / 2000 / 2003 / XP / Vista / 2008 / Windows® 7 / 8 / 10									
SNMP (optional)	Power management from SNMP manager and web browser									
<b>OTHERS</b>										
Operating temperature	0 ~ 40°C									
Relative Humidity	0 ~ 90% (non-condensing)									
Noise level	≤ 50 dB (1m)									
Dimensions (W × D × H) (mm)	440 × 468 × 88		440 × 658 × 88		440 × 468 × 88 (UPS) 440 × 440 × 86 (BAT)		440 × 468 × 88			
Packaged dimensions (W × D × H) (mm)	545 × 592 × 198		545 × 782 × 198		545 × 592 × 198 (UPS) 590 × 580 × 200 (BAT)		545 × 592 × 198			
Net weight (kg)	12.26	13.78	7.58	22.73	25.86	9.66	29.26	9.45 (UPS) 27.2 (BAT)	10.04	
Gross weight (kg)	15.78	17.3	11.1	26.63	29.76	13.18	33.16	12.97 (UPS) 30.2 (BAT)	13.56	

● Derate capacity to 70% in CUCF mode and to 90% when the output voltage is adjusted to 208Vac.  
● S means standard model, H means long time model.  
● All specifications subject to change without notice.  
● Custom-made specifications are acceptable.