

ND9326P

Core+ AI 8-Channel NVR with Embedded PoE

H.265/H.264 • 4K Display • 8 x PoE Port • RAID 0, 1 • Deep Search

Technical Specifications

Device

| | |
|-------------------|---|
| Model | ND9326P |
| Watchdog | Hardware + Software |
| Power Restoration | System Restart Automatically after Power Recovery |
| Reset Button | YES |

Display

| | |
|--------------------|--|
| LiveView Display | 8 Channels Multi Layout Display: 1x1, 2x2, 3x3, 1M+5, 1P+3, 1P+6, 2P+3, 3V |
| Video Output | HDMI x1, VGA x1 |
| Display Resolution | 3840x2160, 1920x1080, 1280x720 HDMI up to 3840 x2160, VGA up to 1920 x1080p |
| Fisheye Dewarp | Local: 1O, 1P, 1R, 1O3R, 1O8R, 1P3R Web: 1O, 1R, 1P |
| PTZ Operation | Direction Control, Home, Iris, Preset, Patrol (Group) |


Video

| | |
|---------------------|--|
| Video Format | MJPEG, H.264, H.265 |
| Graphic Decoder | Hardware decoding |
| Decoding Resolution | Up to 7680x2560 |
| Decoding Capability | H.265/H.264: 3840x2160 @ 120 fps (4-CH) 1920x1080 @ 240 fps (8-CH) |


Audio

| | |
|--------------|---|
| Audio Format | G.711, G.726 |
| Audio In/Out | 3.5 Phone Jack Audio Output x1 3.5 Phone Jack Audio Input x1 |

Record

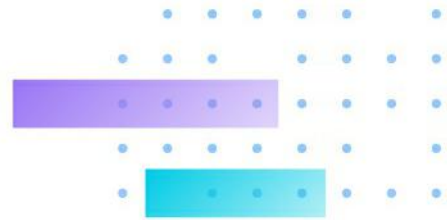

| | |
|---------------------------------------|--|
| Recording Time (sec.) | Pre-Record: 5 (Max. 10) Post-Record: 20 (Max. 300) |
| Recording Throughput | 192 Mbps |
| Recording Mode | Continuous, Schedule, Manual, Event |
| Recording Setting | Recycle (unit: Day) |
| Storage & Backup | |
| HDD Devices | Internal x2 (3.5") |
| RAID | RAID 0,1 |
| Disk Management | Create, Format and Remove Disk HDD S.M.A.R.T |
| External Storage | USB Storage (USB 3.0) |
| Video Clip Export | USB Dongle (FAT Format) |
| Schedule Backup | FTP |
| Playback | |
| Playback Display | 4 Channels Multi Layout Display |
| Playback Control | Regular (Play, Pause, Stop), Rewind, Next / Previous Frame, Speed Control, Calendar, Event, Timeline, Timeline Scale, Thumbnail (Storyboard) |
| Video Search | By calendar, date/time, and alarm |
| Thumbnail Explorer (Storyboard) | Listing the thumbnail of recorded video (Max. 2 CH) |
| Snapshot | JPEG |
| Video Clip Export | Supported |
| Network | |
| Ethernet | 10/100/1000Mbps Ethernet (RJ-45) x2 |
| Network Throughput Input/Output Total | 224Mbps |
| PoE | 802.3at/af compliant PoE ports x 8 (total Max. 120W) |
| PoE Management | Supported |
| Protocols | IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, SMTP, FTP, DHCP, NTP, DNS, DDNS |
| External Interface | |
| USB | Front x1 (USB 3.0) Back x2 (USB 2.0) |
| Alarm In | 4 |
| Alarm Out | 1 |
| Audio | 3.5 Phone Jack Audio Output x1 3.5 Phone Jack Audio Input x1 (reserved) |
| System | |
| Camera Integration | ONVIF Profile S |
| Event | Motion Detection, Smart VCA Event, Cyber Attack, PIR Detection, Tampering Detection, Camera DI/DO, Camera Disconnected, Disk Failure, Disk Full, NVR DI/DO, PoE error |
| Event Action | Video recording, email with snapshot, buzzer, PTZ, FTP, DO (camera, system), full screen, send to CMS, VIVOCLOUD APP Notification |
| User Management | User level: administrator, regular user |
| Log | System, Recording, User, Error |
| Date & Time | Time Zone, Manual, Automatic Sync NTP, Daylight Saving Time |
| Language | Czech, English, French, German, Italian, Japanese, Korean, Portuguese, Polish, Russian, Spanish, Simplified Chinese, Traditional Chinese, Arabic |
| Deep Search | |
| Object Search | People, Vehicle |
| Scene Search | Line crossing, Intrusion, Loitering |
| Attribute Search | People: Gender, Age, Clothing Color, Accessories Vehicles: Type, Color |

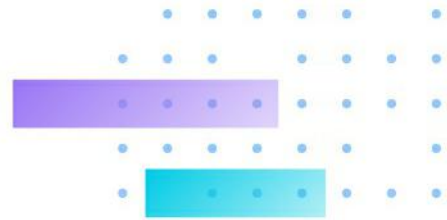

Advanced Features

| | |
|--------------------------|-----------|
| VCA Counting Solution | Supported |
| VCA Event Search | Supported |
| Smart Search II | Supported |
| Trend Micro IoT Security | Supported |
| Cybersecurity Management | Supported |

Remote Client

| | |
|-------------------|---------------------------------------|
| Software AP | Shepherd, VSS (VAST Security Station) |
| Mobile/Tablet App | iViewer (Android & iOS) |
| Web Browser | Chrome |
| VIVOCLOUD | Supported |

General

| | |
|-----------------------|--|
| Power Input | 100-240V AC, 50/60Hz |
| Power Consumption | Max. 190 W |
| Dimensions | 365 (W) x 315 (D) x 44 (H) mm |
| Weight | 2.65 kg |
| Operating Temperature | -10°C ~ 55°C (14°F ~ 131°F) |
| Humidity | 0 ~ 95% |
| Safety Certifications | CE, FCC, VCCI, C-Tick, UL, CB, BSMI, BIS |
| Warranty | 36 months |

