



## ATS1250

ATS Intelligent 4-door controller

### Data Gathering Panels

Data Gathering Panels (DGP) are used to expand the number of alarm inputs on the system and allow inputs and relays to be connected at a location remote from the Advisor MASTER panel. DGPs communicate via poll & reply messages and send alarms to the control panel for processing. The DGPs collect information from detectors, door contacts and other similar devices. There are DGPs available for conventional devices, wireless devices as well as for intelligent addressable devices. A special DGP is also available for collecting the information for either four doors or lifts.

### Product Overview

The ATS1250/1260 4-Door/Lift DGP is a versatile access control panel to extend the Advisor MASTER system with advanced access control functions. Real time alarm and access control on 4 doors, with power supply and housing. A total of 12 ATS1250 can be connected to an Advisor Master panel. To program both the controllers a user interface with liquid crystal display must be included in the system. The 4-door controller can operate off-line with no degradation in performances, should communication with the Advisor Master panel fail.

### Extensive programming features

Can be used to program a sequence of unique events for a desired outcome (macro logic). For example when a user badges a card or selects a floor, lights in the area can be programmed to turn on or a macro can activate a light on a map at a security desk to indicate a floor has been accessed.

### Connectivity


A total of 12 ATS 1250 or ATS 1260 can be connected to an Advisor Master panel. To program both the controllers a user interface with liquid crystal display must be included in the system.

### Communications

The controllers can be mounted up to 1.5 km from the Advisor Master panel, which will continuously check if the controller is still on line. The 4-door controller and the 4-lift controller can operate off-line with no degradation in performances, should communication with the Advisor Master panel fail.

### Users

The 4-door controller and the 4-lift controller are using the user information from the Advisor Master panel. The number of card

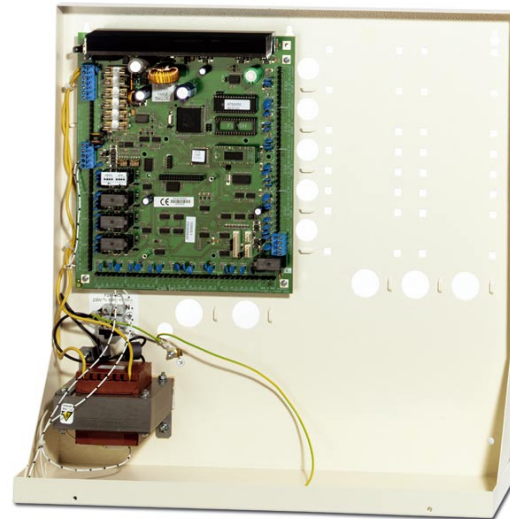

### Standard Features

- Real time alarm & access control on 4 doors
- Full mirror database for offline condition
- Max 12 4-door controllers and 48 intelligent doors/panel
- Global anti-passback
- Region control
- User counter, interlocking, card + PIN
- 16 alarm inputs on board
- 4 reader inputs with built-in interface
- Local RS485 bus for up to 16 readers
- Wide range of third party readers supported
- 4 relays on board for lock strikes
- 52 programmable outputs

# ATS1250

## ATS Intelligent 4-door controller

users is 11466. 1000 users can be programmed with a PIN code and with a name.

### Access control procedures

Access control procedures like swiping a card or entering a PIN, can be programmed to function only within particular blocks of time or outside those times. For example, during a period deemed as a high security risk, granting access may require a PIN and card to be presented at reader. At another time of low security risk, access to the same area may be gained with only the presentation of a card.

### Door groups

The 4-door controller is also using the door groups from the Advisor Master panel. Standard there are 128 door groups available.

### Timezones and holidays

The controllers can use one or more of the 24 free programmable time zones and 24 holiday slots.

### Inputs

Both controllers have 16 four state monitored inputs on board. On the 4-door controller, by default 12 inputs are assigned to DOTL alarm, Egress and door contacts, but they can also be re-programmed as regular inputs.

### Readers

The ATS 1250 and ATS 1260 support many reader formats including magnetic swipe, PIN code, proximity and Wiegand.

### Specifications

Power supply	13.8 VDC / 3 A
Battery test	Dynamic battery testing
Max. distance from panel	1.5 km
Specified cable	Aritech WCAT 52/54 or equivalent
Data bus monitoring	Continuous monitoring for off-line conditions of all devices on bus
Addressing	Individually addressed via DIP switches
Users	11466 cardholders (expandable to 65535 with IUM)
PIN codes	1000 dependant on panel memory options
Door groups	128
Time zones / Holidays	24 / 24
Zones	16 (free programmable inputs)
Relays	4 on-board (expandable to 52 with relay cards)
Operating temperature	0 to +50°C
Mains transformer	230 V 50 Hz/23 VAC 120 VA
Housing dimensions (W x H x D)	475 x 460 x 160 mm

### Ordering Information

Part No.	Description
ATS1250	ATS Intelligent 4-door controller
ATS1250MBC	ATS1250 Mother Board Card
ATS1260UP	ATS Intelligent 4-Lift Controller Upgrade Package
ATS1251	ATS Intelligent 4-door Controller, 12V, Big Enclosure
ATS1252	ATS Intelligent 4-door Controller, 24V, Big Enclosure
ATS1253	ATS Intelligent 4-door Controller, 12V, Small Enclosure
ATS1254	ATS Intelligent 4-door Controller, 24V, Small Enclosure
ATS1160N	ATS Mifare DESFire & EV1 Reader with Output & RTE
ATS1161N	ATS Mifare DESFire & EV1 Reader with PIN, output & RTE
ATS1170	ATS Reader interface (Single door controller)
ATS1151	ATS Aluminium Keypad
ATS1156	ATS Aluminium Magstripe Card Reader With Keypad
ATS1190X4	ATS Smart Card Reader 4 pcs
ATS1190	ATS Smart Card Reader
ATS1192X4	ATS Heavy-duty Smart Card Reader 4 pcs
ATS1192	ATS Heavy-duty Smart Card Reader
ATS1197	ATS Smart Card Reader with keypad
ATS1471	ATS keyfob
ATS1473	ATS keyfob, blue
ATS1475	ATS proximity card, packed by 10 pcs.
ATS1477	ATS fibertag.

