

# DC101B

Surface mount contact wired - brown

#### DC101-Series

The DC101-Series surface mount magnetic contacts are designed for use in installations where a small, sealed unit is required. The reed switch is totally encapsulated in an exclusive polyurethane potting compound preventing moisture from entering the switch and causing false alarms.

#### Easy installation

The 16 mm standard gap distance allows for fast, easy installation and prevents false alarms from loose fitting doors. Recessed mounting holes make for clean-looking installations.

### High Quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



#### **Standard Features**

- Convenient surface mounting
- Standard 2 m wire length
- Tamper loop provided
- Neat and tidy design

# DC101B

Surface mount contact wired - brown


## Specifications

General	
Application type	Surface Mount
Connectivity	4 wires, 2 m
Wired/wireless	
Wired-Wireless	Wired
Physical	
Operating Gap	15 mm
Physical dimensions	51 x 9 x 9 mm
Colour	Brown
Standards & regulation	
EN50131 Grade	Grade 2

### **Ordering Information**

Part No.	Description
DC101BS60	Surface mount contact wired - brown - 6m Cable
DC101B	ARITECH,MAC,SURFACE MOUNT,8" SUPERVISED LOOP WIRE WITH SPECIAL PACKAGING

DC101BS1

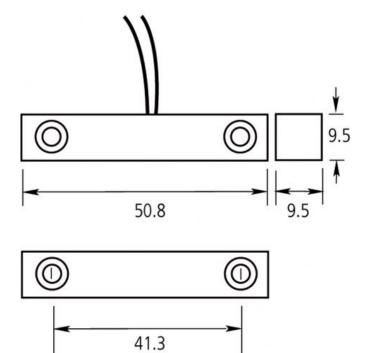

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative. DC101B-2018-06-28 07:02:01 Released :25-JAN-18