


8 + 2 Port Giga PoE Switch

PoES-08130GC+2G

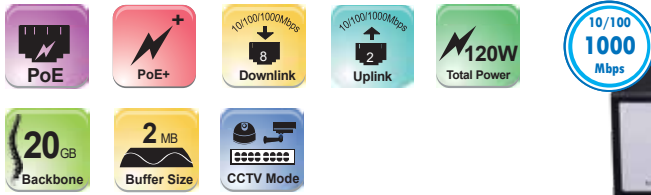

- Downlink: 8 x 1Gbps Ports
- Uplink: 2 x 1Gbps Port
- 120W (Avg:15W Max 30W per ch)
- Distance: Up to 100 Meter
- Built-in Surge Protection
- External Power Supply
- Complies With IEEE802.3af/at
- CCTV mode:
 - Up to 250 meter at 10Mbps
 - Vlan function: no communication among downlink ports
- Wall Bracket

Specifications

MODEL	PoES-08130GC+2G	
Interface	Downlink Ports	8 x 10/100/1000Mbps
	Uplink Ports	2 x 10/100/1000Mbps
	SFP Ports	No
PoE	PoE Ports	8 (Downlink Ports)
	PoE Standard	IEEE802.3af/at PoE
	PoE Total Power	120W
	Average Power Per Channel	15W
	Maximum Power Per Channel	30W
Data Processing	Backbone Bandwidth	20Gbps
	Buffer Size	2Mb
	MAC Address Table	8K
	VLAN	2 Auto Modes (In CCTV Mode)
Network Media	EIA/TIA-568	100Ω STP (Maximum 100m)
	10BASE-T	UTP Category 3, 4, 5 Cable (Maximum 100m)
	100BASE-TX	UTP Category 5, 5e Cable (Maximum 100m)
	1000BASE-T	UTP Category 5e, 6, 7 Cable (Maximum 100m)
Special	CCTV Mode	Selectable Standard/CCTV Mode
	Surge Protector	Built-In (±4KV)
	Wall Bracket	Optional
	Rack Bracket	No
Power	PoE Status Monitor	Yes
	Power Supply	54v/2.2A
	Power Consumption	PoE On: 124W Max. / PoE Off: 7W Max.
Others	Fan	Yes
	Dimensions	280×180.8×44mm
	Weight	1.8kg
	Operating Temperature	-0°C-40°C

