

## DS-3E1105P-EI

### Smart Managed 4-Port 100 Mbps PoE Switch

Smart managed switches are developed by Hikvision, featuring in easy management and maintenance. You can easily deploy, monitor and expand your surveillance system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance.



Visualized Topology Management



Network Health Monitor



Real-Time Alarm Push



Video Control and Preview

### Key Feature

- 4 × 100 Mbps PoE RJ45 ports, 1 × 100 Mbps network RJ45 port.
- IEEE 802.3at/af standard for PoE ports.
- Network topology management, alarm push, network health monitor.
- 6 KV surge protection for PoE ports.
- AF/AT camera can reach up to 300 m in extend mode.




## Specification


| Model              |  | DS-3E1105P-EI   |
|--------------------|--|---|
| Network parameters | Port number  | 4 × 100 Mbps PoE RJ45 ports, and 1 × 100 Mbps network RJ45 port.  |
|                    | Port type  | RJ45 port, full duplex, MDI/MDI-X adaptive  |
|                    | Standard   | IEEE 802.3, IEEE 802.3u, and IEEE 802.3x  |
|                    | Forwarding mode  | Store-and-forward switching   |
|                    | Working mode   | Standard mode (default), Extend mode  |
|                    | High priority ports  | Ports 1 and 2   |
|                    | Ports for long-distance transmission   | Ports 1 to 4  |
|                    | MAC address table  | 2 K   |
|                    | Switching capacity   | 1 Gbps  |
|                    | Packet forwarding rate   | 0.744 Mpps  |
|                    | Internal cache   | 768 Kbits   |
| PoE power supply   | PoE standard   | Ports 1 to 4: IEEE 802.3af, IEEE 802.3at  |
|                    | PoE power pin  | Ports 1 to 4: Ethernet cables 1/2/3/6 and 4/5/7/8 provide power supply simultaneously.  |
|                    | PoE port   | Ports 1 to 4  |
|                    | Max. port power  | 30 W  |
|                    | PoE power budget   | 60 W  |
| Software function  | Device maintenance   | Support remote upgrade, recovering default parameters, viewing logs, configuring basic network parameters.  |
|                    | Typology display   | Support typology display.   |
|                    | Port configuration   | Support rate, flow control, and switch configuration  |
|                    | PoE function   | IEEE 802.3at/af device provides power supply.   |
|                    | Device status alarm  | Support the device status, PoE_MAX and PoE status alarm.  |
|                    | Network management   | Support client management.  |
| General            | Port statistics  | Support port transmitting/receiving real-time rate statistics, 7-day transmitting/receiving peak rate statistics.   |
|                    | Shell  | Metal material, fan-free design   |
|                    | Net Weight   | 0.22 kg (0.49 lb)   |
|                    | Dimension (L × H × D)  | 105 mm × 27.6 mm × 83.1 mm (4.76" × 3.47" × 1.09")  |
|                    | Operating temperature  | 0°C to 40°C (32°F to 104°F)   |
|                    | Storage temperature  | -40°C to 85°C (-40°F to 185°F)  |
|                    | Operating humidity   | 5% to 95% (no condensation)   |
|                    | Storage humidity   | 5% to 95% (no condensation)   |
|                    | Power supply   | 48 VDC, 1.35 A  |
| Approval           | Max. power consumption   | 65 W  |
|                    | Power source   | 65 W  |
|                    | EMC  | FCC (47 CFR Part 15, Subpart B); CE-EMC (EN 55032: 2015, EN 61000-3-2: 2014, EN 61000-3-3: 2013, EN 55024: 2010 +A1: 2015); RCM (AS/NZS CISPR 32: 2015); IC (ICES-003: Issue 6, 2016) |
| Safety             | UL (UL 60950-1); CB (IEC 60950-1:2005 + Am 1:2009 + Am 2:2013); CE-LVD (EN 60950-1:2005 + Am 1:2009 + Am 2:2013) |   |
| Chemistry          | CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)                                    |   |

## Physical Interface

Front panel:

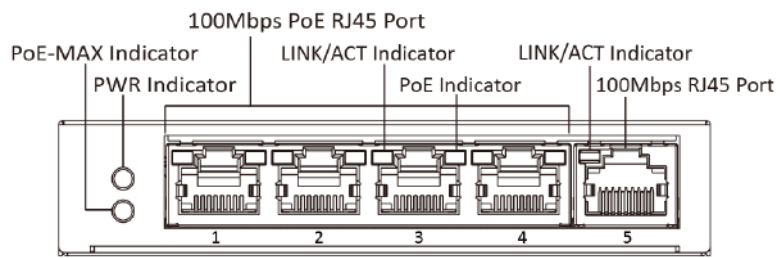


Rear panel:

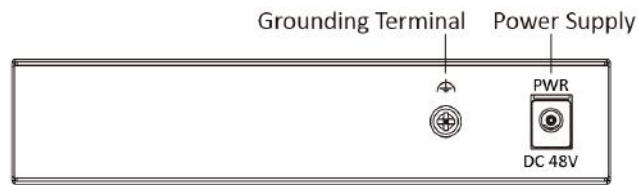


## Available Model

DS-3E1105P-EI

## Dimension (unit: mm)

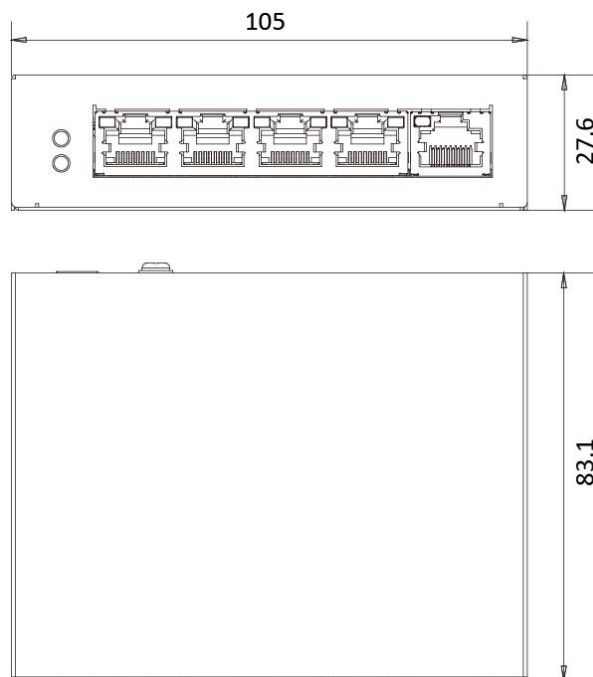

## Typical Application

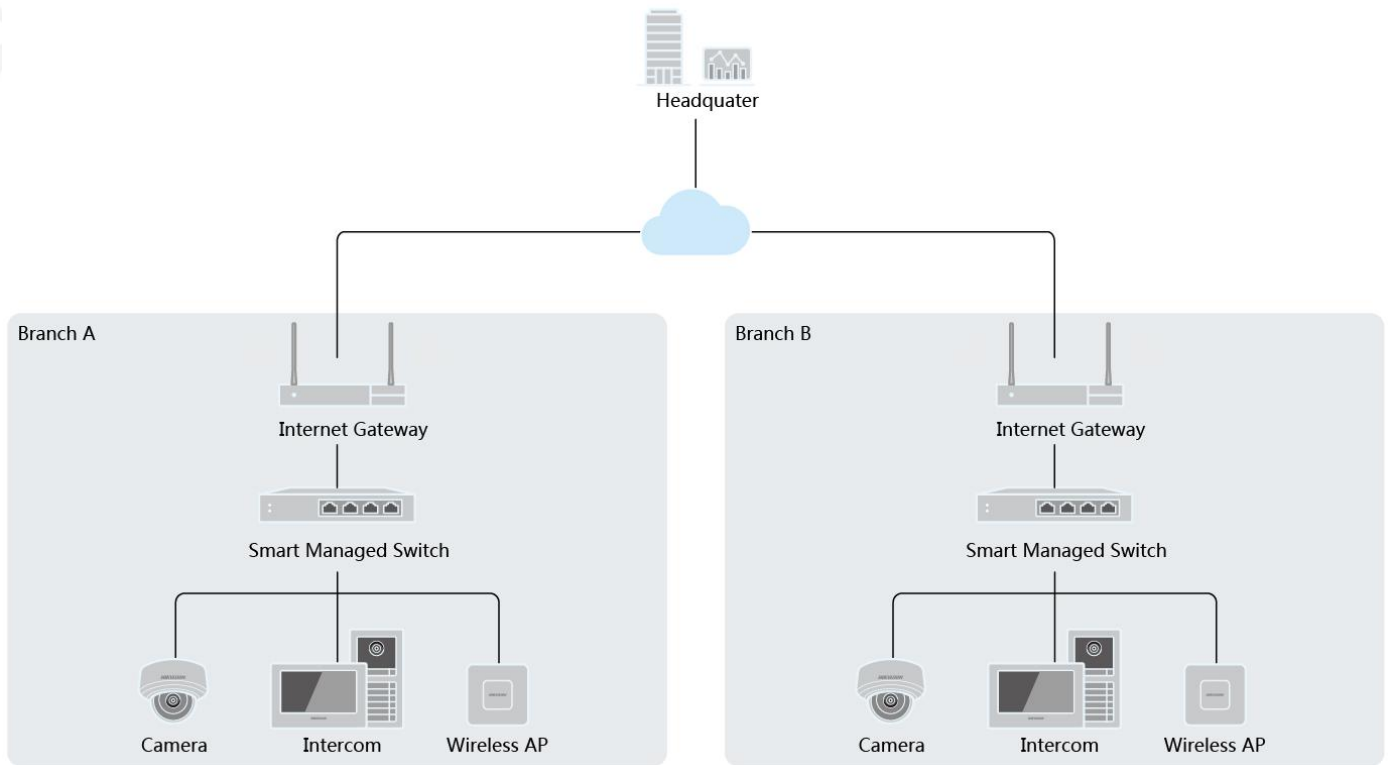

Distributed by



## HIKVISION®

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
sateru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com